




AR1-010C-14-NA-CHP

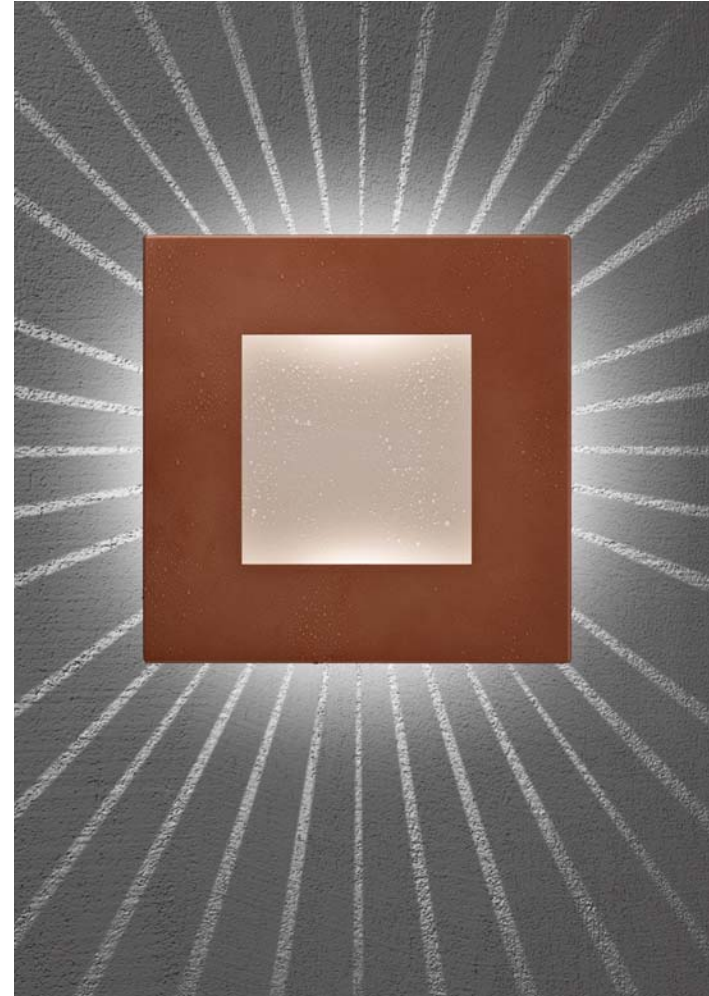







AR2-010C-14-NA-CMP/AWP-LSP



FEATURES


- The Arcadia is formed from non-ferrous 0.080" thick aluminum.
- A choice of colors are offered for the metal insert panel.
- "Light Spray" option creates a unique radial pattern on the wall surface.
- Custom face perforations are possible. Consult factory for information.
- Lamp is enclosed in a threaded, fully-gasketed vapor lock jelly jar.
- Tool-less access to lamp.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of metal halide and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>AR1</p>  <p>AR2</p>  <p>AR3</p>  <p>AR4</p>	<p>010B OUTDOOR SCNCE</p>  <p>010C RECESSED OUTDOOR SCNCE</p> 	14	NA NONE AVAILABLE	<p>PTD PAINTED – SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p> <p>NOTE: FOR COMBO FINISH, LIST MAIN COLOR OF THE FIXTURE FOLLOWED BY THE COLOR OF THE INSERT PANEL. EXAMPLE: GRAPHITE METALLIC PAINTED FINISH WITH SKY WHITE PAINTED INSERT PANEL WOULD BE "GRP/SWP"</p>	<p>14"</p> <p>1MH70 1@70W MH</p> <p>1MH100 1@100W MH (12410.0)</p> <p>1IN100 1@100W IN</p> <p>1IN150 1@150W IN</p>	<p>120</p> <p>277</p> <p>347</p>	<p>LSP LIGHT SPRAY</p> <p>FUS FUSED</p> <p>IBS INTEGRAL BALLAST (010B ONLY)</p>
<p>▾ SPECIFY CATALOG CODE</p>							




SAMPLE CODE: **AR2-010C-14-NA-CMP/AWP-1MH70-120-LSP**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM



- Fixture is available as a recessed or surface mount depending on selected hanging system.
- Remote mounted F-can ballast standard for metal halide lamping (20' max for 100W).
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



010B
(SURFACE MOUNT)

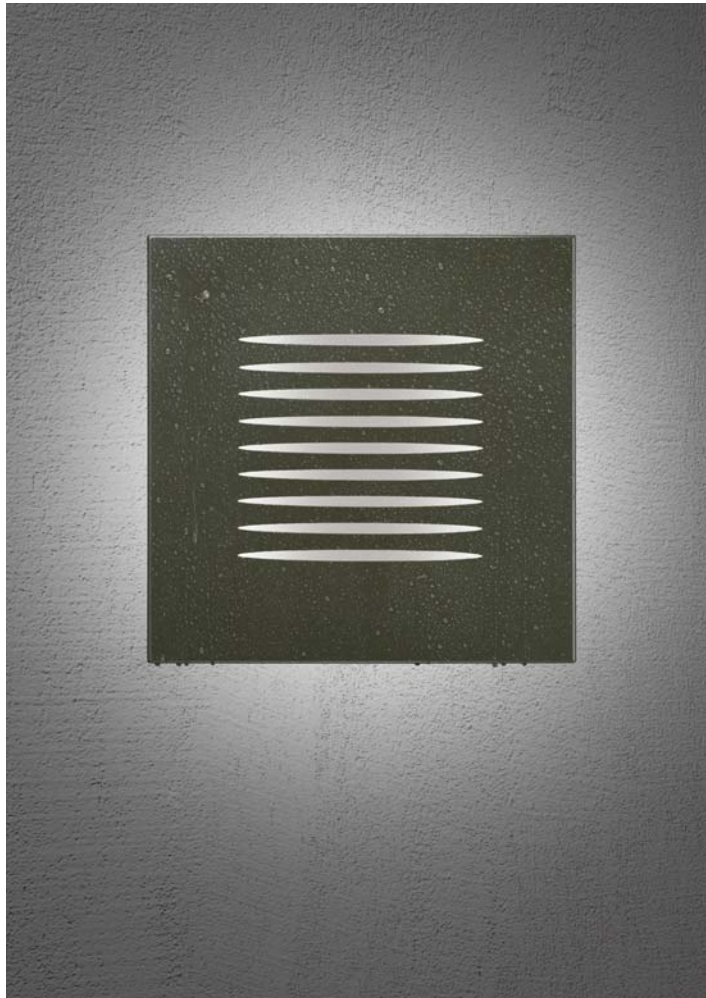







AR3-010C-14-NA-BNP/AWP



AR4-010C-14-NA-MWP/BLP

FEATURES

- The Arcadia is formed from non-ferrous 0.080" thick aluminum.
- A choice of colors are offered for the metal insert panel.
- "Light Spray" option creates a unique radial pattern on the wall surface.
- Custom face perforations are possible. Consult factory for information.
- Lamp is enclosed in a threaded, fully-gasketed vapor lock jelly jar.
- Tool-less access to lamp.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of metal halide and incandescent optic packages.
- Contact factory for additional modifications or options.


SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>AR1</p>  <p>AR2</p>  <p>AR3</p>  <p>AR4</p>	<p>010B OUTDOOR SCNCE</p>  <p>010C RECESSED OUTDOOR SCNCE</p> 	14	NA NONE AVAILABLE	<p>PTD PAINTED – SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p> <p>NOTE: FOR COMBO FINISH, LIST MAIN COLOR OF THE FIXTURE FOLLOWED BY THE COLOR OF THE INSERT PANEL. EXAMPLE: GRAPHITE METALLIC PAINTED FINISH WITH SKY WHITE PAINTED INSERT PANEL WOULD BE "GRP/SWP"</p>	<p>14"</p> <p>1MH70 1@70W MH</p> <p>1MH100 1@100W MH (12410.0)</p> <p>1IN100 1@100W IN</p> <p>1IN150 1@150W IN</p>	<p>120</p> <p>277</p> <p>347</p>	<p>LSP LIGHT SPRAY</p> <p>FUS FUSED</p> <p>IBS INTEGRAL BALLAST (010B ONLY)</p>
<p>▾ SPECIFY CATALOG CODE</p>							

OUTDOOR

SAMPLE CODE: AR4-010C-14-NA-MWP/BLP-1MH70-120-FUS

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture is available as a recessed or surface mount depending on selected hanging system.
- Remote mounted F-can ballast standard for metal halide lamping (20' max for 100W).
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



010B
(SURFACE MOUNT)