



ARIEL™ PENDANT



AL1-P4AA-26-GW-SGP

MATCHING FIXTURES



page 52



page 342






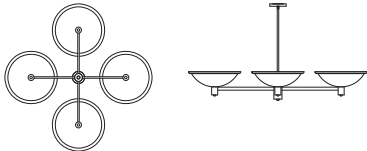
page 452



page 488

FEATURES

- The low-profile trim ring of the Ariel was originally designed for the University of Toledo bookstore.
- A transitional design makes it a welcome piece for both contemporary and traditional applications.
- Spun from solid, non-ferrous 0.040" thick brass or 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS	
 <p>AL1</p>	<p>P2AA DOUBLE CLUSTER PENDANT WITH A SINGLE CENTER STEM</p> 	16	<p>GW GLOSS WHITE ACRYLIC</p>	<p>PAL POLISHED ALUMINUM</p>	<p>16"</p>	120	48	<p>DMA ADVANCE® DIMMING BALLAST</p> <p>DML LUTRON® DIMMING BALLAST</p> <p>EMI INTEGRAL EMERGENCY</p> <p>FUS FUSED</p> <p>TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)</p> <p>CIB CLEAR INNER BOWL</p> <p>ULD UL DAMP LABEL</p>	
			<p>MW MATTE WHITE ACRYLIC</p>	<p>BAL BRUSHED ALUMINUM</p>					<p>2QD26 2@26W QD (13771.0)</p>
		26	<p>FA FAUX ALABASTER ACRYLIC</p>	<p>PTR PEWTER</p>	<p>26"</p>	347	<p>NOTE: ON ALL BRASS AND PLATED FINISHES, CLUSTER ARMS WILL BE POWDER COAT PAINTED.</p>		<p>NOTE: LAMPING LISTED IS PER BOWL.</p>
			<p>NH NATURAL HORN ACRYLIC</p>	<p>PBR POLISHED BRASS</p>					
		<p>P3AA TRIPLE CLUSTER PENDANT WITH A SINGLE CENTER STEM</p> 	<p>ET ETRUSCAN ACRYLIC</p>	<p>ABR ANTIQUE BRASS</p>	<p>4QD26 4@26W QD (10989.0)</p>	<p>PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>			
			<p>WS WHITE SWIRL ACRYLIC</p>	<p>STB STATUARY BRONZE</p>	<p>4TT32 4@32W TT (9529.0)</p>				
	<p>P4AA QUAD CLUSTER PENDANT WITH A SINGLE CENTER STEM</p> 		<p>SNK SATIN NICKEL</p>	<p>2BX39 2@39W BX (13772.0)</p>					
	<p>ORB OIL RUBBED BRONZE</p>		<p>3IN150 3@150W IN (13742.0)</p>						

↓ SPECIFY CATALOG CODE

SAMPLE CODE: **AL1-P4AA-26-GW-SGP-4TT32-120-48-DML**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture requires structural mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- If sloped-ceiling adapter is required, consult factory for details.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.