



ARIEL™ PENDANT



AL1-P1AA-26-GW-SGP

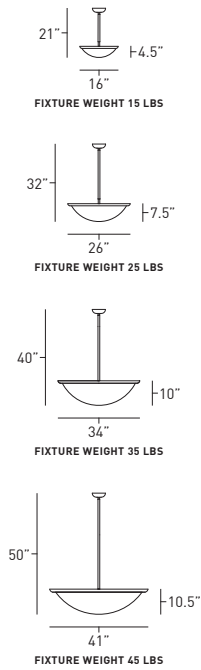

AL1-P1ED-26-GW-BAL

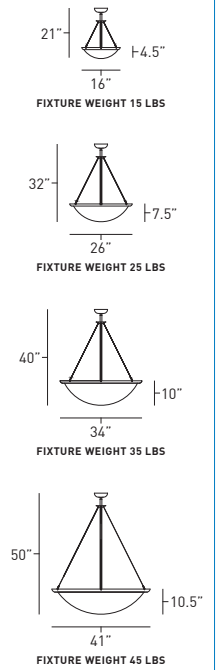

▼ MATCHING FIXTURES



page 58



page 342








page 452



page 488

▼ FEATURES

- The low-profile trim ring of the Ariel was originally designed for the University of Toledo bookstore.
- A transitional design makes it a welcome piece for both contemporary and traditional applications.
- Spun from solid, non-ferrous 0.040" thick brass or 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

| SERIES | HANGING SYSTEM | SIZE | DIFFUSER | FINISH | LAMPING (PHOTOMETRIC TEST #) | VOLTAGE | OAH SPECIFY IN INCHES | OPTIONS | |
|--|---|------|--|---|---|--|--------------------------|---|-----------|
|  <p>AL1</p> | P1AA PENDANT WITH A SINGLE CENTER STEM  | 16 | GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC | PAL POLISHED ALUMINUM BAL BRUSHED ALUMINUM | 16" 20D26 2@26W QD (13771.0) 2IN100 2@100W IN (7135.0) | 120 277 347 | 21 | DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST | |
| | | | FA FAUX ALABASTER ACRYLIC NH NATURAL HORN ACRYLIC | PBR POLISHED BRASS BBR BRUSHED BRASS | 26" 40D26 4@26W QD (10989.0) 4TT32 4@32W TT (9529.0) | 32 | | EMI INTEGRAL EMERGENCY FUS FUSED | |
| | P1AD PENDANT WITH 3 VERTICAL SATELLITE STEMS AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY  | 26 | NH NATURAL HORN ACRYLIC ET ETRUSCAN ACRYLIC | ABR ANTIQUE BRASS STB STATUARY BRONZE | 26" 2BX39 2@39W BX (13772.0) 3IN150 3@150W IN (13742.0) | 32 | 32 | EMI INTEGRAL EMERGENCY FUS FUSED | |
| | | | WS WHITE SWIRL ACRYLIC | ORB OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 34" 80D26 8@26W QD (12189.0) 6BX39 6@39W BX (8668.0) 6BX40 6@40W BX 6BX50 6@50W BX 6BX55 6@55W BX 6IN150 6@150W IN (13743.0) | 40 | | | |
| | P1AH PENDANT WITH 3 ANGLED STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY  | 34 | WS WHITE SWIRL ACRYLIC | ORB OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 34" 80D26 8@26W QD (12189.0) 6BX39 6@39W BX (8668.0) 6BX40 6@40W BX 6BX50 6@50W BX 6BX55 6@55W BX 6IN150 6@150W IN (13743.0) | 40 | 40 | CIB CLEAR INNER BOWL ULD UL DAMP LABEL TRC TRIPLE CIRCUIT DNL PAR DOWN LIGHT BFL BOTTOM FINIAL (SEE BELOW) | |
| | | | | | P1ED PENDANT WITH 3 ANGLED AIRCRAFT CABLES TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY  | 41" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0) | | | 50 |
| | <p> <input type="checkbox"/> SPECIFY CATALOG CODE </p> | | | | | | | | |

SAMPLE CODE: AL1-P1ED-26-GW-BAL-4TT32-120-30-DML

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM





- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- Bottom finial option increases overall height by length of the finial.

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Par down light option available in combination with a variety of compact fluorescent reflectors.
- For metal halide lamping contact factory.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.







BFL
BOTTOM FINIAL

ARIEL™ PENDANT



AL1-P1AH-26-FA-ABR



AL1-P1AD-26-WS-BNP

MATCHING FIXTURES



page 58



page 342



page 452








page 488

FEATURES

- The low-profile trim ring of the Ariel was originally designed for the University of Toledo bookstore.
- A transitional design makes it a welcome piece for both contemporary and traditional applications.
- Spun from solid, non-ferrous 0.040" thick brass or 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.

- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

| SERIES | HANGING SYSTEM | SIZE | DIFFUSER | FINISH | LAMPING (PHOTOMETRIC TEST #) | VOLTAGE | OAH SPECIFY IN INCHES | OPTIONS |
|--|---|------|--|---|--|--|--------------------------|--|
|  AL1 | P1AA PENDANT WITH A SINGLE CENTER STEM  | 16 | GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC | PAL POLISHED ALUMINUM BAL BRUSHED ALUMINUM | 16" 20D26 2@26W QD (13771.0) 2IN100 2@100W IN (7135.0) | 120 277 347 | 21 | DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST |
| | | | FA FAUX ALABASTER ACRYLIC NH NATURAL HORN ACRYLIC | PBR POLISHED BRASS BBR BRUSHED BRASS | 26" 40D26 4@26W QD (10989.0) 4TT32 4@32W TT (9529.0) | 32 40 | | EMI INTEGRAL EMERGENCY FUS FUSED |
| | P1AD PENDANT WITH 3 VERTICAL SATELLITE STEMS AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY  | 26 | NH NATURAL HORN ACRYLIC ET ETRUSCAN ACRYLIC | ABR ANTIQUE BRASS STB STATUARY BRONZE | 26" 2BX39 2@39W BX (13772.0) 3IN150 3@150W IN (13742.0) | 32 40 | 32 | TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT) CIB CLEAR INNER BOWL ULD UL DAMP LABEL TRC TRIPLE CIRCUIT DNL PAR DOWN LIGHT BFL BOTTOM FINIAL (SEE BELOW) |
| | | | WS WHITE SWIRL ACRYLIC | ORB OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 34" 80D26 8@26W QD (12189.0) 6BX39 6@39W BX (8668.0) 6BX40 6@40W BX 6BX50 6@50W BX 6BX55 6@55W BX 6IN150 6@150W IN (13743.0) | 40 50 | | |
| | P1AH PENDANT WITH 3 ANGLED STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY  | 34 | WS WHITE SWIRL ACRYLIC | ORB OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 34" 80D26 8@26W QD (12189.0) 6BX39 6@39W BX (8668.0) 6BX40 6@40W BX 6BX50 6@50W BX 6BX55 6@55W BX 6IN150 6@150W IN (13743.0) | 40 50 | 40 | TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT) CIB CLEAR INNER BOWL ULD UL DAMP LABEL TRC TRIPLE CIRCUIT DNL PAR DOWN LIGHT BFL BOTTOM FINIAL (SEE BELOW) |
| | | | | | PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 41" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0) | | |
| | P1ED PENDANT WITH 3 ANGLED AIRCRAFT CABLES TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY  | 41 | WS WHITE SWIRL ACRYLIC | ORB OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 41" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0) | 41 50 | 50 | TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT) CIB CLEAR INNER BOWL ULD UL DAMP LABEL TRC TRIPLE CIRCUIT DNL PAR DOWN LIGHT BFL BOTTOM FINIAL (SEE BELOW) |
| | | | | | PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | 41" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0) | | |

☑ SPECIFY CATALOG CODE

SAMPLE CODE: AL1-P1AD-26-WS-BNP-4TT32-120-30-DML

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- Bottom finial option increases overall height by length of the finial.

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Par down light option available in combination with a variety of compact fluorescent reflectors.
- For metal halide lamping contact factory.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



BFL
BOTTOM FINIAL