




FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS



FIXTURE WEIGHT 8 LBS



AT1-010A-24-GW-SMP

ADA

MATCHING FIXTURES



page 242

FEATURES

- All decorative faces are made from 0.125" thick extruded aluminum.
- Faces are precision cut with a laser. Custom laser-cut designs are possible. Consult factory for details.
- Extruded aluminum back channel is 2.50" wide and 0.125" thick with a matte anodized protective coating.
- Features solid aluminum die-cast ends with die-cut silicone foam gaskets.
- Extruded neoprene rubber gasket runs the length of the diffuser on both sides.
- 3/16" thick extruded virgin white acrylic is 45% DR high impact, UV stable, F1 rated, and UL-94 HB Flame Class rated.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>AT1</p>  <p>AT2</p>  <p>AT3</p>	<p><b>010A</b> OUTDOOR ADA COMPLIANT SCNCE</p> 	24	<p><b>GW</b> GLOSS WHITE ACRYLIC</p>	<p>PTD PAINTED – SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	24" 	<p><b>120</b></p> <p><b>277</b></p> <p><b>347</b></p>	<p><b>DMA</b> ADVANCE® DIMMING BALLAST</p> <p><b>DML</b> LUTRON® DIMMING BALLAST</p> <p><b>EMR</b> REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY)</p> <p><b>EMI</b> INTEGRAL EMERGENCY (48"/60" SIZES ONLY)</p> <p><b>FUS</b> FUSED</p> <p><b>SJB</b> MOUNTING COVER FOR STANDARD 4" J-BOX (SEE BELOW)</p> <p><b>TPS</b> TAMPER PROOF SCREWS</p>
		36			<p><b>1LF14</b> 1@14W T5</p> <p><b>1LF24</b> 1@24W T5H0 (12627.0)</p> <p>36" </p> <p><b>1LF21</b> 1@21W T5</p> <p><b>1LF39</b> 1@39W T5H0 (12629.0)</p>		
		48			<p>48" </p> <p><b>1LF28</b> 1@28W T5</p> <p><b>1LF54</b> 1@54W T5H0 (12631.0)</p>		
		60			<p>60" </p> <p><b>1LF35</b> 1@35W T5</p> <p><b>1LF80</b> 1@80W T5H0 (13794.0)</p>		
<p>↓ SPECIFY CATALOG CODE</p>							

SAMPLE CODE: **AT1-010A-24-GW-SMP-1LF14-120-FUS**


↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 2" x 4" switch box (supplied by others), and requires additional anchors. See options section for standard 4" J-box mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating, 0°F/ -18°C starting temperature (3-5 year ballast warranty depending on ballast specification).


- Armet can be mounted vertically or horizontally.
- Fixture is ADA compliant.
- Tamper-proof stainless steel screws available as an option.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.




**SJB**  
MOUNTING COVER FOR  
STANDARD 4" J-BOX




FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS




FIXTURE WEIGHT 8 LBS




AT1-010A-24-GW-SMP

ADA

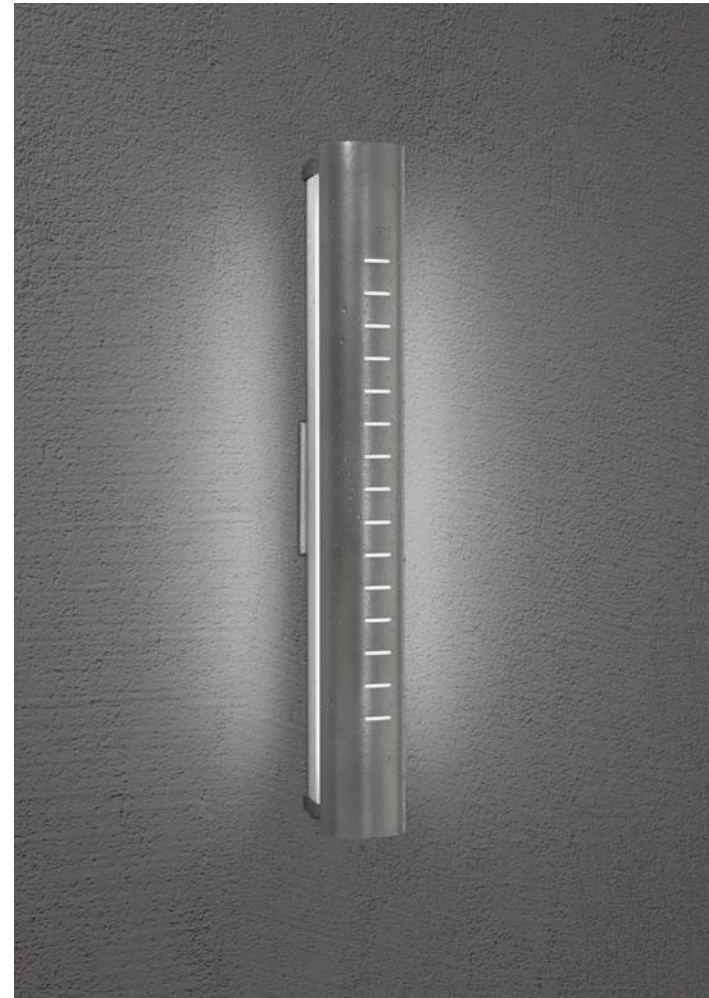


AT2-010A-24-GW-GRP


ADA




FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS



FIXTURE WEIGHT 8 LBS

MATCHING FIXTURES



page 242

FEATURES

- All decorative faces are made from 0.125" thick extruded aluminum.
- Faces are precision cut with a laser. Custom laser-cut designs are possible. Consult factory for details.
- Extruded aluminum back channel is 2.50" wide and 0.125" thick with a matte anodized protective coating.
- Features solid aluminum die-cast ends with die-cut silicone foam gaskets.
- Extruded neoprene rubber gasket runs the length of the diffuser on both sides.
- 3/16" thick extruded virgin white acrylic is 45% DR high impact, UV stable, F1 rated, and UL-94 HB Flame Class rated.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>AT1</p>  <p>AT2</p>  <p>AT3</p>	<p><b>010A</b> OUTDOOR ADA COMPLIANT SCNCE</p> 	24	<p><b>GW</b> GLOSS WHITE ACRYLIC</p>	<p>PTD PAINTED – SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	24" 	<p><b>120</b></p> <p><b>277</b></p> <p><b>347</b></p>	<p><b>DMA</b> ADVANCE® DIMMING BALLAST</p> <p><b>DML</b> LUTRON® DIMMING BALLAST</p> <p><b>EMR</b> REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY)</p> <p><b>EMI</b> INTEGRAL EMERGENCY (48"/60" SIZES ONLY)</p> <p><b>FUS</b> FUSED</p> <p><b>SJB</b> MOUNTING COVER FOR STANDARD 4" J-BOX (SEE BELOW)</p> <p><b>TPS</b> TAMPER PROOF SCREWS</p>
		36			<p><b>1LF14</b> 1@14W T5</p> <p><b>1LF24</b> 1@24W T5H0 (12627.0)</p> <p>36" </p> <p><b>1LF21</b> 1@21W T5</p> <p><b>1LF39</b> 1@39W T5H0 (12629.0)</p>		
		48			<p>48" </p> <p><b>1LF28</b> 1@28W T5</p> <p><b>1LF54</b> 1@54W T5H0 (12631.0)</p>		
		60			<p>60" </p> <p><b>1LF35</b> 1@35W T5</p> <p><b>1LF80</b> 1@80W T5H0 (13794.0)</p>		
<p>↓ SPECIFY CATALOG CODE</p>							

SAMPLE CODE: **AT2-010A-24-GW-GRP-1LF14-120-FUS**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 2" x 4" switch box (supplied by others), and requires additional anchors. See options section for standard 4" J-box mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating, 0°F/ -18°C starting temperature (3-5 year ballast warranty depending on ballast specification).

- Armet can be mounted vertically or horizontally.
- Fixture is ADA compliant.
- Tamper-proof stainless steel screws available as an option.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



**SJB**  
MOUNTING COVER FOR  
STANDARD 4" J-BOX

OUTDOOR