




FIXTURE WEIGHT 4 LBS




FIXTURE WEIGHT 5 LBS




FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS

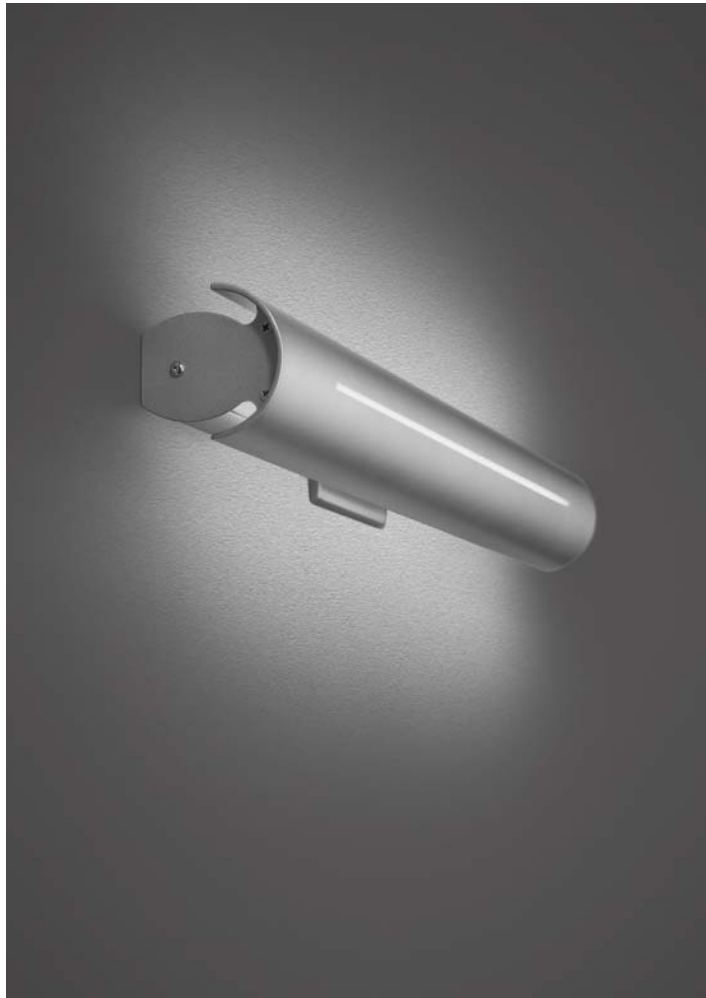

AT1-S1SA-24-GW-SMP

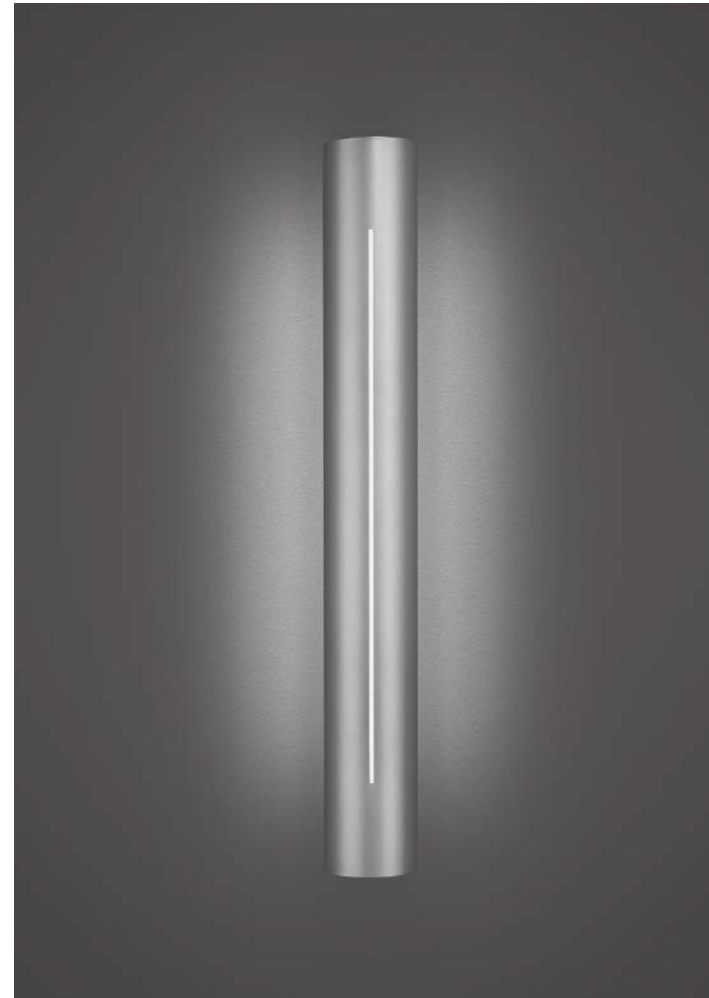

AT1-S1SA-24-GW-SMP






▾ MATCHING FIXTURES



page 374

▾ FEATURES

- The Armet series was inspired by a knights helmet developed in the 15th century.
- 1.50" wide matte anodized, aluminum extruded back channel.
- All decorative faces are made from 0.125" thick extruded aluminum.
- Faces are precision cut with a laser. Custom laser-cut designs are possible. Consult factory for details.
- The Armet can be mounted vertically or horizontally and is available in a variety of lengths.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 AT1  AT2  AT3	S1SA INDOOR ADA COMPLIANT SCNCE 	24	GW GLOSS WHITE ACRYLIC	BAL BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	24" 	120	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMR REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY) EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY) ULD UL DAMP LABEL FUS FUSED SJB MOUNTING COVER FOR STANDARD 4" J-BOX (SEE BELOW)
		36			1LF14 1@14W T5 1LF24 1@24W T5H0 (12627.0) 36" 	277 347	
		48			1LF21 1@21W T5 1LF39 1@39W T5H0 (12629.0) 48" 		
		60			1LF28 1@28W T5 1LF54 1@54W T5H0 (12631.0) 60" 		
					1LF35 1@35W T5 1LF80 1@80W T5H0 (13794.0)		
 SPECIFY CATALOG CODE							

SAMPLE CODE: **AT1-S1SA-24-GW-SMP-1LF14-120-ULD**


 PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 2" x 4" switch box (supplied by others), and requires additional anchors. See options section for standard 4" J-box mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).


- Fixture is ADA compliant.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.




SJB
MOUNTING COVER FOR STANDARD 4" J-BOX




FIXTURE WEIGHT 4 LBS




FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS

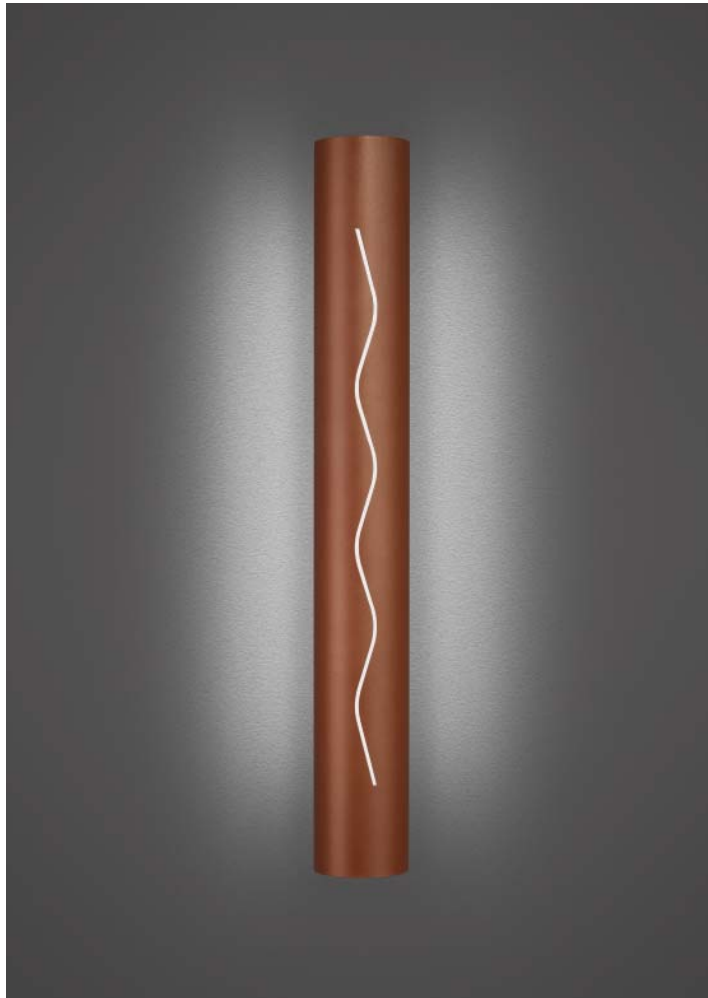


AT3-S1SA-24-GW-CMP

ADA




AT2-S1SA-24-GW-GRP


ADA




FIXTURE WEIGHT 4 LBS



FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS


MATCHING FIXTURES



page 374

FEATURES

- The Armet series was inspired by a knights helmet developed in the 15th century.
- 1.50" wide matte anodized, aluminum extruded back channel.
- All decorative faces are made from 0.125" thick extruded aluminum.
- Faces are precision cut with a laser. Custom laser-cut designs are possible. Consult factory for details.
- The Armet can be mounted vertically or horizontally and is available in a variety of lengths.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 AT1  AT2  AT3	S1SA INDOOR ADA COMPLIANT SCNCE 	24	GW GLOSS WHITE ACRYLIC	BAL BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	24" 	120	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMR REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY) EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY) ULD UL DAMP LABEL FUS FUSED SJB MOUNTING COVER FOR STANDARD 4" J-BOX (SEE BELOW)
		36			1LF14 1@14W T5 1LF24 1@24W T5H0 (12627.0) 36" 	277 347	
		48			1LF21 1@21W T5 1LF39 1@39W T5H0 (12629.0) 48" 		
		60			1LF28 1@28W T5 1LF54 1@54W T5H0 (12631.0) 60" 		
					1LF35 1@35W T5 1LF80 1@80W T5H0 (13794.0)		
 SPECIFY CATALOG CODE							

SAMPLE CODE: **AT2-S1SA-24-GW-GRP-1LF14-120-FUS**

 PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 2" x 4" switch box (supplied by others), and requires additional anchors. See options section for standard 4" J-box mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).

- Fixture is ADA compliant.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



SJB
MOUNTING COVER FOR STANDARD 4" J-BOX