



AVALON™ PENDANT



AV1-P1AE-23-GW-BAL

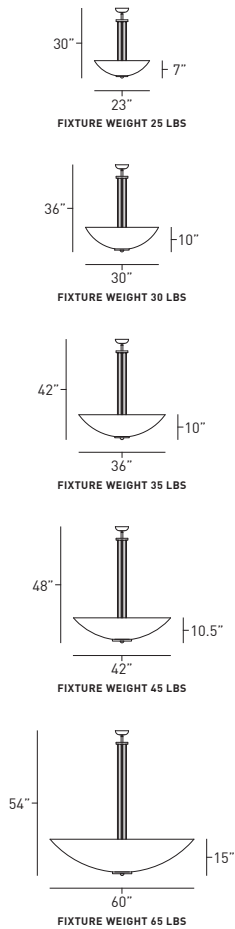

AV1-P1AD-23-GW-SMP

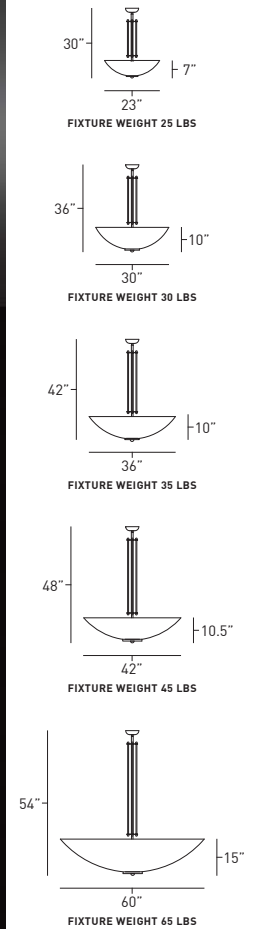

MATCHING FIXTURES



page 124



page 330



page 332








page 462



page 482

FEATURES

- The simple, shallow dome of the Avalon is accented by vertical hanging systems.
- Available in diameters up to 72".
- Constructed with solid, non-ferrous brass or aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>AV1</p>	P1AA PENDANT WITH A SINGLE CENTER STEM 	23	GW GLOSS WHITE ACRYLIC	PAL POLISHED ALUMINUM	23"	120	30	DMA ADVANCE® DIMMING BALLAST
			MW MATTE WHITE ACRYLIC	BAL BRUSHED ALUMINUM	40D26 4@26W QD (10989.0)	277		DML LUTRON® DIMMING BALLAST
	P1AB PENDANT WITH A SINGLE CENTER STEM AND A LARGER DIAMETER NON-TAPERED BOTTOM SECTION 	30	FA FAUX ALABASTER ACRYLIC	PBR POLISHED BRASS	3IN150 3@150W IN (13742.0)	347	36	EMI INTEGRAL EMERGENCY
			NH NATURAL HORN ACRYLIC	BBR BRUSHED BRASS	30"	80D26 8@26W QD (12189.0)		FUS FUSED
	P1AD PENDANT WITH 3 VERTICAL SATELLITE STEMS AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY 	36	NH NATURAL HORN ACRYLIC	STB STATUARY BRONZE	4BX39 4@39W BX (9640.0)	42	42	TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)
			ET ETRUSCAN ACRYLIC	SNK SATIN NICKEL	6BX39 6@39W BX (8668.0)			6IN150 6@150W IN (13743.0)
	P1AE PENDANT WITH 4 VERTICAL STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY 	42	WS WHITE SWIRL ACRYLIC	ORB OIL RUBBED BRONZE	PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	36"	48	TRC TRIPLE CIRCUIT
						8TT32 8@32W TT (13746.0)		
						6BX40 6@40W BX		
						6BX50 6@50W BX (13745.0)		
						6BX55 6@55W BX		
						6IN150 6@150W IN (13743.0)		
						42"		
						9BX39 9@39W BX		
						9BX40 9@40W BX		
						9BX50 9@50W BX (13747.0)		
60	9BX55 9@55W BX	8IN150 8@150W IN (13744.0)	54					
		60"						
		12BX39 12@39W BX						
		12BX40 12@40W BX						
		12BX50 12@50W BX (13748.0)						
		12BX55 12@55W BX						
8IN150 8@150W IN (13744.0)								

↓ SPECIFY CATALOG CODE






SAMPLE CODE: AV1-P1AD-23-GW-SMP-4TT32-120-30-FUS

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For metal halide lamping contact factory.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.






AVALON™ PENDANT



AV1-P1AB-23-GW-PBR



AV1-P1AA-23-GW-SWP

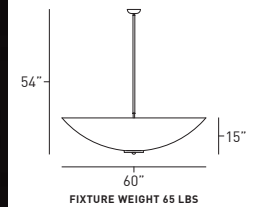

MATCHING FIXTURES



page 124



page 330



page 332








page 462



page 482

FEATURES

- The simple, shallow dome of the Avalon is accented by vertical hanging systems.
- Available in diameters up to 72".
- Constructed with solid, non-ferrous brass or aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>AV1</p>	P1AA PENDANT WITH A SINGLE CENTER STEM 	23	GW GLOSS WHITE ACRYLIC	PAL POLISHED ALUMINUM	23"	120	30	DMA ADVANCE® DIMMING BALLAST
			MW MATTE WHITE ACRYLIC	BAL BRUSHED ALUMINUM	40D26 4@26W QD (10989.0)	277		DML LUTRON® DIMMING BALLAST
	P1AB PENDANT WITH A SINGLE CENTER STEM AND A LARGER DIAMETER NON-TAPERED BOTTOM SECTION 	30	FA FAUX ALABASTER ACRYLIC	PBR POLISHED BRASS	3IN150 3@150W IN (13742.0)	30"	36	EMI INTEGRAL EMERGENCY
			NH NATURAL HORN ACRYLIC	BBR BRUSHED BRASS	80D26 8@26W QD (12189.0)			FUS FUSED
			ET ETRUSCAN ACRYLIC	ABR ANTIQUE BRASS	4BX39 4@39W BX (9640.0)			TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)
			WS WHITE SWIRL ACRYLIC	STB STATUARY BRONZE	6BX39 6@39W BX (8668.0)			ULD UL DAMP LABEL
	P1AD PENDANT WITH 3 VERTICAL SATELLITE STEMS AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY 	36	PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	SNK SATIN NICKEL	6IN150 6@150W IN (13743.0)	36"	42	TRC TRIPLE CIRCUIT
				ORB OIL RUBBED BRONZE	8TT32 8@32W TT (13746.0)			
	P1AE PENDANT WITH 4 VERTICAL STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY 	42	6BX40 6@40W BX 6BX50 6@50W BX (13745.0)	6BX39 6@39W BX	6@150W IN (13743.0)	42"	48	
				6BX40 6@40W BX				
				6BX50 6@50W BX				
				9BX39 9@39W BX				
				9BX40 9@40W BX				
				9BX50 9@50W BX (13747.0)				
				9BX55 9@55W BX				
				8IN150 8@150W IN (13744.0)				
60	12BX39 12@39W BX 12BX40 12@40W BX 12BX50 12@50W BX (13748.0) 12BX55 12@55W BX 8IN150 8@150W IN (13744.0)	60"	54					
				8IN150 8@150W IN (13744.0)				
				12BX39 12@39W BX				
				12BX40 12@40W BX				

↓ SPECIFY CATALOG CODE

SAMPLE CODE: AV1-P1AA-23-GW-SWP-4TT32-120-30-FUS

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For metal halide lamping contact factory.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.