


## INSTALLATION INSTRUCTIONS

### KWYET PENDANT WITH P1FG HANGING SYSTEM

These instructions cover the KWYET Luminaire with the following options:

SERIES	HANGING SYSTEM	SIZE	DOWNLIGHT OPTION	LIGHT SOURCE	CONTROL	WIRE DIAGRAM
KW4 (KWYET SPHERE)	P1FG: PENDANT WITH 5" FLAT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); REMOTE DRIVER ENCLOSURE	21"	NO DOWNLIGHT	STATIC WHITE	DMX: DIMMABLE TO 0.1%	WIRE DIAGRAM A ON PAGE 5
		33"				
		21"	WITH DOWNLIGHT	STATIC WHITE	DMX: DIMMABLE TO 0.1%	WIRE DIAGRAM B ON PAGE 6
		33"				

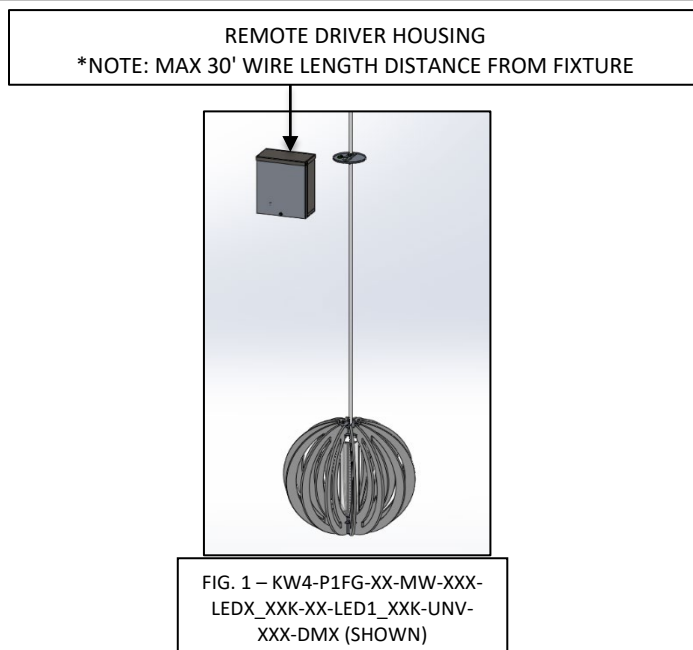

#### GENERAL NOTES:

- PLEASE COMPLETELY READ THE INSTALL INSTRUCTIONS BEFORE STARTING INSTALLATION.
- INSTALL IN ACCORDANCE WITH ALL LOCAL, STATE AND NATIONAL CODES CONSULT WITH A QUALIFIED ELECTRICIAN FOR PROPER INSTALLATION.
- CAREFULLY UNPACK ALL CONTENTS; SOME COMPONENTS MAY HAVE BEEN SHIPPED IN SEPARATE BOXES. MOST FIXTURES ARE SHIPPED PARTIALLY ASSEMBLED. SOME UNASSEMBLY MAY BE REQUIRED FOR INSTALLATION.
- REMOTE MOUNTING DRIVERS - OCL RECOMMENDS: MAX 30' WIRE LENGTH DISTANCE FROM FIXTURE FOR NON-DIMMING AND DM1. MAX 10' WIRE LENGTH REMOTE DISTANCE FOR LUTRON. ENCLOSURE SHOULD REMAIN ACCESSIBLE AFTER INSTALLATION.
- DO NOT LET THE KWYET LUMINAIRE HANG FREE UNTIL AIRCRAFT CABLE IS SECURED AND EVENLY TENSIONED.
- FIXTURE POWER CORD WIRES ARE LOW- VOLTAGE. DO NOT CONNECT TO LINE VOLTAGE OR DAMAGE TO THE FIXTURE WILL OCCUR AND WARRANTY WILL BE VOIDED.
- DUE TO A CHANGE IN NEC SECTION 410.69 EFFECTIVE IN 2022, THE COLOR PINK WILL BE USED IN PLACE OF GRAY FOR 0-10V CONTROL. NOTE THAT EXISTING SYSTEMS AND FIXTURES MANUFACTURED PRIOR TO 2022 MAY STILL USE GRAY WIRE AS AN UNGROUNDED CONDUCTOR FOR 0-10V CONTROL. CARE SHOULD BE TAKEN WHEN WORKING ON EXISTING SYSTEMS.

**OCL Architectural Lighting**

Phone: 314.863.1895  
Fax: 314.863.3278  
www.ocl.com

# Table of Contents

<b>GENERAL INFORMATION:</b> .....	<b>3</b>
<b>REMOTE DRIVER MOUNTING:</b> .....	<b>4</b>
<b>WIRE DIAGRAM A (FOR NO DOWNLIGHT):</b> .....	<b>5</b>
<b>WIRE DIAGRAM B (FOR WITH DOWNLIGHT):</b> .....	<b>6</b>
<b>KWYET MOUNTING:</b> .....	<b>7</b>
<b>KWYET MOUNTING [CANOPY]:</b> .....	<b>7</b>

# KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

## GENERAL INFORMATION:

You will receive the following with each KWYET series pendant fixture:

1. KWYET LUMINAIRE with CORD attached. (Pre-assembled as shown in FIG. 2)
2. INSTALLATION INSTRUCTIONS (shown in FIG. 3) - Please completely read the install instructions before starting installation.
3. RED BAG (shown in FIG. 3) contains below following items
  - a. CANOPY (as shown in FIG. 4)
  - b. MOUNTING KIT (as shown in FIG. 5)
    - i. STRAIN RELIEF
    - ii. MOUNTING BRACKET ASSEMBLY
    - iii. ONE (1) AIRCRAFT CABLE
    - iv. ONE (1) CEILING COUPLER (CC)
4. REMOTE DRIVER BOX WITH DRIVER INSTALLED (as shown in FIG. 6)
5. FIN (as shown in FIG. 7)

**WARNING: Examine all components for any damage before beginning installation.**

**WARNING: This fixture should be installed by a licensed electrician only.**

**WARNING: Be careful not to scratch or damage any finished parts.**

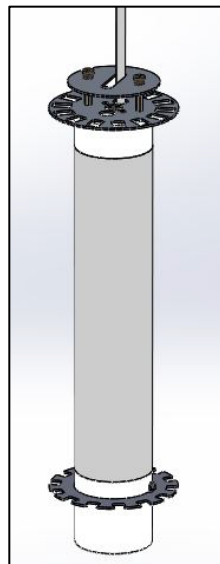


FIG. 2 -KWYET LUMINAIRE  
(PRE-ASSEMBLED)

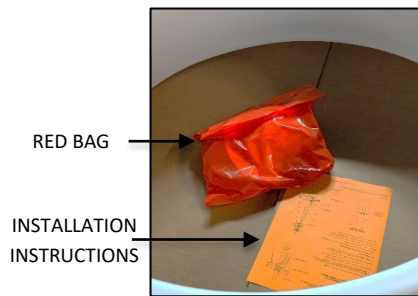


FIG. 3 RED BAG AND INSTALLATION  
INSTRUCTIONS




FIG. 4 - CANOPY

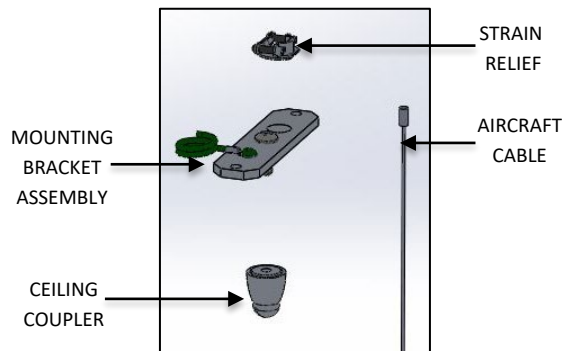


FIG. 5 – MOUNTING KIT




FIG. 6 – REMOTE DRIVER  
BOX WITH DRIVER




FIG. 7 - FIN

OCL Architectural Lighting

Phone: 314.863.1895

Fax: 314.863.3278

[www.oclighting.com](http://www.oclighting.com)

## KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

### REMOTE DRIVER MOUNTING:

1. Shut off power.
2. Remove the lid of the REMOTE DRIVER HOUSING as shown in FIG. 8 and FIG. 9 below.

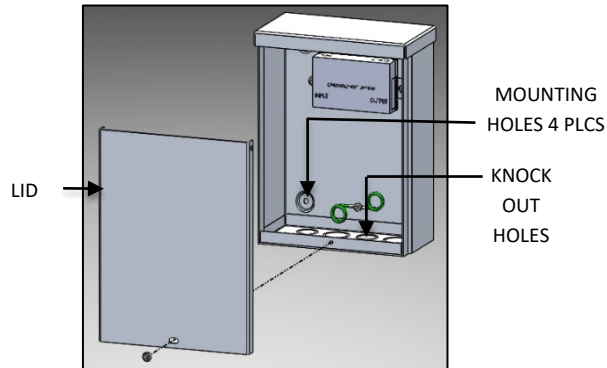


FIG. 8 – REMOTE DRIVER BOX  
ASSEMBLY FOR 1 DRIVER

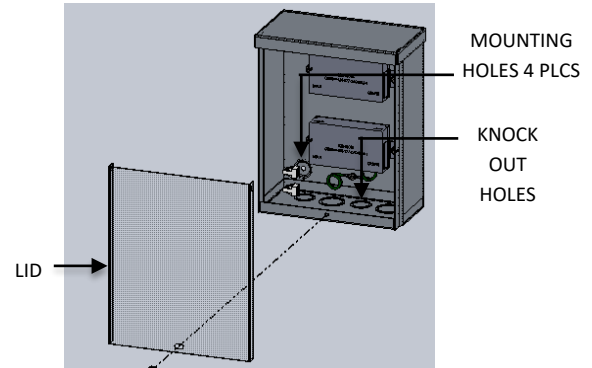


FIG. 9 – REMOTE DRIVER BOX  
ASSEMBLY FOR 2 DRIVER

3. Mount the REMOTE DRIVER HOUSING to code in a location that is 30 feet or less from the FIXTURE BODY and is accessible after installing. Max wire length is 30ft measured from the FIXTURE BODY to the DRIVER.
4. Using the knockout holes at the bottom of the remote box, run conduit into the remote box for the building supply wires (line voltage) and conduit out of the remote box for the fixture wire (low voltage). Conduit, adapters and wires are supplied by other.

**NOTE: Do not run Line Voltage and Low Voltage wires in the same conduit.**

5. Depending upon the size of the fixture (see WIRE DIAGRAM TABLE on Page 5 for correct Wire Diagram) run (1) set of positive and negative 16 or larger gauge wire (by others) or (2) set of positive and negative 16 or larger gauge wire (by others) from the REMOTE DRIVER HOUSING to the junction box the fixture will mount to (by others). Inside the REMOTE DRIVER HOUSING, connect:
  - Driver 1 LED output (+) and positive 16 or larger gauge wire (1<sup>st</sup> set).
  - Driver 1 LED output (-) and negative 16 or larger gauge wire (1<sup>st</sup> set).
  - Driver 2 (if applicable) LED output (+) and positive 16 or larger gauge wire (2<sup>nd</sup> set).
  - Driver 2 (if applicable) LED output (-) and negative 16 or larger gauge wire (2<sup>nd</sup> set).
  - Dimming wires as shown on the driver in FIG. 12 and FIG. 13 below.

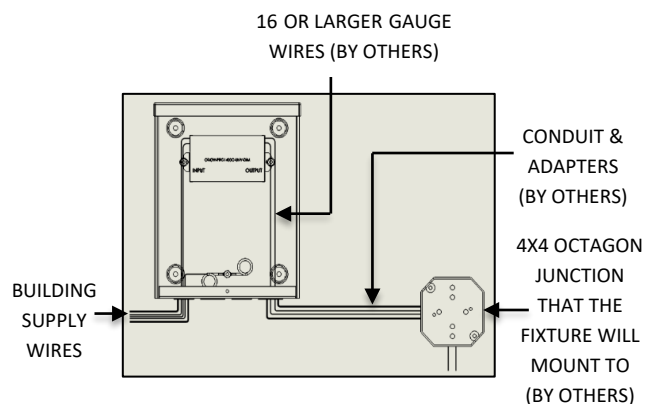


FIG. 10 – WIRE CONNECTION FROM  
BUILDING SUPPLY TO J-BOX FOR ONE  
DRIVER SETUP

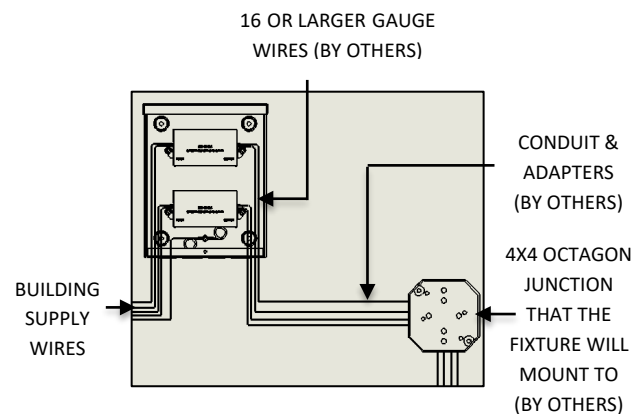


FIG. 11 – WIRE CONNECTION FROM  
BUILDING SUPPLY TO J-BOX FOR TWO  
DRIVER SETUP

OCL Architectural Lighting

Phone: 314.863.1895

Fax: 314.863.3278

[www.ocllighting.com](http://www.ocllighting.com)

# KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

- Connect building supply wires to the driver. Make all wire connections in accordance with the national electrical code and all applicable local and state codes. Refer WIRE DIAGRAM TABLE for corresponding WIRE DIAGRAM connections. Install the lid on the remote driver housing once connections are done.

WIRE DIAGRAM TABLE							
SERIES	HANGING SYSTEM	BODY SIZE	DOWNLIGHT OPTION	BODYLIGHT SOURCE	LED OUTPUT	CONTROL	WIRE DIAGRAM
KW4	P1FG	21"	NO DOWN LIGHT	STATIC WHITE	LED1 & LED2	0-10V DIM 1% (DM1)	WIRE DIAGRAM A ON PAGE 5
		33"					
		21"	WITH DOWN LIGHT	STATIC WHITE	LED1 & LED2	0-10V DIM 1% (DM1)	WIRE DIAGRAM B ON PAGE 6
		33"					

## WIRE DIAGRAM A (FOR NO DOWNLIGHT):

**DRIVER WIRES TO BUILDING SUPPLY**


BLACK WIRE = LINE VOLTAGE  
WHITE WIRE = NEUTRAL  
GREEN WIRE = GROUND  
PURPLE = 0-10V (+)  
PINK = 0-10V (-)

FIG. 12 – WIRE CONNECTION FROM BUILDING SUPPLY TO DRIVER

**WIRE LABEL TABLE**

CONTROL	WIRE COLOR	LABEL
ALL	RED	LED +
ALL	BLUE	LED -

FIG. 13 – WIRE CONNECTION FROM DRIVER TO FIXTURE CORD

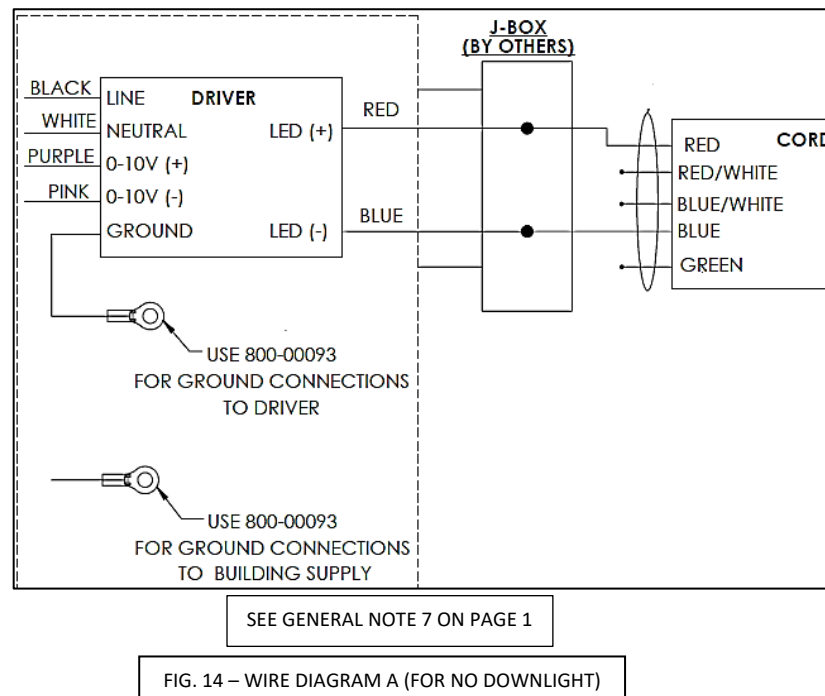

## KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

### WIRE DIAGRAM B (FOR WITH DOWNLIGHT):

#### DRIVER WIRES TO BUILDING SUPPLY


BLACK WIRE = LINE VOLTAGE  
WHITE WIRE = NEUTRAL  
GREEN WIRE = GROUND  
PURPLE = 0-10V (+)  
PINK = 0-10V (-)

FIG. 15 – WIRE CONNECTION FROM BUILDING SUPPLY TO DRIVER

#### WIRE LABEL TABLE

CONTROL	WIRE COLOR	LABEL
ALL	RED	DRIVER 1 LED (+)
ALL	BLUE	DRIVER 1 LED (-)
ALL	RED/WHITE	DRIVER 2 LED (+) (DOWNLIGHT)
ALL	BLUE/WHITE	DRIVER 2 LED (-) (DOWNLIGHT)

FIG. 16 – WIRE CONNECTION FROM DRIVER TO FIXTURE CORD

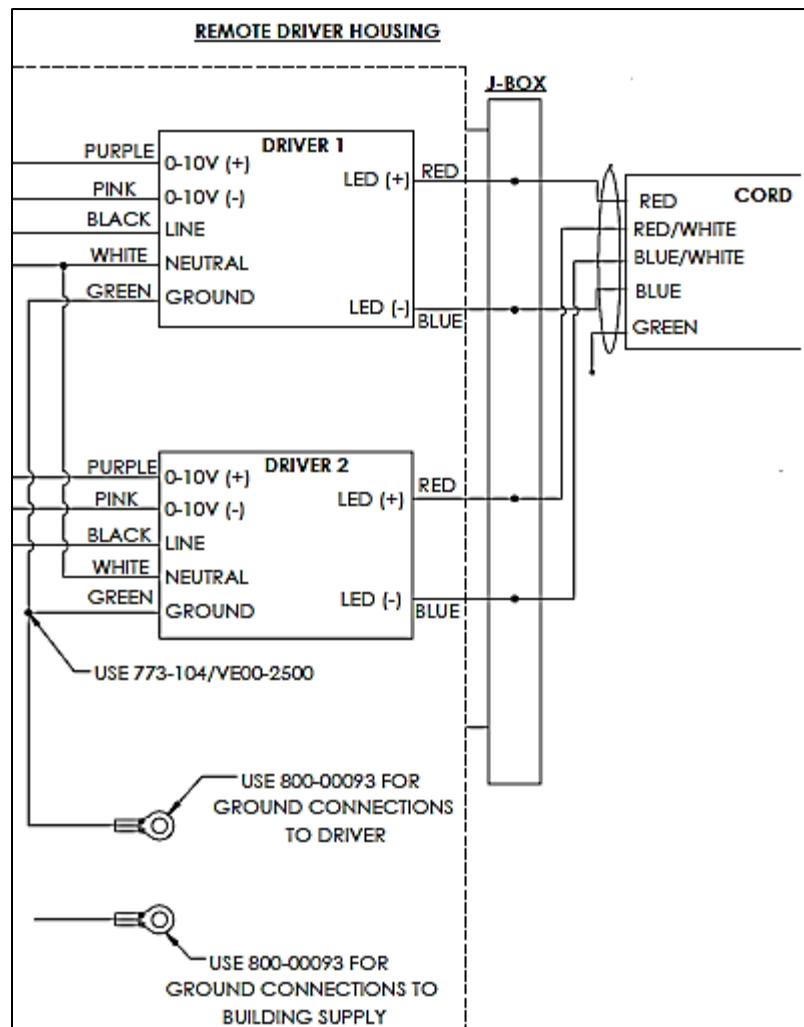

SEE GENERAL NOTE 7 ON PAGE 1

FIG. 17 – WIRE DIAGRAM B (FOR WITH DOWNLIGHT)

**OCL Architectural Lighting**

Phone: 314.863.1895

Fax: 314.863.3278

[www.oclighting.com](http://www.oclighting.com)

## KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

### KWYET MOUNTING:

#### KWYET MOUNTING [CANOPY]:

1. Dis-assemble the SLIP RING COUPLER (1) as shown below into three components SRC-BASE, SRC-HOLDER and SRC-FINIAL as shown in FIG. 18.
2. Assemble the SRC BASE to the SCREW (Available in mounting bracket assembly) as shown below in FIG.19.

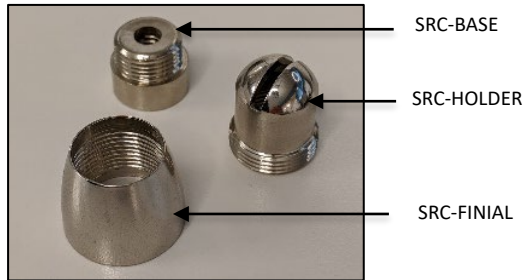


FIG. 18 – SLIP RING COUPLER (1)  
CONTENTS

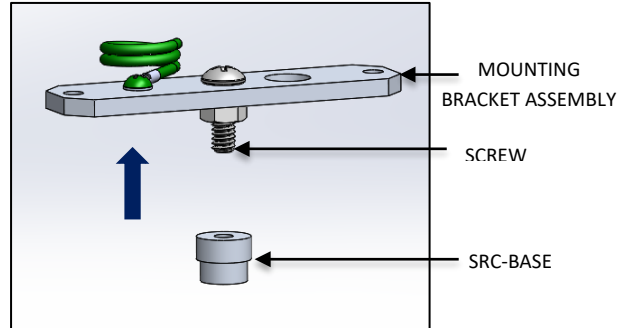


FIG. 19 – SRC-BASE INSTALLATION

3. Assemble the MOUNTING BRACKET ASSEMBLY to the JUNCTION BOX the fixture will mount to (by others) with screws (by others) as shown in FIG. 20 below.
4. Feed the AIRCRAFT CABLE through the SRC-HOLDER and assemble the SRC-HOLDER to SRC-BASE as shown below in FIG. 21.

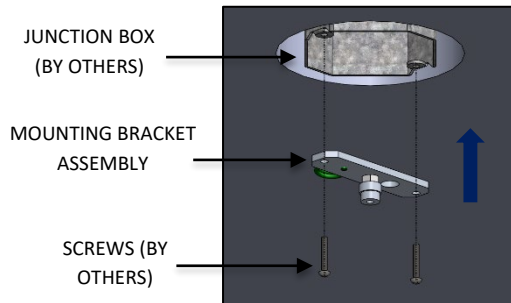


FIG. 20 – MOUNTING BRACKET  
ASSEMBLY INSTALLATION

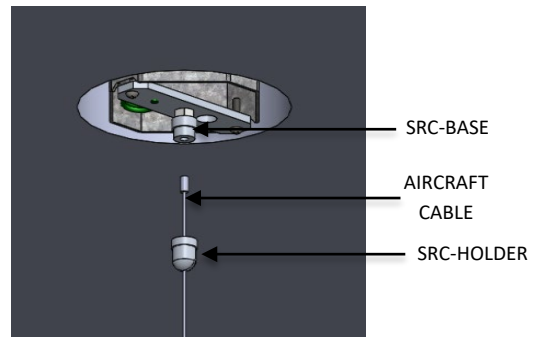


FIG. 21 – AIRCRAFT CABLE  
INSTALLATION

5. Pass the remaining Aircraft cable through the canopy and SRC-FINIAL. Loosely secure CANOPY to the ceiling by threading the SRC-FINIAL to the SRC-HOLDER as shown below in FIG. 22.

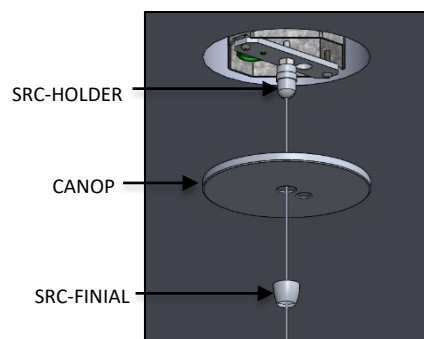


FIG. 22 – CANOPY INSTALLATION

OCL Architectural Lighting

Phone: 314.863.1895

Fax: 314.863.3278

[www.ocl.com](http://www.ocl.com)

## KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

6. Raise the fixture and feed the AIRCRAFT CABLE into the GRIPLOCK by pressing the plunger of the GRIPLOCK and insert the AIRCRAFT CABLE into the body of the GRIPLOCK and adjust fixture drop to desired height as shown in FIG. 23.
  - a. AIRCRAFT CABLE must pass at least 1.75" beyond the body of the GRIPLOCK. When cutting off excess cable always leave at least 1" of cable showing.
  - b. Cables may be cut using purpose-built cutters such as Felco C7. Cable will not fray unless passed repeatedly through the Gripper mechanism or otherwise abused.
  - c. To prevent fraying of freshly cut ends, re-solder or apply a drop of super-glue.



### WARNING:

**Do not let the FIXTURE BODY hang free until AIRCRAFT CABLE is secured and evenly tensioned.**

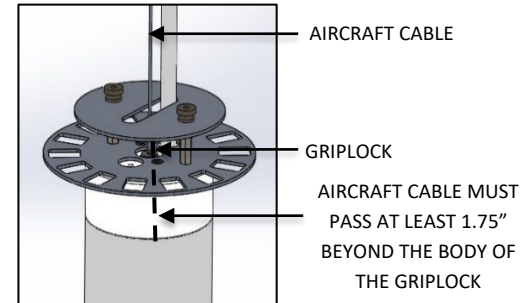


FIG. 23 – FIXTURE INSTALLATION

7. Dis-assemble the CANOPY by loosening the ceiling Coupler, and Insert CORD through CANOPY and MOUNTING BRACKET as shown below in FIG. 24. Mark cord with marker above DRIVER MOUNTING BRACKET as shown below in FIG. 25. Trim off excess CORD leaving minimum of 8.00" past the top of the DRIVER MOUNTING BRACKET all thread.

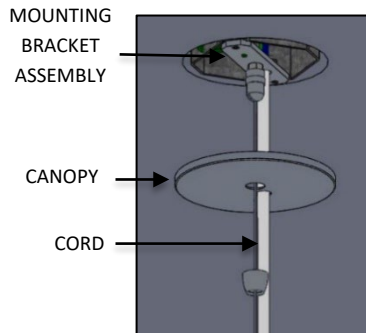


FIG. 24 -CORD INSTALLATION

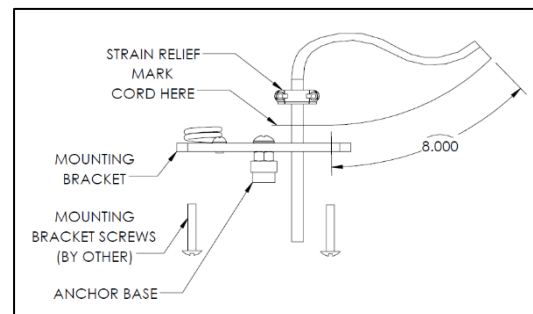


FIG. 25 – CORD MARKING

8. Insert CORD through the STRAIN RELIEF and tighten two screws on the STRAIN RELIEF above MOUNTING BRACKET where marked. If screws are not properly tightened CORD could slip through the STRAIN RELIEF. Tighten screws until there is a gap of .063" - .095" between the STRAIN RELIEF body and compression plate as shown in FIG. 26 below.

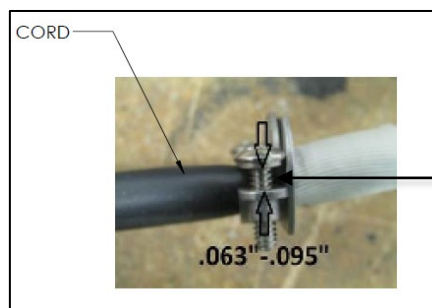


FIG. 26 – STRAIN RELIEF WITH CORD INSERTED

LEAVE A 0.063" - 0.095" GAP BETWEEN STRAIN RELIEF BODY AND COMPRESSION PLATE. OVERTIGHTEN COULD DAMAGE CORD AND UNDER TIGHTEN WON'T SUPPORT THE FIXTURE PROPERLY.

**OCL Architectural Lighting**

Phone: 314.863.1895

Fax: 314.863.3278

[www.oclighting.com](http://www.oclighting.com)



## KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

9. Make all wire connections in the inside the junction box (by others) in accordance with the national electrical code and all applicable local and state codes. See wire diagram on page 5 & 6.
10. Raise CANOPY and secure to ceiling by threading the SRC-FINIAL to SRC-HOLDER.as shown below in FIG.27.

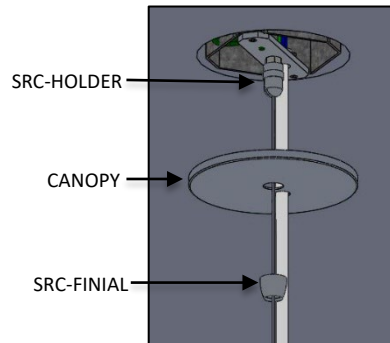


FIG. 27 – FINIAL INSTALLATION

11. Remove 2 KNURLED NUTS and raise the BRACKET COVER as shown below in FIG. 28.
12. Install the FIRST FIN by inserting the tab into the top fin bracket. Then press the notch into the bottom fin bracket to keep stable as shown below in FIG. 29.

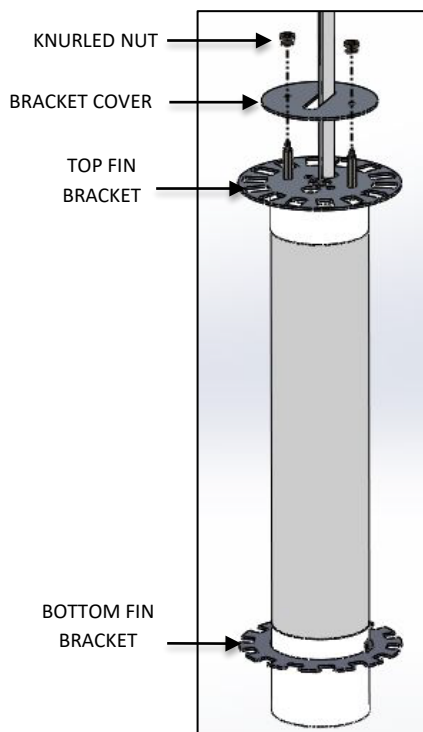


FIG. 28 – BRACKET COVER  
DIS-ASSEMBLY

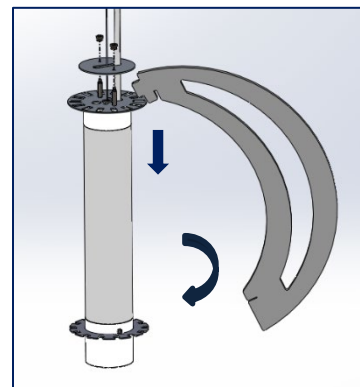


FIG. 29 – FIN INSTALLATION

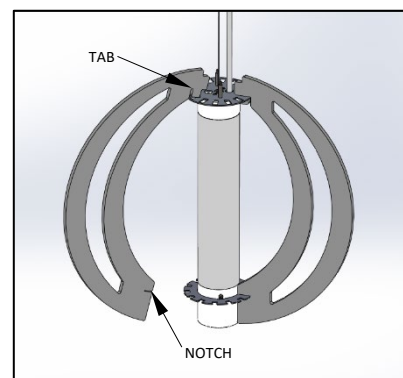


FIG. 30 – FIN INSTALLATION

## KW4-P1FG-STATIC WHITE-INSTALLATION-INSTRUCTIONS

13. Repeat step 12 for remaining fins, making sure to install fins in an opposite pattern in order to keep the fixture balanced as shown below in FIG. 31.

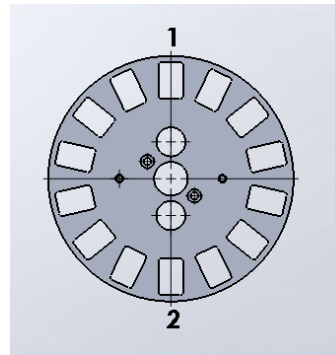


FIG. 31 – FIN INSTALLATION  
PATTERN

14. Tighten 2 KNURLED NUT and secure BRACKET COVER (Removed in step 11).
15. Restore power to circuit the KWYET series pendant is connected to.
  - a. Test to see that the luminaire turns on after power is restored.
  - b. Contact OCL for any Luminaire troubleshooting, if a problem occurs.



FIG. 32- COMPLETED INSTALLATION OF  
KWYET PENDANT P1FG HANGING  
SYSTEM