



FIXTURE WEIGHT 13 LBS



FIXTURE WEIGHT 16 LBS




FIXTURE WEIGHT 20 LBS




SC1-C1NA-16-WG-PBR




CN1-C1NA-16-WG-BKP



FIXTURE WEIGHT 13 LBS



FIXTURE WEIGHT 16 LBS



FIXTURE WEIGHT 20 LBS

MATCHING FIXTURES



page 80



page 80






page 358



page 358

FEATURES

- The Schoolhouse and Cone series feature unique styles of hand-blown opal white glass.
- This timeless fixture is available with energy efficient compact fluorescent lamping.
- Constructed with solid non-ferrous brass, aluminum or copper.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS	
 SC1  CN1	C1NA SURFACE CEILING MOUNT 	14	WG WHITE GLASS	PAL POLISHED ALUMINUM	14" 10D26 1@26W QD 1TT32 1@32W TT 1IN100 1@100W IN	120 277 347	DMA ADVANCE® DIMMING BALLAST REQUIRES 12" BALLAST CANOPY (SEE BELOW) DML LUTRON® DIMMING BALLAST REQUIRES 12" BALLAST CANOPY (SEE BELOW) EMI INTEGRAL EMERGENCY REQUIRES 12" BALLAST CANOPY (SEE BELOW) FUS FUSED ULD UL DAMP LABEL	
		16		BAL BRUSHED ALUMINUM				16" 20D26 2@26W QD 2TT32 2@32W TT (13761.0) 1TT42 1@42W TT (13762.0)
		18		PTR PEWTER				
				PBR POLISHED BRASS				
				BBR BRUSHED BRASS				
				ABR ANTIQUE BRASS				
	STB STATUARY BRONZE							
	SNK SATIN NICKEL							
	ORB OIL RUBBED BRONZE							
	PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)							


☐ SPECIFY CATALOG CODE

SAMPLE CODE: **CN1-C1NA-16-WG-BKP-2TT32-120-ULD**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

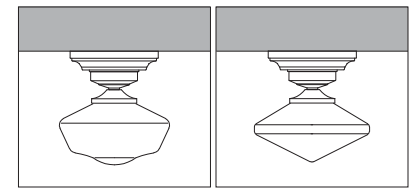

DMA/DML/EMI
12" BALLAST CANOPY

DMA/DML/EMI
12" BALLAST CANOPY