




DAUPHINE™ SCONCE



FIXTURE WEIGHT 4 LBS




FIXTURE WEIGHT 6 LBS

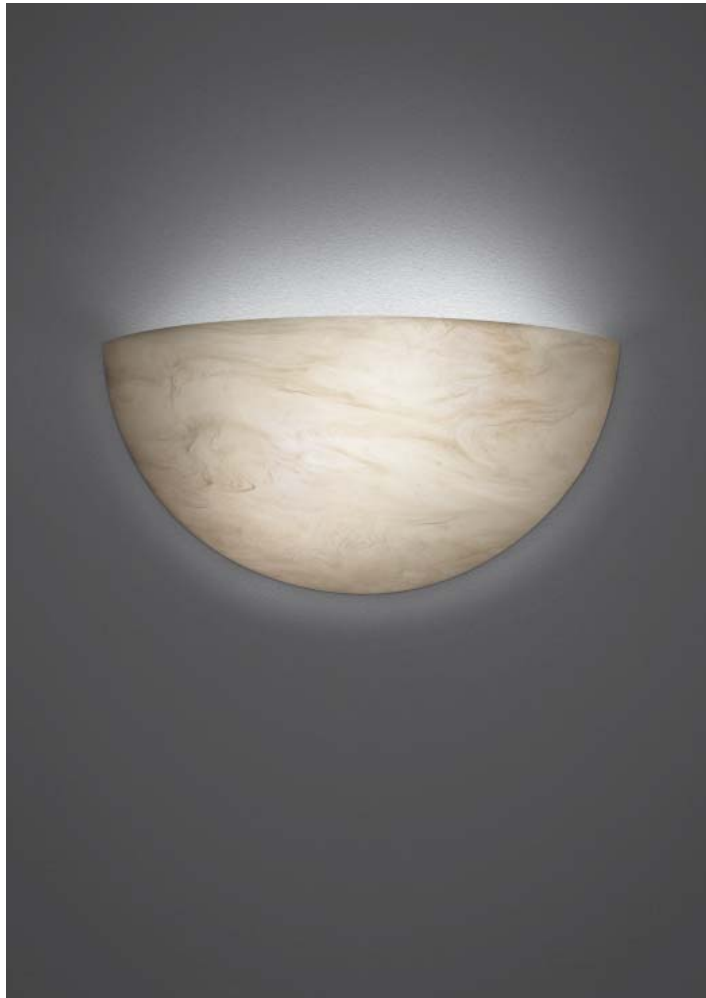


DP1-S1SA-13-FA-NFA

ADA



FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 7 LBS



DP1-S1SB-13-FA-BAL

MATCHING FIXTURES




page 132



page 464

FEATURES

- The simple dome of the Dauphine emits a soft glow.
- Traditional, minimalist design is an excellent architectural accessory.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>DP1</p>	S1SA INDOOR ADA COMPLIANT SCONCE 	13	GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC	NFA NO FINISH AVAILABLE	13"  10D26 1@26W QD (13781.0) 2IN40 2@40W IN	120 277 347	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMR REMOTE MOUNT EMERGENCY FUS FUSED ULD UL DAMP LABEL TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)
		16	FA FAUX ALABASTER ACRYLIC NH NATURAL HORN ACRYLIC ET ETRUSCAN ACRYLIC WS WHITE SWIRL ACRYLIC		16"  20D26 2@26W QD 2IN40 2@40W IN (13808.0)		
 <p>DP1</p>	S1SB INDOOR SCONCE 	13	GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC	PAL POLISHED ALUMINUM BAL BRUSHED ALUMINUM PTR PEWTER PBR POLISHED BRASS BBR BRUSHED BRASS ABR ANTIQUE BRASS STB STATUARY BRONZE SNK SATIN NICKEL ORB OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	13" 20D13 2@13W QD (13782.0) 2IN40 2@40W IN	120 277 347	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMR REMOTE MOUNT EMERGENCY FUS FUSED ULD UL DAMP LABEL TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)
		16	FA FAUX ALABASTER ACRYLIC NH NATURAL HORN ACRYLIC ET ETRUSCAN ACRYLIC WS WHITE SWIRL ACRYLIC		16" 20D26 2@26W QD (12201.0) 2IN60 2@60W IN		
 SPECIFY CATALOG CODE							

SAMPLE CODE: DP1-S1SB-13-FA-BAL-20D13-120-FUS

 PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- ADA compliant version available.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.