



DISCUS™ PENDANT

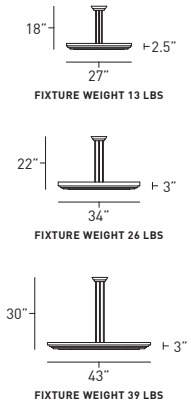

DS1-P1AC-34-ND-SGP

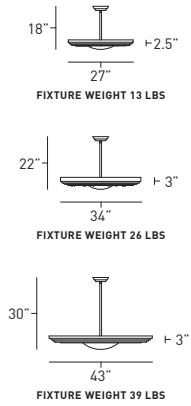

DS1-P1AA-34-RD-SWP






MATCHING FIXTURES



page 478

FEATURES

- The Discus series features OCL's new indirect performance reflector system to optimize horizontal distribution of light and to maximize luminaire efficiency. Refer to page 28 for additional information.
- Contemporary, low-profile trim is spun from 0.080" thick, non-ferrous aluminum sheet.
- Fixture is specially suited for close-to-ceiling applications where high performance and low glare are necessary.
- Several interchangeable diffuser options available.
- Acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>DS1</p>	P1AA PENDANT WITH A SINGLE CENTER STEM 	27	BL ACRYLIC BOTTOM LENS WITH GREEN TINTED EDGE	BAL BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	27" 3BX27 3@27W BX 3BX39 3@39W BX (13072.0)	120 277 347	18	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST
			BD WHITE BOTTOM ACRYLIC DOME	4TT42 4@42W TT	22	EMI INTEGRAL EMERGENCY (34"/43" SIZES ONLY)		
	P1AC PENDANT WITH 3 VERTICAL STEMS 	34	RL WHITE RECESSED ACRYLIC LENS	34" 6BX39 6@39W BX 6BX40 6@40W BX (12584.1)		30	EMR REMOTE MOUNT EMERGENCY (27" SIZE ONLY)	
			RD WHITE RECESSED ACRYLIC DOME	6BX50 6@50W BX	FUS FUSED			
	P1EC PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO CANOPY 	43	ND NO DIFFUSER	43" 6BX55 6@55W BX 9BX39 9@39W BX 9BX40 9@40W BX (13083.0)	30	ULD UL DAMP LABEL TRC TRIPLE CIRCUIT		
				9BX50 9@50W BX 9BX55 9@55W BX				
	P1EE PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO MID-POINT COLLECTOR AND A SINGLE CENTER STEM FROM COLLECTOR TO CANOPY 							

☑ SPECIFY CATALOG CODE


SAMPLE CODE: DS1-P1AA-34-RD-SWP-6BX39-120-22-DMA

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM


- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy (standard on all hanging systems, except "P1AC" & "P1EC").
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Fixture features a high performance reflector made of MIRO® 4 aluminum, which is 95% reflective (only available for biax lamps).

- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

DISCUS™ PENDANT

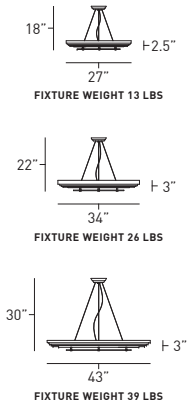

DS1-P1EC-34-BL-BAL

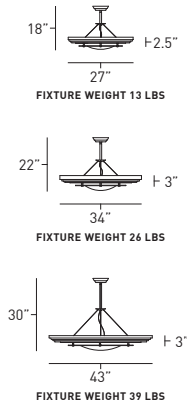

DS1-P1EE-34-BD-SMP






MATCHING FIXTURES



page 478

FEATURES

- The Discus series features OCL's new indirect performance reflector system to optimize horizontal distribution of light and to maximize luminaire efficiency. Refer to page 28 for additional information.
- Contemporary, low-profile trim is spun from 0.080" thick, non-ferrous aluminum sheet.
- Fixture is specially suited for close-to-ceiling applications where high performance and low glare are necessary.
- Several interchangeable diffuser options available.
- Acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>DS1</p>	P1AA PENDANT WITH A SINGLE CENTER STEM 	27	BL ACRYLIC BOTTOM LENS WITH GREEN TINTED EDGE	BAL BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	27" 3BX27 3@27W BX 3BX39 3@39W BX (13072.0)	120 277 347	18 22	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMI INTEGRAL EMERGENCY (34"/43" SIZES ONLY)
			BD WHITE BOTTOM ACRYLIC DOME	4TT42 4@42W TT	34"	6BX39 6@39W BX 6BX40 6@40W BX (12584.1) 6BX50 6@50W BX	EMR REMOTE MOUNT EMERGENCY (27" SIZE ONLY) FUS FUSED	
			ND NO DIFFUSER	6BX55 6@55W BX 9BX39 9@39W BX 9BX40 9@40W BX (13083.0) 9BX50 9@50W BX 9BX55 9@55W BX	43"	ULD UL DAMP LABEL TRC TRIPLE CIRCUIT		
	P1AC PENDANT WITH 3 VERTICAL STEMS 	34	RL WHITE RECESSED ACRYLIC LENS	RD WHITE RECESSED ACRYLIC DOME	34" 6BX39 6@39W BX 6BX40 6@40W BX (12584.1) 6BX50 6@50W BX	120 277 347	18 22	EMR REMOTE MOUNT EMERGENCY (27" SIZE ONLY) FUS FUSED
			RD WHITE RECESSED ACRYLIC DOME					
	P1EC PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO CANOPY 	43	ND NO DIFFUSER	34" 6BX39 6@39W BX 6BX40 6@40W BX (12584.1) 6BX50 6@50W BX	120 277 347	18 22	EMR REMOTE MOUNT EMERGENCY (27" SIZE ONLY) FUS FUSED	
								6BX55 6@55W BX 9BX39 9@39W BX 9BX40 9@40W BX (13083.0) 9BX50 9@50W BX 9BX55 9@55W BX
	P1EE PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO MID-POINT COLLECTOR AND A SINGLE CENTER STEM FROM COLLECTOR TO CANOPY 	43	ND NO DIFFUSER	34" 6BX39 6@39W BX 6BX40 6@40W BX (12584.1) 6BX50 6@50W BX	120 277 347	18 22	EMR REMOTE MOUNT EMERGENCY (27" SIZE ONLY) FUS FUSED	
								6BX55 6@55W BX 9BX39 9@39W BX 9BX40 9@40W BX (13083.0) 9BX50 9@50W BX 9BX55 9@55W BX

☑ SPECIFY CATALOG CODE

SAMPLE CODE: DS1-P1EE-34-BD-SMP-6BX39-120-22-DMA

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy (standard on all hanging systems, except "P1AC" & "P1EC").
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Fixture features a high performance reflector made of MIRO® 4 aluminum, which is 95% reflective (only available for biax lamps).

- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.