




ENVY™ PENDANT



FIXTURE WEIGHT 13 LBS



FIXTURE WEIGHT 26 LBS




FIXTURE WEIGHT 39 LBS




EV1-P1EE-34-BD-GRP




EV1-P1AC-34-BL-AWP/PAL



FIXTURE WEIGHT 13 LBS



FIXTURE WEIGHT 26 LBS








FIXTURE WEIGHT 39 LBS



FEATURES

- The Envy series features OCL's new indirect performance reflector system to optimize horizontal distribution of light and to maximize luminaire efficiency. Refer to page 28 for additional information.
- Contemporary, low-profile trim is spun from 0.080" thick, non-ferrous aluminum sheet.
- Fixture is specially suited for close-to-ceiling applications where high performance and low glare are necessary.
- Several interchangeable diffuser options available.
- Acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 EV1	<b>P1AA</b> PENDANT WITH A SINGLE CENTER STEM 	27	<b>BL</b> ACRYLIC BOTTOM LENS WITH GREEN TINTED EDGE	<b>BAL</b> BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	<b>27"</b> <b>3BX27</b> 3@27W BX <b>3BX39</b> 3@39W BX (13072.0)	120 277 347	18	<b>DMA</b> ADVANCE® DIMMING BALLAST <b>DML</b> LUTRON® DIMMING BALLAST <b>EMI</b> INTEGRAL EMERGENCY (34"/43" SIZES ONLY) <b>EMR</b> REMOTE MOUNT EMERGENCY (27" SIZE ONLY) <b>FUS</b> FUSED
			<b>BD</b> WHITE BOTTOM ACRYLIC DOME	<b>4TT42</b> 4@42W TT				
			<b>P1AC</b> PENDANT WITH 3 VERTICAL STEMS 	34	<b>RL</b> WHITE RECESSED ACRYLIC LENS	<b>34"</b> <b>6BX39</b> 6@39W BX		22
					<b>RD</b> WHITE RECESSED ACRYLIC DOME	<b>6BX40</b> 6@40W BX (12584.1) <b>6BX50</b> 6@50W BX		
					<b>P1EC</b> PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO CANOPY 	43		
			<b>P1EE</b> PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO MID-POINT COLLECTOR AND A SINGLE CENTER STEM FROM COLLECTOR TO CANOPY 	43				<b>ND</b> NO DIFFUSER
	<b>ND</b> NO DIFFUSER							


↓ SPECIFY CATALOG CODE

SAMPLE CODE: EV1-P1AC-34-BL-AWP/PAL-6BX39-120-22-FUS


↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy (standard on all hanging systems, except "P1AC" & "P1EC").
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Fixture features a high performance reflector made of MIRO® 4 aluminum, which is 95% reflective (only available for biax lamps).

- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

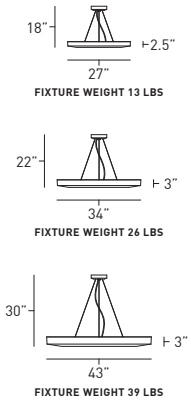

EV1-P1EC-34-ND-BKP

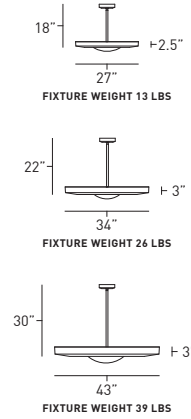






EV1-P1AA-34-RD-BAL



FEATURES

- The Envy series features OCL's new indirect performance reflector system to optimize horizontal distribution of light and to maximize luminaire efficiency. Refer to page 28 for additional information.
- Contemporary, low-profile trim is spun from 0.080" thick, non-ferrous aluminum sheet.
- Fixture is specially suited for close-to-ceiling applications where high performance and low glare are necessary.
- Several interchangeable diffuser options available.
- Acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>EV1</p>	<b>P1AA</b> PENDANT WITH A SINGLE CENTER STEM 	27	<b>BL</b> ACRYLIC BOTTOM LENS WITH GREEN TINTED EDGE	<b>BAL</b> BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	<b>27"</b> <b>3BX27</b> 3@27W BX <b>3BX39</b> 3@39W BX (13072.0)	<b>120</b> <b>277</b> <b>347</b>	18	<b>DMA</b> ADVANCE® DIMMING BALLAST <b>DML</b> LUTRON® DIMMING BALLAST
			<b>BD</b> WHITE BOTTOM ACRYLIC DOME	<b>4TT42</b> 4@42W TT	22	<b>EMI</b> INTEGRAL EMERGENCY (34"/43" SIZES ONLY) <b>EMR</b> REMOTE MOUNT EMERGENCY (27" SIZE ONLY)		
	<b>P1AC</b> PENDANT WITH 3 VERTICAL STEMS 	34	<b>RL</b> WHITE RECESSED ACRYLIC LENS	<b>6BX39</b> 6@39W BX <b>6BX40</b> 6@40W BX (12584.1) <b>6BX50</b> 6@50W BX		30	<b>FUS</b> FUSED <b>ULD</b> UL DAMP LABEL <b>TRC</b> TRIPLE CIRCUIT	
			<b>RD</b> WHITE RECESSED ACRYLIC DOME	<b>6BX55</b> 6@55W BX <b>9BX39</b> 9@39W BX <b>9BX40</b> 9@40W BX (13083.0) <b>9BX50</b> 9@50W BX <b>9BX55</b> 9@55W BX				
	<b>P1EC</b> PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO CANOPY 	43	<b>ND</b> NO DIFFUSER					
							<b>P1EE</b> PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO MID-POINT COLLECTOR AND A SINGLE CENTER STEM FROM COLLECTOR TO CANOPY 	

↓ SPECIFY CATALOG CODE

SAMPLE CODE: **EV1-P1AA-34-RD-BAL-6BX39-120-22-DMA**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy (standard on all hanging systems, except "P1AC" & "P1EC").
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Fixture features a high performance reflector made of MIRO® 4 aluminum, which is 95% reflective (only available for biax lamps).

- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.