




HIGHRISE™ PENDANT




FIXTURE WEIGHT 5 LBS




FIXTURE WEIGHT 7 LBS



FIXTURE WEIGHT 9 LBS



FIXTURE WEIGHT 12 LBS

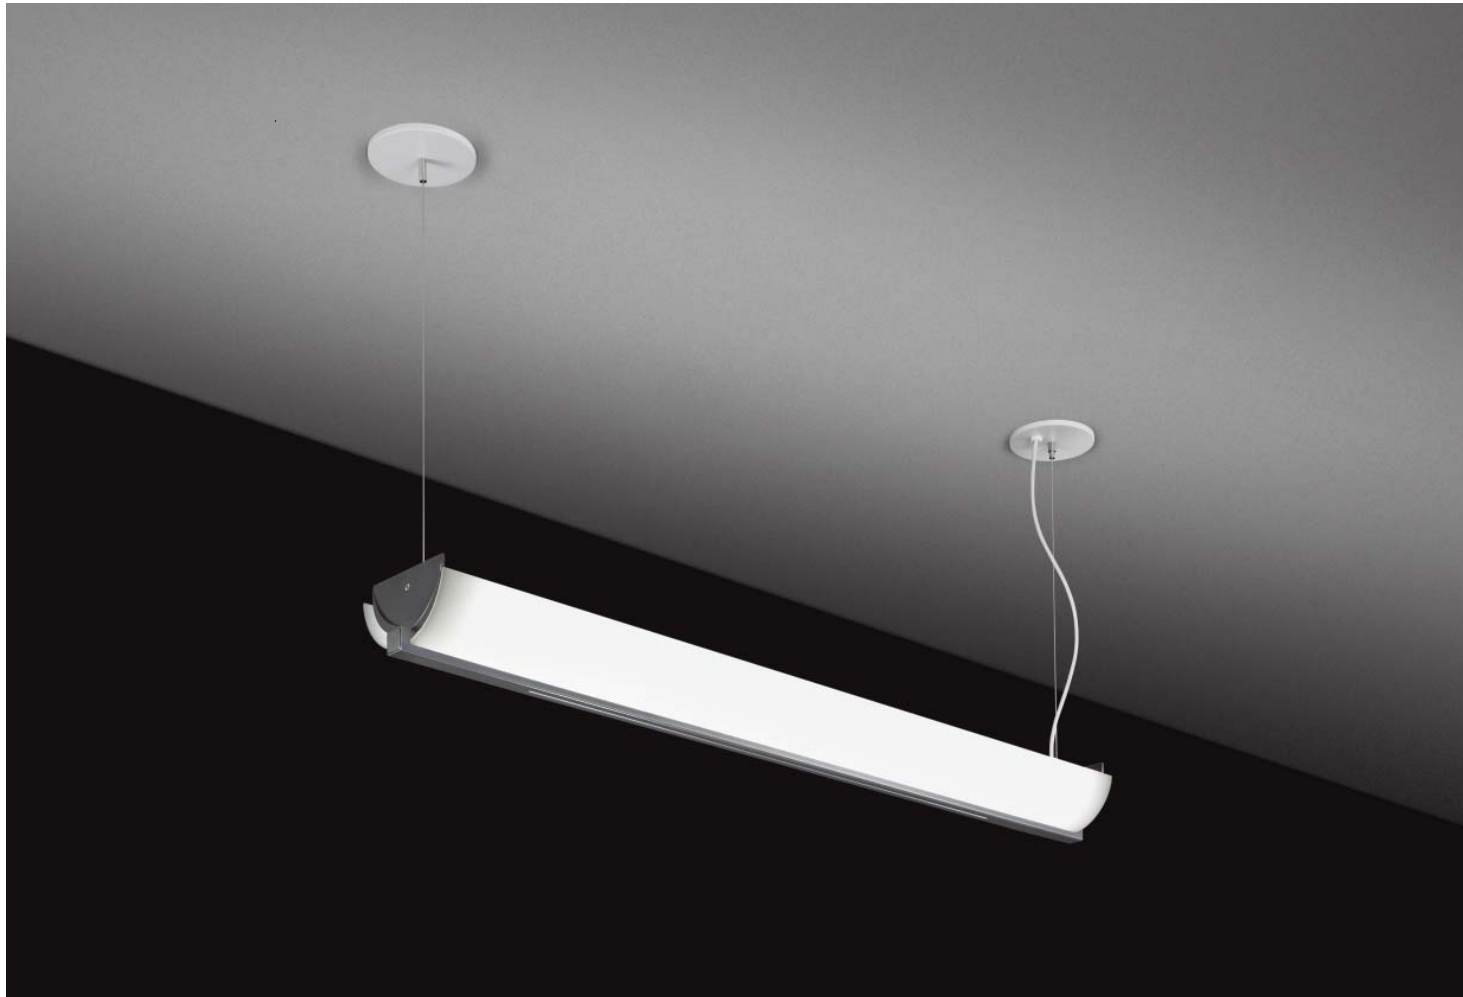

HI2-P1EB-48-GW-SGP

MATCHING FIXTURES







page 254



page 458

FEATURES

- The Highrise features solid aluminum die-cast ends with a distinctive tapering crescent design.
- 1.50" wide matte anodized, aluminum extruded back channel.
- A variety of perforations are available in the 0.080" thick aluminum face.
- 3/16" thick extruded virgin white acrylic diffuser is UV stable and UL-94 HB Flame Class rated.
- Available with perforated metal diffuser overlay.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 HI1  HI2  HI3	P1EB PENDANT WITH AN AIRCRAFT CABLE ON EACH END OF THE FIXTURE AND A POWER CORD ON ONE END 	24	GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC	PTD PAINTED – SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	24" 2LF14 2@14W T5 2LF24 2@24W T5H0 (12582.0)	120 277 347	36 36	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMR REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY) EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY) ULD UL DAMP LABEL FUS FUSED
		36			36" 2LF21 2@21W T5 2LF39 2@39W T5H0 (12589.0)	36 36	EMR REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY) EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY)	
		48			48" 2LF28 2@28W T5 2LF54 2@54W T5H0 (12583.0)	36 36	EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY)	
		60			60" 2LF35 2@35W T5 2LF80 2@80W T5H0	36 36	EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY)	

☐ SPECIFY CATALOG CODE

SAMPLE CODE: **HI2-P1EB-48-GW-SGP-2LF28-120-40-EMI**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to two standard 4" J-boxes (supplied by others). Power is only required to one J-box.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.