




FIXTURE WEIGHT 4 LBS




FIXTURE WEIGHT 5 LBS



FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS

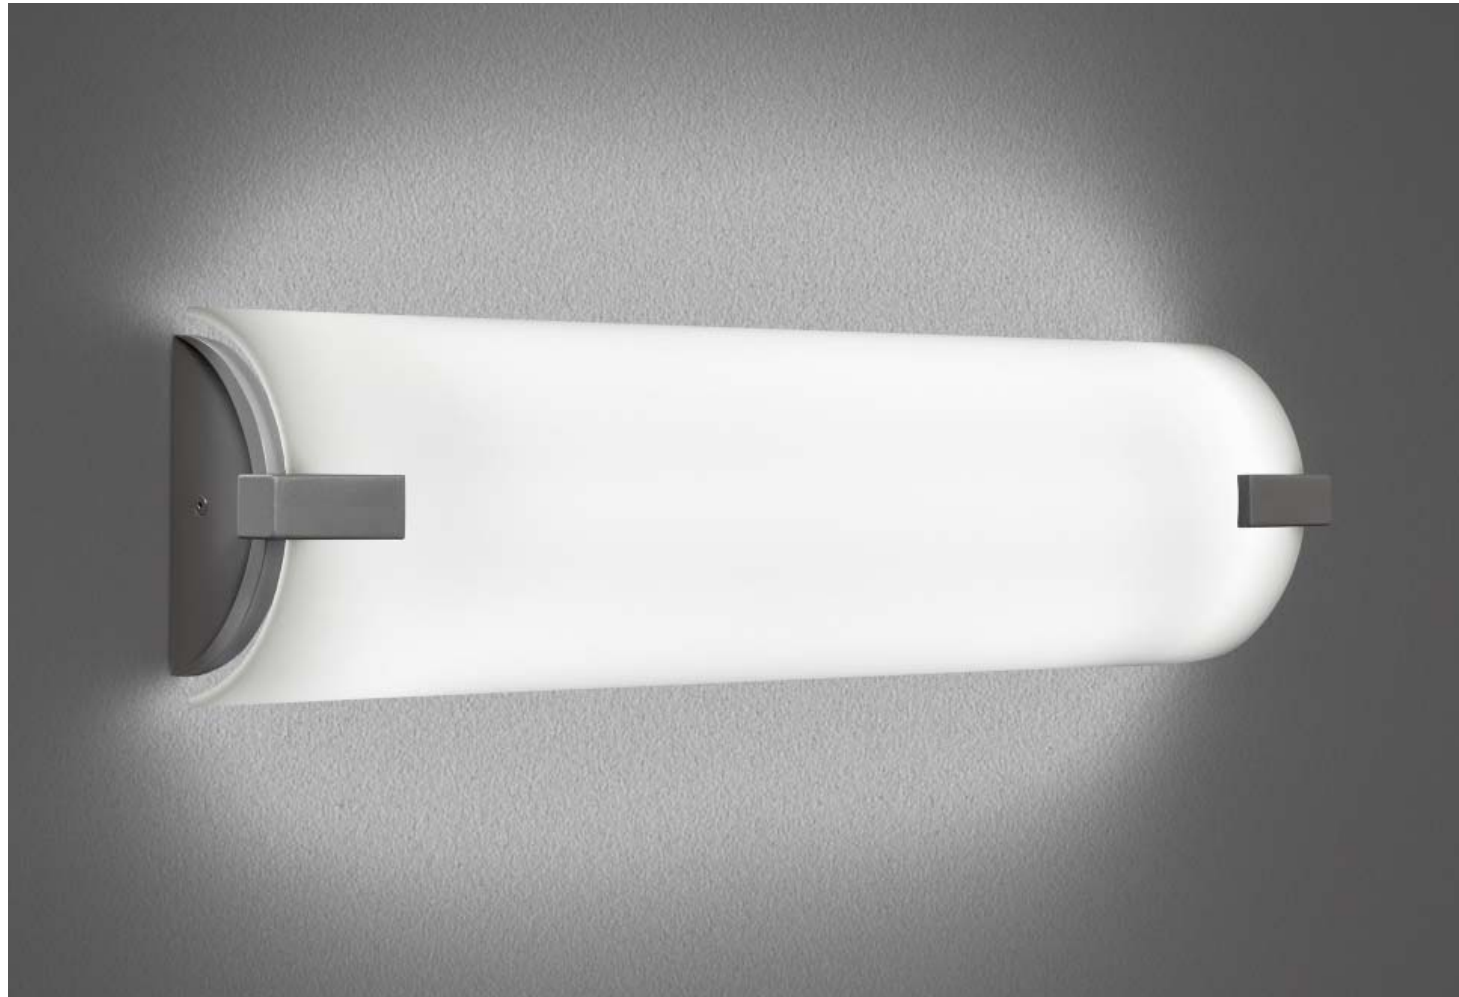







H01-S1SA-24-GW-GRP

ADA



FEATURES

- The simple, understated look of the Hilo is well suited for numerous interior applications.
- 1.50" wide matte anodized, aluminum extruded back channel.
- The Hilo features solid aluminum die-cast ends with a distinctive tapering crescent design.
- 3/16" thick extruded virgin white acrylic diffuser is UV stable and UL-94 HB Flame Class rated.
- The Hilo can be mounted vertically or horizontally and is available in a variety of lengths.
- Available with perforated diffuser overlay.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 H01	S1SA INDOOR ADA COMPLIANT SCNCE 	24	GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC	PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	24" 	120	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST
		36			2 LF14 2@14W T5 2 LF24 2@24W T5H0 (12587.0)	277	EMR REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY)
		48			36" 	347	EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY)
		60			2 LF21 2@21W T5 2 LF39 2@39W T5H0 (12590.0)		ULD UL DAMP LABEL FUS FUSED
					48" 	2 LF28 2@28W T5 2 LF54 2@54W T5H0 (12588.0)	
				60" 	2 LF35 2@35W T5 2 LF80 2@80W T5H0 (13805.0)		

☑ SPECIFY CATALOG CODE

SAMPLE CODE: **H01-S1SA-24-GW-GRP-2LF14-120-FUS**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others), and requires additional anchors.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).

- Fixture is ADA compliant.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.