




ILLUSION™ SCNCE




FIXTURE WEIGHT 4 LBS



FIXTURE WEIGHT 5 LBS




FIXTURE WEIGHT 6 LBS



FIXTURE WEIGHT 7 LBS



IL1-S1SA-24-GW-BAL

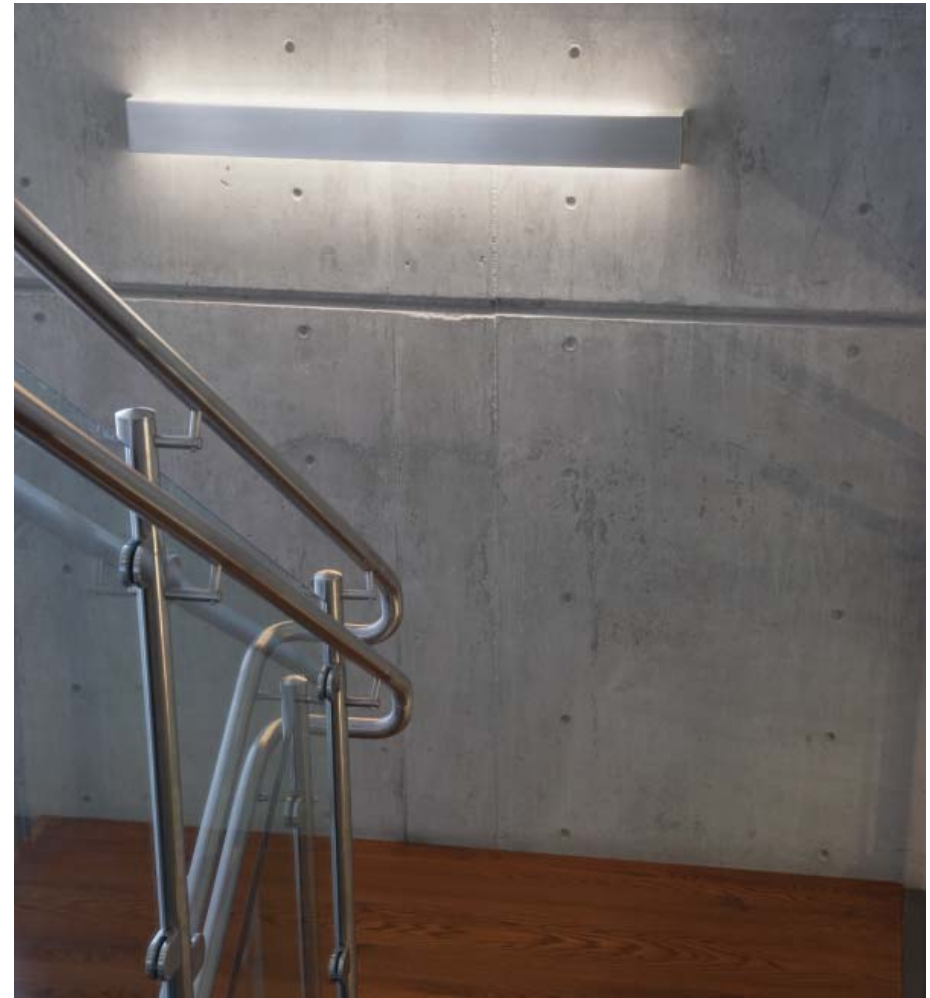


LOCATION: Heidt and Associates, Tampa, FL ARCHITECT: Curts Gaines Hall Jones Architects, Inc.



FEATURES

- The Illusion epitomizes minimalist design with its simple shape and mere 2.50" projection from the wall.
- 1.50" wide matte anodized, aluminum extruded back channel.
- 5/32" thick, extruded virgin white acrylic diffuser is UV stable and UL-94 HB Flame Class rated.
- The Illusion can be mounted vertically or horizontally.
- Consult factory for modified face designs.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>IL1</p>	<p>S1SA INDOOR ADA COMPLIANT SCNCE</p> 	<p>24</p> <p>36</p> <p>48</p> <p>60</p>	<p>GW GLOSS WHITE ACRYLIC</p>	<p>BAL BRUSHED ALUMINUM</p> <p>PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p>24" </p> <p>2LF14 2@14W T5</p> <p>2LF24 2@24W T5H0 (12881.0)</p> <p>36" </p> <p>2LF21 2@21W T5</p> <p>2LF39 2@39W T5H0 (13786.0)</p> <p>48" </p> <p>2LF28 2@28W T5</p> <p>2LF54 2@54W T5H0 (12879.0)</p> <p>60" </p> <p>2LF35 2@35W T5</p> <p>2LF80 2@80W T5H0 (13806.0)</p>	<p>120</p> <p>277</p> <p>347</p>	<p>DMA ADVANCE® DIMMING BALLAST</p> <p>DML LUTRON® DIMMING BALLAST</p> <p>EMR REMOTE MOUNT EMERGENCY (24"/36" SIZES ONLY)</p> <p>EMI INTEGRAL EMERGENCY (48"/60" SIZES ONLY)</p> <p>ULD UL DAMP LABEL</p> <p>FUS FUSED</p> <p>SJB MOUNTING COVER FOR STANDARD 4" J-BOX (SEE BELOW)</p>
<p> SPECIFY CATALOG CODE</p>							

SAMPLE CODE: IL1-S1SA-24-GW-BAL-2LF14-120-EMR

 **PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM**

- Fixture mounts to a standard 2" x 4" switch box (supplied by others), and requires additional anchors. See options section for standard 4" J-box mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).

- Fixture is ADA compliant.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



SJB
MOUNTING COVER FOR STANDARD 4" J-BOX