




INTRIGUE™ OUTDOOR SCNCE




FIXTURE WEIGHT 7 LBS



FIXTURE WEIGHT 9 LBS



FIXTURE WEIGHT 11 LBS



FIXTURE WEIGHT 13 LBS




IN1-010A-24-GW-GRP


ADA




IN2-010A-24-GW-SMP




FIXTURE WEIGHT 7 LBS



FIXTURE WEIGHT 9 LBS



FIXTURE WEIGHT 11 LBS



FIXTURE WEIGHT 13 LBS








MATCHING FIXTURES



page 264

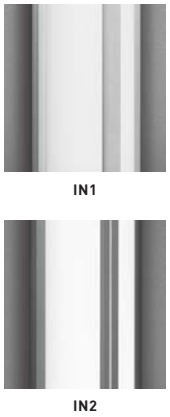FEATURES

- The Intrigue sconce features solid aluminum die-cast ends with a domed top and a distinctive tapering arch design.
- 0.125" thick, matte anodized, aluminum extruded back channel.
- Features 1.0" wide by 0.375" thick extruded aluminum front bar with optional slit cutout.
- 3/16" thick extruded virgin white acrylic is 45% DR high impact, UV stable, F1 rated, and UL-94 HB Flame Class rated.
- Intrigue can be mounted vertically or horizontally.
- Hinged front face simplifies re-lamping and maintenance.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS						
 <p>IN1</p> <p>IN2</p>	<p><b>010A</b> OUTDOOR ADA COMPLIANT SCNCE</p> 	18	<p><b>GW</b> GLOSS WHITE ACRYLIC</p>	<p>PTD PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p>18" </p> <p><b>1BX27</b> 1@27W BX</p> <p><b>1BX39</b> 1@39W BX (13796.0)</p>	<p>120</p> <p>277</p> <p>347</p>	<p><b>DMA</b> ADVANCE® DIMMING BALLAST</p> <p><b>DML</b> LUTRON® DIMMING BALLAST</p> <p><b>EMR</b> REMOTE MOUNT EMERGENCY (18" SIZE ONLY)</p> <p><b>EMI</b> INTEGRAL EMERGENCY (24"/36"/48" SIZES ONLY)</p> <p><b>FUS</b> FUSED</p>						
		24			<p>24" </p> <p><b>2LF14</b> 2@14W T5</p> <p><b>2LF24</b> 2@24W T5H0 (13797.0)</p> <p><b>1BX40</b> 1@40W BX</p> <p><b>1BX50</b> 1@50W BX</p> <p><b>1BX55</b> 1@55W BX</p>								
		36			<p>36" </p> <p><b>2LF21</b> 2@21W T5</p> <p><b>2LF39</b> 2@39W T5H0 (13798.0)</p> <p><b>2BX39</b> 2@39W BX</p>								
		48			<p>48" </p> <p><b>2LF28</b> 2@28W T5</p> <p><b>2LF54</b> 2@54W T5H0 (13799.0)</p> <p><b>2BX40</b> 2@40W BX</p> <p><b>2BX50</b> 2@50W BX</p> <p><b>2BX55</b> 2@55W BX</p>								
		<p> SPECIFY CATALOG CODE</p>											

OUTDOOR

SAMPLE CODE: IN2-010A-24-GW-SMP-2LF14-120-EMI

 PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 4" J-box (supplied by others), and requires additional anchors.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating, 0°F/ -18°C starting temperature (3-5 year ballast warranty depending on ballast specification).

- Fixture is ADA compliant.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.