


18"  
4" 6"  
FIXTURE WEIGHT 5 LBS




25"  
4" 6"  
FIXTURE WEIGHT 7 LBS




ML2-S1SA-25-GW-SGP


ADA



18"  
4" 6"  
FIXTURE WEIGHT 5 LBS



25"  
4" 6"  
FIXTURE WEIGHT 7 LBS

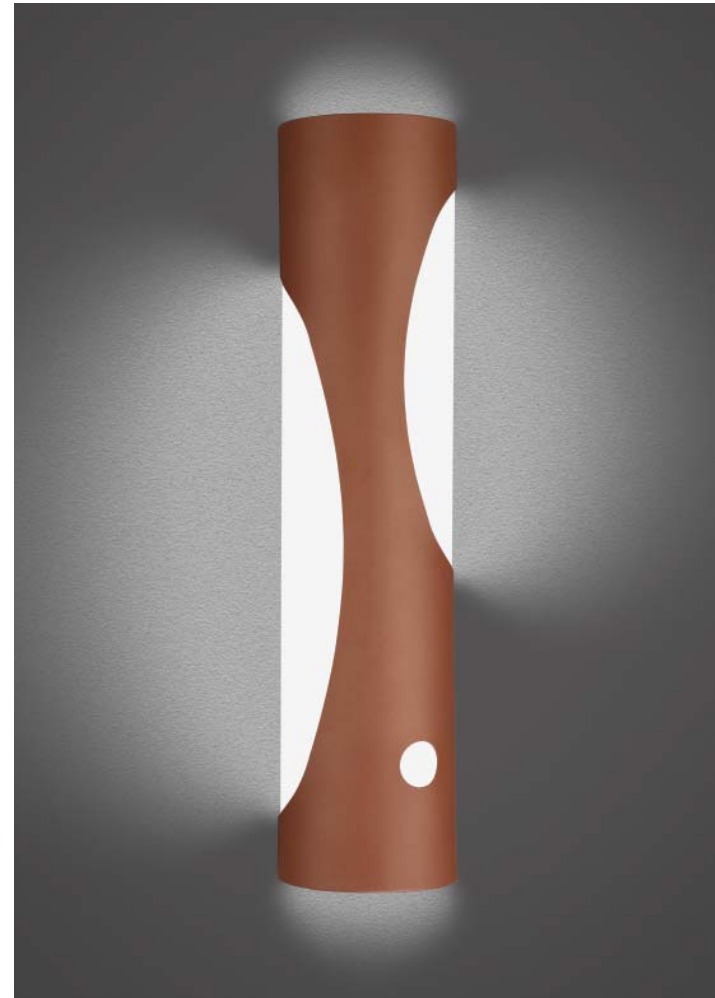

ML3-S1SA-25-GW-CMP

ADA

▾ MATCHING FIXTURES



page 390

▾ FEATURES




- The Monolith scence features a patterned metal face with a white acrylic diffuser.
- This contemporary scence features three unique face designs. Consult factory for modified or custom designs.
- Extruded virgin white acrylic is UV stable and UL-94 HB Flame Class rated.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 ML1   ML2   ML3	<b>S1SA</b> INDOOR ADA COMPLIANT SCNCE 	18	<b>GW</b> GLOSS WHITE ACRYLIC  <b>MW</b> MATTE WHITE ACRYLIC	PTD PAINTED – SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	<b>18"</b>  <b>1BX27</b> 1@27W BX  <b>1BX39</b> 1@39W BX (13778.0)	<b>120</b>  <b>277</b>  <b>347</b>	<b>DMA</b> ADVANCE® DIMMING BALLAST <b>DML</b> LUTRON® DIMMING BALLAST <b>EMR</b> REMOTE MOUNT EMERGENCY (18" SIZE ONLY) <b>EMI</b> INTEGRAL EMERGENCY (25" SIZE ONLY) <b>FUS</b> FUSED <b>ULD</b> UL DAMP LABEL <b>TLP</b> TOP LENS PRISMATIC ACRYLIC <b>BLP</b> BOTTOM LENS PRISMATIC ACRYLIC IC
		25	<b>25"</b>  <b>1LF14</b> 1@14W T5 <b>2LF14</b> 2@14W T5 <b>1LF24</b> 1@24W T5H0 <b>2LF24</b> 2@24W T5H0 (12635.0)				
<input type="button" value="SPECIFY CATALOG CODE"/>							

SAMPLE CODE: **ML3-S1SA-25-GW-CMP-1LF14-120-ULD**

 **PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM**

- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Fixture is ADA compliant.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

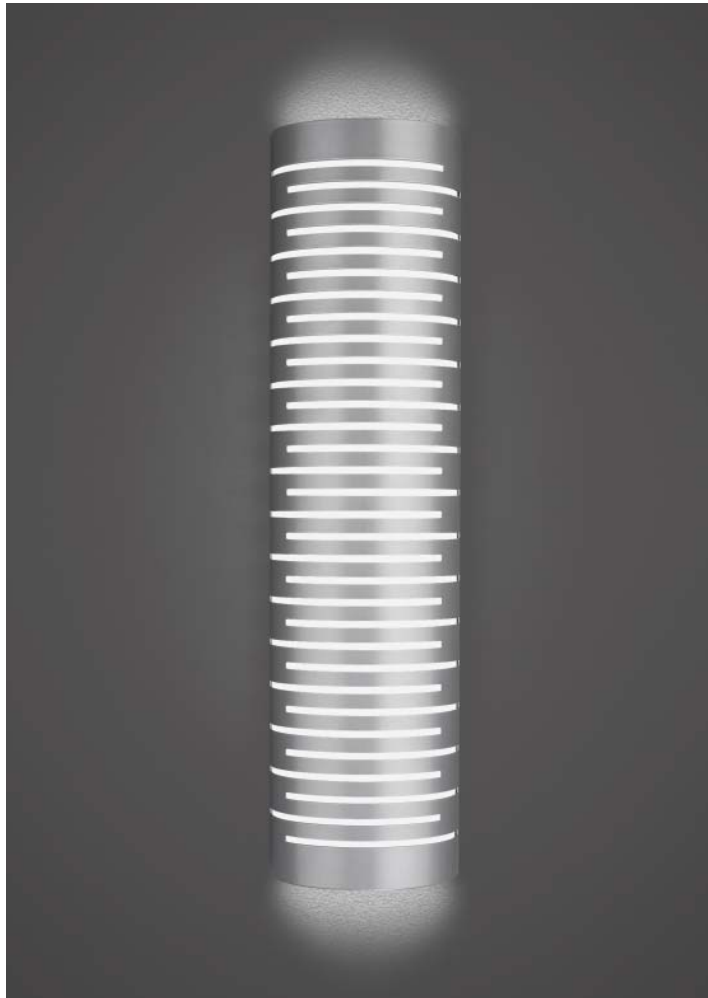

ML1-S1SA-25-GW-SMP

ADA

▾ MATCHING FIXTURES



page 390

▾ FEATURES

- The Monolith sconce features a patterned metal face with a white acrylic diffuser.
- This contemporary sconce features three unique face designs. Consult factory for modified or custom designs.
- Extruded virgin white acrylic is UV stable and UL-94 HB Flame Class rated.
- 21 standard powder coat paints offered, however all RAL colors available.
- Utilizes highly efficient, long lasting and low mercury T5 or T5HO lamps for minimal fixture maintenance and lamp disposal.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 ML1   ML2   ML3	<b>S1SA</b> INDOOR ADA COMPLIANT SCNCE 	18	<b>GW</b> GLOSS WHITE ACRYLIC  <b>MW</b> MATTE WHITE ACRYLIC	PTD PAINTED – SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	<b>18"</b>  <b>1BX27</b> 1@27W BX  <b>1BX39</b> 1@39W BX (13778.0)	<b>120</b>  <b>277</b>  <b>347</b>	<b>DMA</b> ADVANCE® DIMMING BALLAST <b>DML</b> LUTRON® DIMMING BALLAST <b>EMR</b> REMOTE MOUNT EMERGENCY (18" SIZE ONLY) <b>EMI</b> INTEGRAL EMERGENCY (25" SIZE ONLY) <b>FUS</b> FUSED <b>ULD</b> UL DAMP LABEL <b>TLP</b> TOP LENS PRISMATIC ACRYLIC <b>BLP</b> BOTTOM LENS PRISMATIC ACRYLIC IC
		25	<b>25"</b>  <b>1LF14</b> 1@14W T5 <b>2LF14</b> 2@14W T5 <b>1LF24</b> 1@24W T5H0 <b>2LF24</b> 2@24W T5H0 (12635.0)		(13778.0)       (12635.0)		
<input type="button" value="SPECIFY CATALOG CODE"/>							

SAMPLE CODE: **ML1-S1SA-25-GW-SMP-1LF14-120-ULD**

 **PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)**

- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Fixture is ADA compliant.
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.