



MOONLIGHT™ PENDANT



M01-P1EC-17-GF-BAL

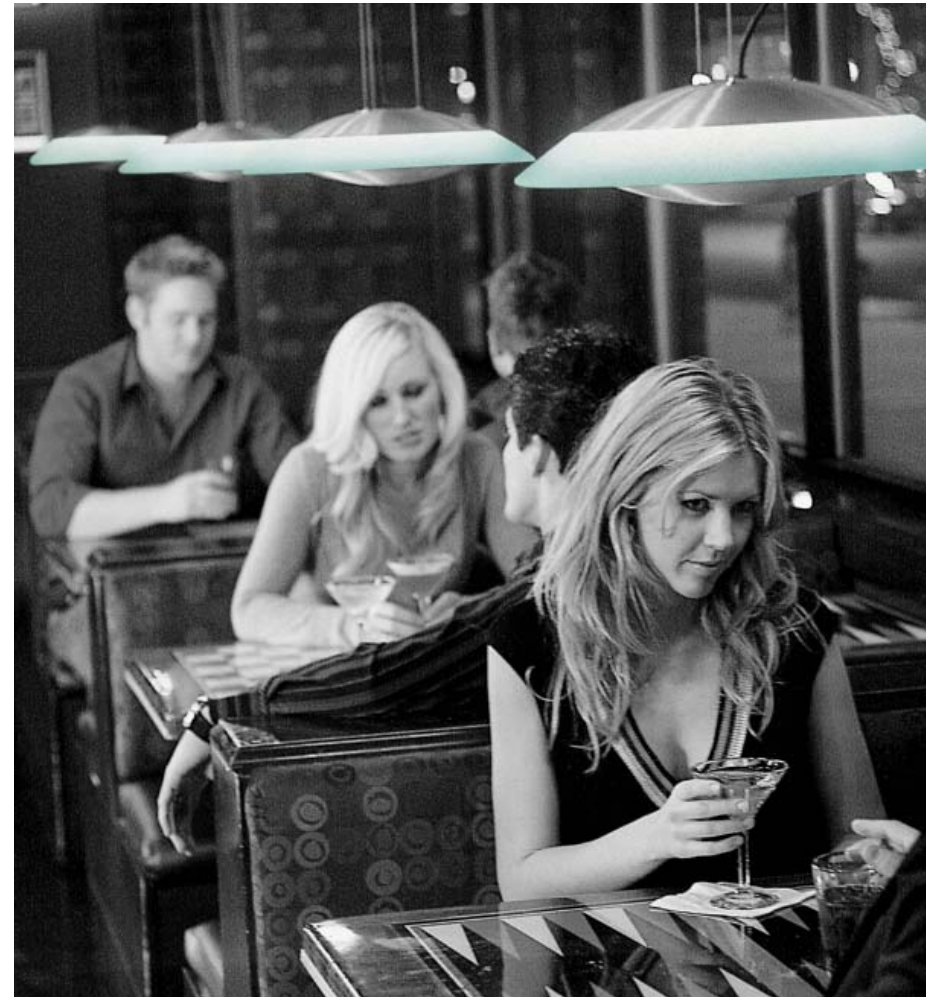

LOCATION: Halo Bar, St Louis , MO



▼ MATCHING FIXTURES



page 344

▼ FEATURES

- This contemporary pendant casts a moonlight glow from its frosted green acrylic diffuser, sandwiched between two opposing spun aluminum discs.
- The Moonlight pendant is elegantly suspended by three stainless steel aircraft cables and has a custom designed, metal braided SJT cord.
- Spun from solid, non-ferrous 0.064" thick aluminum.
- Thermally formed 30/30 green-tinted acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>M01</p>	<p>P1EC PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A POWER CORD TO CANOPY</p> 	17	<p>GF GREEN FROSTED ACRYLIC</p>	<p>BAL BRUSHED ALUMINUM</p> <p>PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p>17"</p> <p>1CL22 1@22W T5C (13026.0)</p>	<p>120</p> <p>277</p> <p>347</p>	<p>34</p>	<p>FUS FUSED</p> <p>ULD UL DAMP LABEL</p>
<p>▾ SPECIFY CATALOG CODE</p>								

SAMPLE CODE: **M01-P1EC-17-GF-BAL-1CL22-120-34-ULD**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others).
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.