



OFF BROADWAY™ PENDANT



OB1-P1AK-31-GW-ABR



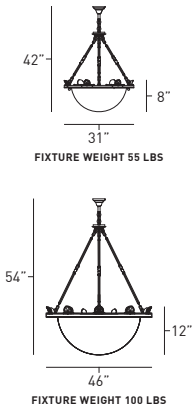

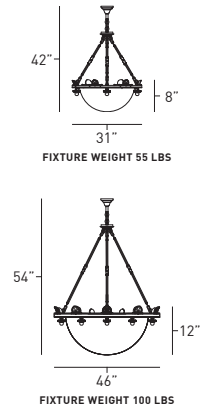OB1-P1AK-31-GW-PBR-PRL



FEATURES

- The Off Broadway uses the cast brass trim of the original Broadway pendant with the addition of a deep acrylic diffuser and cast brass pediments around its perimeter.
- Optional perimeter lamps with cast brass lamp holders are also offered.
- The optional v-style overlay and acorn style cast brass bottom finial add another level of elegance.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

| SERIES  | HANGING SYSTEM   | SIZE | DIFFUSER  | FINISH  | LAMPING (PHOTOMETRIC TEST #)  | VOLTAGE  | OAH<br>SPECIFY IN INCHES | OPTIONS  |
|---|--|------|---|---|---|--|--------------------------|--|
| <br><b>OB1</b> | <b>P1AK</b> PENDANT WITH 3 ANGLED REEDED STEMS AND A CENTER REEDED STEM TO COLLECTOR AND A SINGLE CENTER CHAIN FROM COLLECTOR TO CANOPY<br> | 31   | <b>GW</b> GLOSS WHITE ACRYLIC<br><br><b>MW</b> MATTE WHITE ACRYLIC  | <b>PTR</b> PEWTER<br><br><b>PBR</b> POLISHED BRASS<br><br><b>BBR</b> BRUSHED BRASS<br><br><b>ABR</b> ANTIQUE BRASS<br><br><b>STB</b> STATUARY BRONZE  | <b>31"</b><br><br><b>8QD26</b> 8@26W QD [12189.0]<br><br><b>4TT32</b> 4@32W TT [9530.0]<br><br><b>4BX39</b> 4@39W BX [9640.0]<br><br><b>3IN150</b> 3@150W IN [7130.0] | <b>120</b><br><br><b>277</b><br><br><b>347</b>   | <b>42</b>                | <b>DMA</b> ADVANCE® DIMMING BALLAST<br><br><b>DML</b> LUTRON® DIMMING BALLAST<br><br><b>EMI</b> INTEGRAL EMERGENCY<br><br><b>FUS</b> FUSED |
|   |  | 46   | <b>SNK</b> SATIN NICKEL<br><br><b>ORB</b> OIL RUBBED BRONZE<br><br><b>PTD</b> PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS) | <b>46"</b><br><br><b>8TT42</b> 8@42W TT [13749.0]<br><br><b>6BX40</b> 6@40W BX<br><br><b>6BX50</b> 6@50W BX [9531.0]<br><br><b>6BX55</b> 6@55W BX<br><br><b>8BX39</b> 8@39W BX [12187.0]<br><br><b>6IN150</b> 6@150W IN [13743.0] | <b>54</b>   | <b>TLP</b> TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)<br><br><b>ULD</b> UL DAMP LABEL<br><br><b>TRC</b> TRIPLE CIRCUIT<br><br><b>BFL</b> BOTTOM FINIAL (SEE BELOW)<br><br><b>VOL</b> "V" STYLE OVERLAY AND BOTTOM FINIAL<br><br><b>OOL</b> "O" STYLE OVERLAY AND BOTTOM FINIAL<br><br><b>PRL</b> PERIMETER LAMPS |                          |  |
| NOTE: PERIMETER LAMPS 7W S11 ONLY   |  |      |   |   |   |  |                          |  |
| SPECIFY CATALOG CODE  |  |      |   |   |   |  |                          |  |

PENDANT

SAMPLE CODE: **OB1-P1AK-31-GW-PBR-4TT32-120-40-PRL**

PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture requires structural mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- Bottom finial option increases overall height by length of the finial.

- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- Par down light option available in combination with a variety of compact fluorescent reflectors.
- For metal halide lamping contact factory.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



**BFL**  
BOTTOM FINIAL