



PHOENIX™ PENDANT



PH1-P2AB-27-GW-BNP

MATCHING FIXTURES



page 218






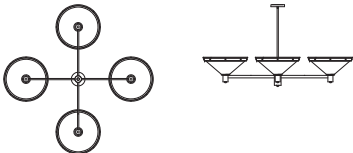
page 368



page 424

FEATURES

- The sturdy trim ring of the Phoenix is accented by solid turned metal half spheres.
- The Phoenix features a tapered cone-shaped diffuser and a stepped, bottom accent finial.
- Spun from solid, non-ferrous 0.040" thick brass or 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>PH1</p>	<p>P2AB DOUBLE CLUSTER PENDANT WITH A SINGLE CENTER STEM AND A LARGER DIAMETER NON-TAPERED BOTTOM SECTION</p> 	17	<p>GW GLOSS WHITE ACRYLIC</p> <p>MW MATTE WHITE ACRYLIC</p>	<p>PAL POLISHED ALUMINUM</p> <p>BAL BRUSHED ALUMINUM</p> <p>PTR PEWTER</p> <p>PBR POLISHED BRASS</p>	<p>17"</p> <p>4QD26 4@26W QD (10989.0)</p> <p>2IN100 2@100W IN (7135.0)</p>	120	48	<p>DMA ADVANCE® DIMMING BALLAST</p> <p>DML LUTRON® DIMMING BALLAST</p>
	<p>P3AB TRIPLE CLUSTER PENDANT WITH A SINGLE CENTER STEM AND A LARGER DIAMETER NON-TAPERED BOTTOM SECTION</p> 	27		<p>STB STATUARY BRONZE</p> <p>SNK SATIN NICKEL</p> <p>ORB OIL RUBBED BRONZE</p> <p>PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p>27"</p> <p>4TT32 4@32W TT (9529.0)</p> <p>4TT42 4@42W TT</p> <p>4BX39 4@39W BX (8222.1)</p> <p>3IN150 3@150W IN (13742.0)</p>		48	<p>EMI INTEGRAL EMERGENCY</p> <p>FUS FUSED</p> <p>TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)</p> <p>ULD UL DAMP LABEL</p>
	<p>P4AB QUAD CLUSTER PENDANT WITH A SINGLE CENTER STEM AND A LARGER DIAMETER NON-TAPERED BOTTOM SECTION</p> 			<p>NOTE: ON ALL BRASS AND PLATED FINISHES, CLUSTER ARMS WILL BE POWDER COAT PAINTED.</p>	<p>NOTE: LAMPING LISTED IS PER BOWL.</p>			
<p>↓ SPECIFY CATALOG CODE</p>								

PENDANT

SAMPLE CODE: PH1-P2AB-27-GW-BNP-4QD26-120-48-FUS

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture requires structural mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- If sloped-ceiling adapter is required, consult factory for details.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.