

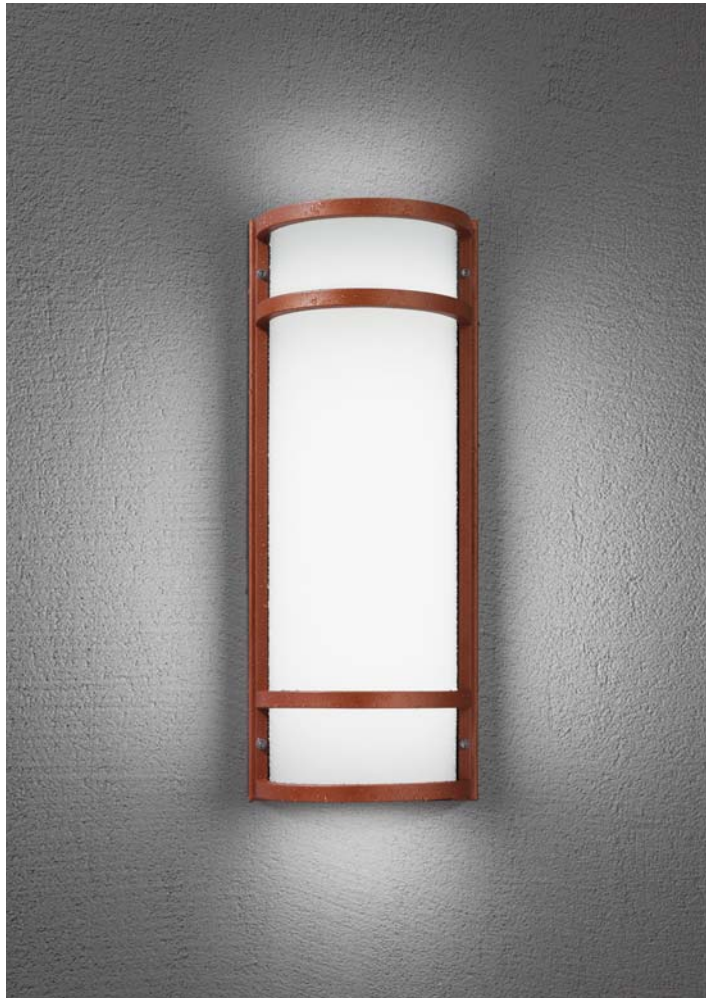


REGENCY™ OUTDOOR SCNCE



RG1-010B-18-GW-CMP



RG2-010B-18-GW-SMP






▾ MATCHING FIXTURES



page 272

▾ FEATURES

- The Regency sconce is a robust and stylish wall fixture constructed from solid aluminum or brass bar stock.
- Consult factory for modified sizes and bar configurations.
- Back box is formed from 0.080" thick aluminum.
- F1 rated, fully-enclosed acrylic diffuser.
- Virgin white acrylic is UV stable and UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective marine clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>R61</p>  <p>R62</p>  <p>R63</p>  <p>R64</p>	<p><b>010B</b> OUTDOOR SCNCE</p> 	<p><b>18</b></p>	<p><b>GW</b> GLOSS WHITE ACRYLIC</p>	<p>PTD PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p><b>18"</b></p> <p><b>20D13</b> 2@13W QD</p> <p><b>20D26</b> 2@26W QD [12339.0]</p> <p><b>1BX27</b> 1@27W BX</p> <p><b>1BX39</b> 1@39W BX</p> <p><b>2IN60</b> 2@60W IN [13783.0]</p>	<p><b>120</b></p> <p><b>277</b></p> <p><b>347</b></p>	<p><b>DMA</b> ADVANCE® DIMMING BALLAST</p> <p><b>DML</b> LUTRON® DIMMING BALLAST</p> <p><b>EMR</b> REMOTE MOUNT EMERGENCY</p> <p><b>FUS</b> FUSED</p>
<p>▾ SPECIFY CATALOG CODE</p>							


SAMPLE CODE: **R62-010B-18-GW-SMP-1BX27-120-DMA**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM


- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating, 0°F/ -18°C starting temperature (3-5 year ballast warranty depending on ballast specification).
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

OUTDOOR

REGENCY™ OUTDOOR SCONCE



RG3-010B-18-GW-SGP



RG4-010B-18-GW-BEP





▾ MATCHING FIXTURES



page 272

▾ FEATURES

- The Regency sconce is a robust and stylish wall fixture constructed from solid aluminum or brass bar stock.
- Consult factory for modified sizes and bar configurations.
- Back box is formed from 0.080" thick aluminum.
- F1 rated, fully-enclosed acrylic diffuser.
- Virgin white acrylic is UV stable and UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective marine clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 <p>R61</p>  <p>R62</p>  <p>R63</p>  <p>R64</p>	<p><b>010B</b> OUTDOOR SCNCE</p> 	<p><b>18</b></p>	<p><b>GW</b> GLOSS WHITE ACRYLIC</p>	<p>PTD PAINTED – SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p><b>18"</b></p> <p><b>2QD13</b> 2@13W QD</p> <p><b>2QD26</b> 2@26W QD [12339.0]</p> <p><b>1BX27</b> 1@27W BX</p> <p><b>1BX39</b> 1@39W BX</p> <p><b>2IN60</b> 2@60W IN [13783.0]</p>	<p><b>120</b></p> <p><b>277</b></p> <p><b>347</b></p>	<p><b>DMA</b> ADVANCE® DIMMING BALLAST</p> <p><b>DML</b> LUTRON® DIMMING BALLAST</p> <p><b>EMR</b> REMOTE MOUNT EMERGENCY</p> <p><b>FUS</b> FUSED</p>
<p>▾ SPECIFY CATALOG CODE</p>							

SAMPLE CODE: **R64-010B-18-GW-BEP-1BX27-120-FUS**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating, 0°F/ -18°C starting temperature (3-5 year ballast warranty depending on ballast specification).
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

OUTDOOR