



## SATURN™ PENDANT



SN1-P4AE-27-GW-SWP/PAL

### MATCHING FIXTURES



page 64



page 338






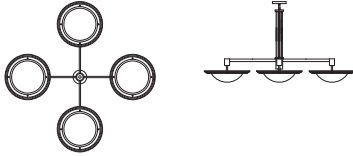
page 448



page 490

### FEATURES

- Inspired by the concentric rings of the planet Saturn, this low-profile, stepped trim ring cradles a shallow diffuser.
- A transitional design makes it ideal for both contemporary and traditional applications.
- Spun from solid, non-ferrous 0.040" thick brass, 0.040" thick copper, or 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS
 <p>SN1</p>	<p><b>P2AE</b> DOUBLE CLUSTER PENDANT WITH 4 VERTICAL STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM CLUSTER BODY TO CANOPY</p> 	18	<p><b>GW</b> GLOSS WHITE ACRYLIC</p>	<p><b>PAL</b> POLISHED ALUMINUM</p>	<p><b>18"</b></p>	120	48	<p><b>DMA</b> ADVANCE® DIMMING BALLAST</p> <p><b>DML</b> LUTRON® DIMMING BALLAST</p> <p><b>EMI</b> INTEGRAL EMERGENCY</p> <p><b>FUS</b> FUSED</p> <p><b>TLP</b> TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)</p> <p><b>CIB</b> CLEAR INNER BOWL</p> <p><b>ULD</b> UL DAMP LABEL</p> <p><b>BFL</b> BOTTOM FINIAL (SEE BELOW)</p>
			<p><b>MW</b> MATTE WHITE ACRYLIC</p>	<p><b>BAL</b> BRUSHED ALUMINUM</p>				
		27	<p><b>FA</b> FAUX ALABASTER ACRYLIC</p>	<p><b>PTR</b> PEWTER</p>	<p><b>2IN100</b> 2@100W IN (7135.0)</p>	347		
			<p><b>NH</b> NATURAL HORN ACRYLIC</p>	<p><b>PBR</b> POLISHED BRASS</p>	<p><b>27"</b></p>			
		<p><b>P3AE</b> TRIPLE CLUSTER PENDANT WITH 4 VERTICAL STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM CLUSTER BODY TO CANOPY</p> 	<p><b>ET</b> ETRUSCAN ACRYLIC</p>	<p><b>BBR</b> BRUSHED BRASS</p>	<p><b>40D26</b> 4@26W QD (10989.0)</p>			
			<p><b>WS</b> WHITE SWIRL ACRYLIC</p>	<p><b>ABR</b> ANTIQUE BRASS</p>	<p><b>4TT32</b> 4@32W TT (9530.0)</p>			
	<p><b>PTD</b> PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>		<p><b>STB</b> STATUARY BRONZE</p>	<p><b>3IN100</b> 3@100W IN (7130.1)</p>				
	<p><b>ORB</b> OIL RUBBED BRONZE</p>							
	<p><b>P4AE</b> QUAD CLUSTER PENDANT WITH 4 VERTICAL STEMS TO COLLECTOR AND A SINGLE CENTER STEM FROM CLUSTER BODY TO CANOPY</p> 							
	<p><b>NOTE:</b> ON ALL BRASS AND PLATED FINISHES, CLUSTER ARMS WILL BE POWDER COAT PAINTED.</p>					<p><b>NOTE:</b> LAMPING LISTED IS PER BOWL.</p>		
<p>▾ SPECIFY CATALOG CODE</p>								

PENDANT

SAMPLE CODE: SN1-P4AE-27-GW-SWP/PAL-4TT32-120-48-TLP

↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture requires structural mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- Bottom finial option increases overall height by length of the finial.

- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- If sloped-ceiling adapter is required, consult factory for details.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.



**BFL**  
BOTTOM FINIAL