




STELLAR™ PENDANT



ST1-P4GH-24-GW-PBR/BMP

MATCHING FIXTURES



page 140



page 148



page 292





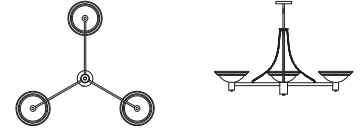
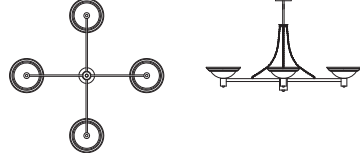
page 430



page 474

FEATURES

- The classic look of crown molding creates the stately appearance of the Stellar.
- Spun from solid, non-ferrous 0.040" thick brass, 0.040" thick copper, or 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size. Virgin white acrylic is UV stable, and all faux acrylic colors are mixed completely through to avoid noticeable fading.
- White acrylic is UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS	
 <p>ST1 (SHALLOW DIFFUSER)</p>	<p>P2GH DOUBLE CLUSTER PENDANT WITH 2 DRAPED CHAINS TO COLLECTOR AND A SINGLE CENTER STEM FROM CLUSTER BODY TO CANOPY</p> 	18	<p>GW GLOSS WHITE ACRYLIC</p> <p>MW MATTE WHITE ACRYLIC</p>	<p>PAL POLISHED ALUMINUM</p> <p>BAL BRUSHED ALUMINUM</p>	<p>18"</p> <p>4QD26 4@26W QD (10989.0)</p> <p>2IN100 2@100W IN (7135.0)</p>	120	48	<p>DMA ADVANCE® DIMMING BALLAST</p> <p>DML LUTRON® DIMMING BALLAST</p>	
	<p>P3GH TRIPLE CLUSTER PENDANT WITH 3 DRAPED CHAINS TO COLLECTOR AND A SINGLE CENTER STEM FROM CLUSTER BODY TO CANOPY</p> 	24	<p>FA FAUX ALABASTER ACRYLIC</p> <p>NH NATURAL HORN ACRYLIC</p>	<p>PBR POLISHED BRASS</p> <p>BBR BRUSHED BRASS</p> <p>ABR ANTIQUE BRASS</p> <p>STB STATUARY BRONZE</p>	<p>24"</p> <p>4TT32 4@32W TT (9530.0)</p> <p>4TT42 4@42W TT</p> <p>4BX39 4@39W BX (8222.1)</p>	277	347	48	<p>EMI INTEGRAL EMERGENCY</p> <p>FUS FUSED</p>
	<p>P4GH QUAD CLUSTER PENDANT WITH 4 DRAPED CHAINS TO COLLECTOR AND A SINGLE CENTER STEM FROM CLUSTER BODY TO CANOPY</p> 	31	<p>ET ETRUSCAN ACRYLIC</p> <p>WS WHITE SWIRL ACRYLIC</p>	<p>SNK SATIN NICKEL</p> <p>ORB OIL RUBBED BRONZE</p> <p>PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)</p>	<p>31"</p> <p>8QD26 8@26W QD (12189.0)</p> <p>6BX40 6@40W BX</p> <p>6BX50 6@50W BX (12186.0)</p> <p>6BX55 6@55W BX</p> <p>8BX39 8@39W BX (12187.0)</p> <p>3IN150 3@150W IN (7130.0)</p>	277		48	<p>TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT)</p> <p>CIB CLEAR INNER BOWL</p> <p>ULD UL DAMP LABEL</p>
<p>↓ SPECIFY CATALOG CODE</p>									
<p>NOTE: ON ALL BRASS AND PLATED FINISHES, CLUSTER ARMS WILL BE POWDER COAT PAINTED.</p>					<p>NOTE: LAMPING LISTED IS PER BOWL.</p>				

SAMPLE CODE: **ST1-P4GH-24-GW-PBR/BMP-4TT32-120-48-DMA**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture requires structural mounting.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.
- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- If sloped-ceiling adapter is required, consult factory for details.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.

PENDANT