



VG1-S1SD-18-NA-BAL

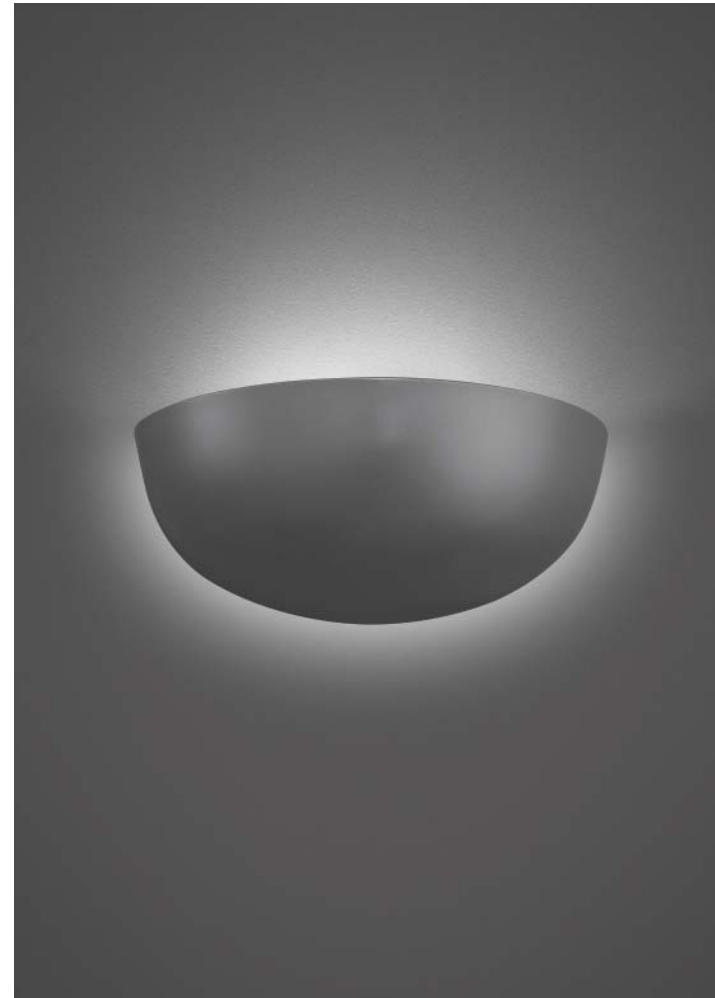

VG1-S1SB-13-NA-GRP

▼ MATCHING FIXTURES



page 38



page 42







page 350



page 408

▼ FEATURES

- The shallow metal dome of the Vogue sconce conceals the light source to create a glare-free, radial glow on the wall surface.
- The gentle, round shape is well suited for a number of interior applications.
- Spun from solid, non-ferrous 0.064" thick aluminum.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OPTIONS
 V61	<b>S1SD</b> FULL FLUSH SCNCE 	18	<b>NA</b> NONE AVAILABLE	<b>PAL</b> POLISHED ALUMINUM <b>BAL</b> BRUSHED ALUMINUM <b>PTR</b> PEWTER <b>PBR</b> POLISHED BRASS <b>BBR</b> BRUSHED BRASS <b>ABR</b> ANTIQUE BRASS <b>STB</b> STATUARY BRONZE <b>SNK</b> SATIN NICKEL <b>ORB</b> OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	<b>18"</b> <b>2QD26</b> 2@26W QD (13810.0) <b>3IN100</b> 3@100W IN	<b>120</b> <b>277</b> <b>347</b>	<b>DMA</b> ADVANCE® DIMMING BALLAST <b>DML</b> LUTRON® DIMMING BALLAST <b>EMR</b> REMOTE MOUNT EMERGENCY <b>FUS</b> FUSED <b>ULD</b> UL DAMP LABEL
		23			<b>23"</b> <b>4QD26</b> 4@26W QD <b>4TT32</b> 4@32W TT <b>3IN150</b> 3@150W IN	(Options for 23" size are listed in the adjacent column)	
 V61	<b>S1SB</b> INDOOR SCNCE 	13	<b>NA</b> NONE AVAILABLE	<b>PAL</b> POLISHED ALUMINUM <b>BAL</b> BRUSHED ALUMINUM <b>PTR</b> PEWTER <b>PBR</b> POLISHED BRASS <b>BBR</b> BRUSHED BRASS <b>ABR</b> ANTIQUE BRASS <b>STB</b> STATUARY BRONZE <b>SNK</b> SATIN NICKEL <b>ORB</b> OIL RUBBED BRONZE PTD PAINTED - SPECIFY CODE (EX. <b>BKP</b> FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	<b>13"</b> <b>2QD13</b> 2@13W QD (13811.0) <b>2IN40</b> 2@40W IN	<b>120</b> <b>277</b> <b>347</b>	<b>EMR</b> REMOTE MOUNT EMERGENCY <b>FUS</b> FUSED <b>ULD</b> UL DAMP LABEL

☑ SPECIFY CATALOG CODE

SAMPLE CODE: **V61-S1SB-13-NA-GRP-2QD13-120-FUS**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT [WWW.OCL.COM](http://WWW.OCL.COM)

- Fixture mounts to a standard 4" J-box (supplied by others).
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- For photometric data, please visit [www.ocl.com](http://www.ocl.com).
- For lamp and base information, see pages 496-505 in the reference section.
- For specific mounting instructions, please contact factory.
- Five year product warranty.