



VOYAGER™ PENDANT



VY1-P1AB-26-GW-SWP/PAL

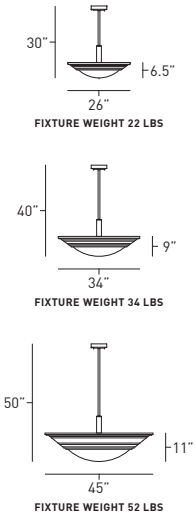

VY1-P1ED-26-GW-GRP/PAL

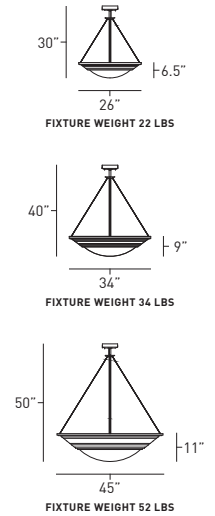




MATCHING FIXTURES



page 192

FEATURES

- An ultra-shallow diffuser seamlessly completes the form of the simple spun aluminum trim.
- The design is further accented with the concentric ribs in the trim.
- Spun from solid, non-ferrous 0.064" thick aluminum.
- Thermally formed acrylic ranges from 3/16" to 1/4" thick, depending on size.
- Virgin white acrylic is UV stable and UL-94 HB Flame Class rated.
- OCL metal finishes are applied by hand and receive a protective clear coat lacquer.
- 21 standard powder coat paints offered, however all RAL colors available.
- Fixture offered with a variety of compact fluorescent and incandescent optic packages.
- Contact factory for additional modifications or options.

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LAMPING (PHOTOMETRIC TEST #)	VOLTAGE	OAH SPECIFY IN INCHES	OPTIONS														
 VY1	P1AB PENDANT WITH A SINGLE CENTER STEM AND A LARGER DIAMETER NON-TAPERED BOTTOM SECTION 	26	GW GLOSS WHITE ACRYLIC MW MATTE WHITE ACRYLIC	PAL POLISHED ALUMINUM BAL BRUSHED ALUMINUM PTD PAINTED - SPECIFY CODE (EX. BKP FOR BLACK PAINT, SEE PAGE 492 FOR PAINT OPTIONS)	26" 80D26 8@26W QD (11091.0) 4BX39 4@39W BX (11095.0) 3IN150 3@150W IN (13742.0)	120 277 347	30	DMA ADVANCE® DIMMING BALLAST DML LUTRON® DIMMING BALLAST EMI INTEGRAL EMERGENCY FUS FUSED														
									P1ED PENDANT WITH 3 ANGLED AIRCRAFT CABLES TO COLLECTOR AND A SINGLE CENTER STEM FROM TRIM RING TO CANOPY 	34	8TT32 8@32W TT (13746.0) 6BX40 6@40W BX 6BX50 6@50W BX (9531.0) 6BX55 6@55W BX 8BX39 8@39W BX (12187.0) 6IN150 6@150W IN	40	TLP TOP LENS PRISMATIC ACRYLIC (ONLY ON FLUORESCENT) ULD UL DAMP LABEL TRC TRIPLE CIRCUIT									
														34	45" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0)	50						
																	34	45" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0)	50			
																				34	45" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0)	50
	34	45" 8TT42 8@42W TT (13749.0) 9BX39 9@39W BX 9BX40 9@40W BX 9BX50 9@50W BX (13747.0) 9BX55 9@55W BX 8IN150 8@150W IN (13744.0)	50																			

▾ SPECIFY CATALOG CODE

SAMPLE CODE: **VY1-P1ED-26-GW-GRP/PAL-4BX39-120-38-TLP**

↑ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM

- Fixture mounts to a standard 4" J-box (supplied by others), and features a 45-degree sloped-ceiling canopy.
- Bodine® emergency ballast available, standard with remote mounted test switch and indicator light.
- Advance® and Lutron® dimming ballasts available. Controls not included.
- Integral HPF electronic fluorescent ballast with Class A sound rating (3-5 year ballast warranty depending on ballast specification).
- Dual circuiting is standard on multi-ballast fixtures. Consult factory for details or other circuiting options.

- For photometric data, please visit www.ocl.com.
- For lamp and base information, see pages 496-505 in the reference section.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.