


Dash™

PENDANT / SCNCE

FEATURES


- SIMPLE LINEAR PROFILE CAN BE CONNECTED WITH **STRAIGHT** OR **ADJUSTABLE CONNECTORS** TO CREATE LONG CONTINUOUS RUNS
- MINIMAL 1.313" PROFILE DIAMETER
- FIXTURE IS ROTATABLE 350 DEGREES
- STRAIGHT AND ADJUSTABLE CONNECTORS AVAILABLE
- AVAILABLE IN 80+ CRI AND 90+ CRI
- 3 STEP LED BINNING



CATALOG CODES

DA1	-	B	-	C	-	MW	-	E	-	I	-	UNV	-	H	-	I	-	J
SERIES		HANGING SYSTEM		SIZE		DIFFUSER		FINISH		LIGHT SOURCE		VOLTAGE		OAH		CONTROL		OPTIONS

SPECIFY CATALOG CODE

A	B		C	D	E	
SERIES	HANGING SYSTEM		SIZE	DIFFUSER	STANDARD FINISHES	PREMIUM FINISHES
 DA1 DASH	PIEW	PENDANT WITH AN AIRCRAFT CABLE ON ONE END OF THE FIXTURE AND A POWER CORD ON THE OTHER (REMOTE DRIVER)	27	MW MATTE WHITE	POWDER COAT FINISHES	METAL FINISHES
	SISC	ARM SCONCE (REMOTE DRIVER)	39		BKP BLACK	BAL BRUSHED ALUMINUM
			51		BMP BRASS METALLIC	EVERWOODS POWDER COAT FINISHES (BODY ONLY)
			63		BNP BRONZE	
			75		BTP BLACK TEXTURED	
			XX		GRP GRAPHITE	
			GLP GOLDTASTIC	WPDP WHITE PINE		
			MWP MATTE WHITE	PNDP PINE		
			SGP STEEL GRAY	CRDP CHERRY		
			SMP SILVER METALLIC	TKDP TEAK		
			SWP SKY WHITE	WLDP WALNUT		
			WTP WHITE TEXTURED	DLDP DARK WALNUT		
					LWDP LIGHT BARNWOOD	
					DWDP DARK BARNWOOD	

F			G		H	I	J		
LIGHT SOURCE			VOLTAGE		OAH*	CONTROL		OPTIONS	
LED OUTPUT LED1 LED2	COLOR TEMP (80+ CRI)	COLOR TEMP (90+ CRI)	UNV 120-277		48	DM1 0-10V DIMMING 1% DM3 LUTRON HI-LUME ECOSYSTEM 1% (LDEI)	SCY	3.5" DIA. SMALL CANOPIES (REQUIRES PRE-INSTALLATION OF 3" MUD RING BY OTHERS; SISC ONLY)	
	27K	927K			100		PRA	4" PROJECTION OFF WALL (SISC ONLY)	
	30K	930K					ULD	DAMP LABEL	
	35K	935K			144		BIOS	BIOS SKYBLUE® OR BIOS SKLYBLUE® DYNAMIC LIGHT ENGINE**	
	40K	940K					FOR MODIFIED & CUSTOM CONFIGURATIONS***		
					NOTE: LEAVE BLANK FOR SISC		SCN	STRAIGHT CONNECTOR	
				ACN	ADJUSTABLE CONNECTOR (PIEW ONLY)				
					MOD	MODIFIED LUMINAIRE (CONTACT LOCAL REP)			

SAMPLE CODE: DA1-PIEW-51-MW-BTP-LED1/35K-UNV-48-DM1-ULD

*For Minimum OAH, see hanging systems details. PIEW will ship with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height

**Contact factory for BIOS SkyBlue® or BIOS SkyBlue® Dynamic light engine and control options.

***Please contact factory for assistance on your custom lengths or configurations.

Fixtures larger than 74.75" will be shipped in connectible segments

Fixture is provided with 5" dia. canopies finished to match fixture; Fixtures using any Everwoods finish, canopies will be MWP unless specified

MODS, NOTES, & COMMENTS

LUMENS AND WATTAGE CHART


		27"	39"	51"	63"	75"
LED1	LUMENS DELIVERED	1080	1620	2160	2700	3240
	SYSTEM WATTAGE	12	18	24	30	36
LED2	LUMENS DELIVERED	1680	2520	3360	4200	5040
	SYSTEM WATTAGE	20	30	40	50	60

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp. Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

HANGING SYSTEM

P1EW

PENDANT WITH AN AIRCRAFT CABLE ON ONE END OF THE FIXTURE AND A POWER CORD ON THE OTHER

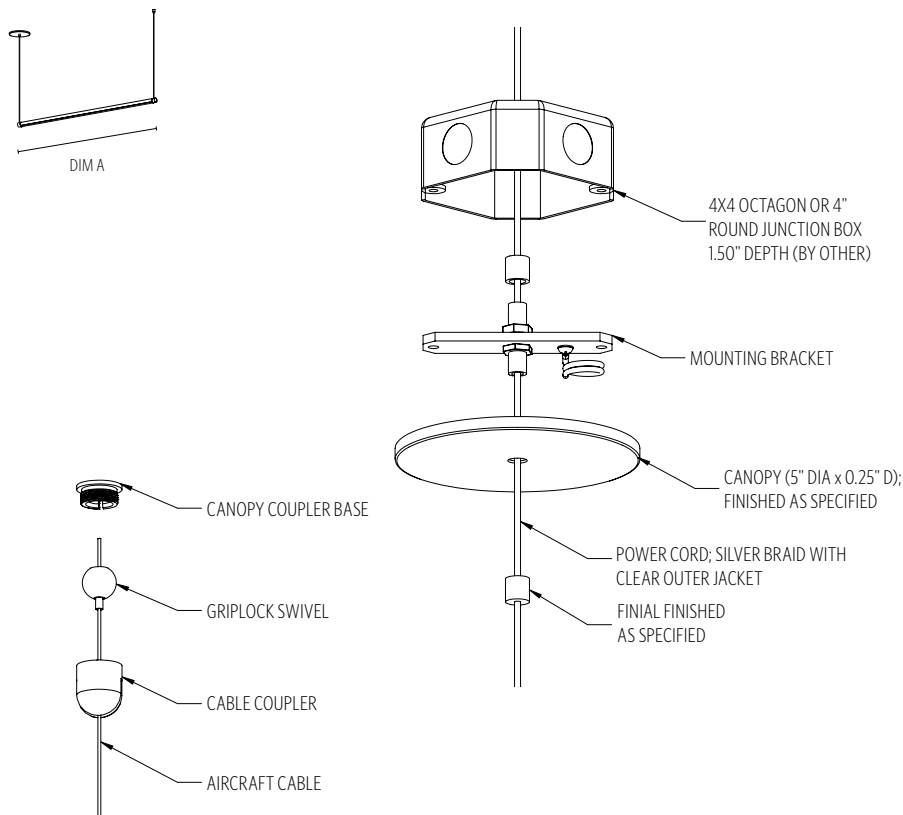


MOUNTING INFORMATION CHART

LUMINAIRE SIZE	LUMINAIRE WEIGHT	MOUNTING DISTANCE DIM A	MOUNTING POINTS	MIN/MAX OAH
26.75"	3 LBS	25.75"	2	5"/144"
38.75"	5 LBS	37.75"	2	5"/144"
50.75"	6 LBS	49.75"	2	5"/144"
62.75"	8 LBS	61.75"	2	5"/144"
74.75"	9 LBS	73.75"	2	5"/144"

P1EW ships with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height.


Fixture is provided with 5" dia. canopies finished to match fixture; Fixtures using any **Everwoods finish**, canopies will be **MWP** unless specified

P1EW will include ETL listed enclosure for remote mounting drivers. Max 30' distance from luminaire for DM1 and 10' max remote distance for DM3. Enclosure must remain accessible after installation.

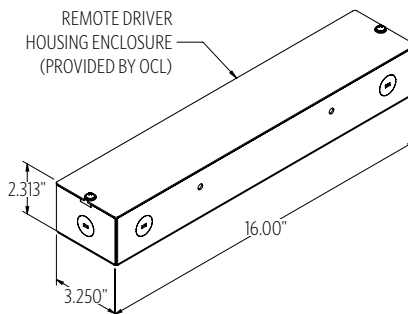

S1SC

ARM SCENCE

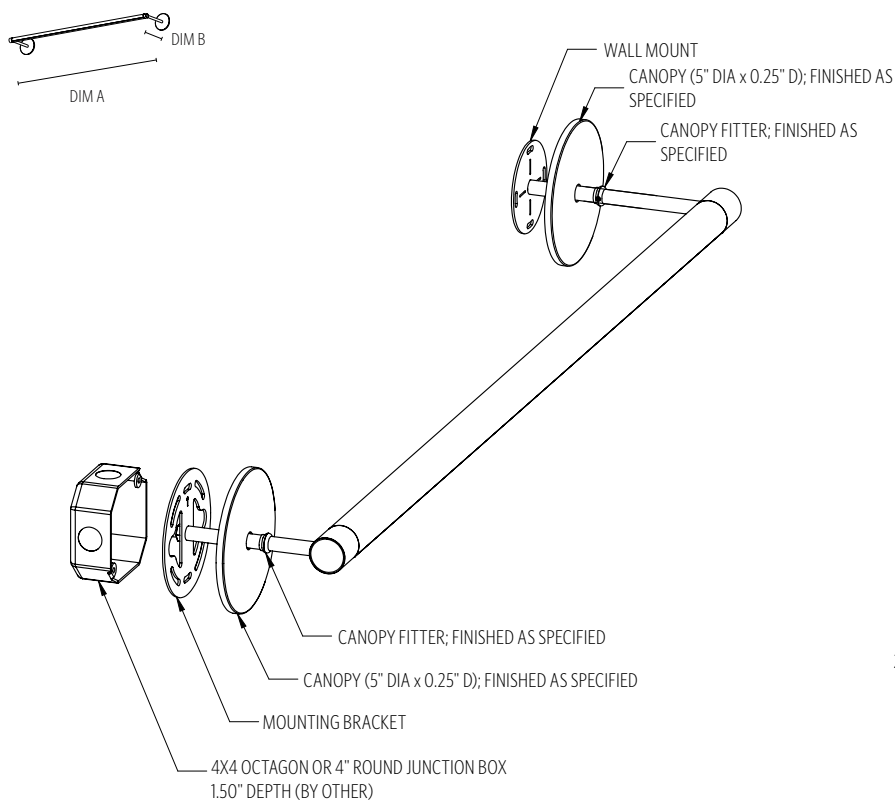


MOUNTING INFORMATION CHART


LUMINAIRE SIZE	LUMINAIRE WEIGHT	MOUNTING DISTANCE DIM A	MOUNTING DISTANCE DIM B	MOUNTING POINTS
26.75"	3 LBS	25.75"	6"	2
38.75"	5 LBS	37.75"	6"	2
50.75"	6 LBS	49.75"	6"	2
62.75"	8 LBS	61.75"	6"	2
74.75"	9 LBS	73.75"	6"	2

Fixture is provided with 5" dia. canopies finished to match fixture; Fixtures using any **Everwoods finish**, canopies will be **MWP** unless specified

S1SC will include ETL listed enclosure for remote mounting drivers. Max 30' distance from luminaire for DM1 and 10' max remote distance for DM3. Enclosure must remain accessible after installation.

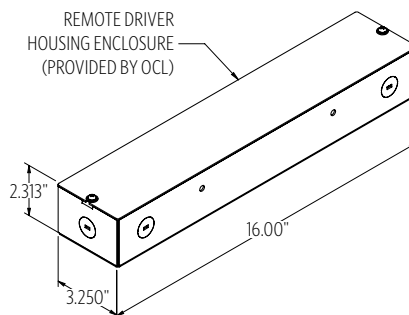

SIZES

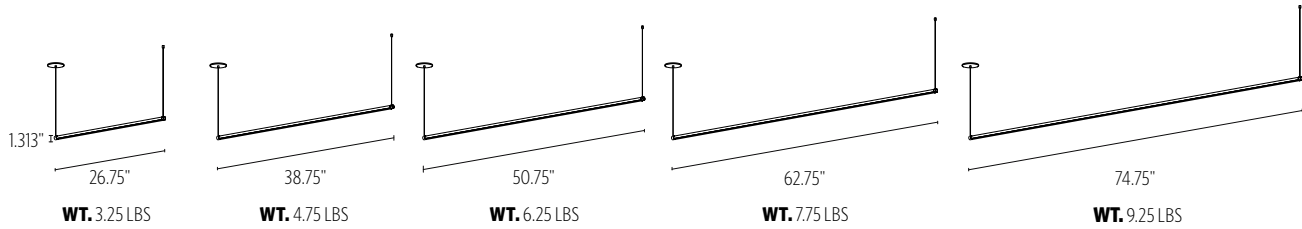

DIFFUSER



MW MATTE WHITE

FINISH

METALLIC POWDER COAT FINISHES:



SMP
SILVER



GRP
GRAPHITE



SGP
STEEL GRAY



GLP
GOLD



BMP
BRASS



BNP
BRONZE

PREMIUM METAL FINISHES:



BAL
BRUSHED
ALUMINUM

SOLID POWDER COAT FINISHES:



SWP
SKY WHITE



MWP
MATTE
WHITE



BKP
BLACK

TEXTURED POWDER COAT FINISHES:



BTP
BLACK
TEXTURED



WTP
WHITE
TEXTURED

RAL®, Pantone® or custom finishes are also available.

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.

EVERWOODS POWDER COAT COLLECTION:



WPDP
WHITE PINE



PNDP
PINE



CRDP
CHERRY



TKDP
TEAK



WLDP
WALNUT



DLDP
DARK
WALNUT



LWDP
LIGHT
BARNWOOD



DWDP
DARK
BARNWOOD

LIGHT SOURCE

LUMENS AND WATTAGE CHART

		27"	39"	51"	63"	75"
LED1	LUMENS DELIVERED	1080	1620	2160	2700	3240
	SYSTEM WATTAGE	12	18	24	30	36
LED2	LUMENS DELIVERED	1680	2520	3360	4200	5040
	SYSTEM WATTAGE	20	30	40	50	60

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp. Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

STANDARD COLOR TEMPERATURE OPTIONS	CRI	
2700K	80+	90+
3000K	80+	90+
3500K	80+	90+
4000K	80+	90+


For 80+ CRI - 80 RA, R9 > 0 (10-15 TYP.); For 90+ CRI - 90 RA, R9 > 50

ZONE	LUMENS	% OF LUMINAIRE
0-30	643	26%
0-60	1798	72%
0-90	2410	96%
90-180	112	5%
0-180	2520	100%

PHOTOMETRY:

FIXTURE: DA1-XXXX-39-MW-PTD-LED2_35K-120
 COLOR TEMP #: 3500K
 OUTPUT: 2520
 EFFICACY: 90 LM/W
 TEST REPORT: TEST NO. 18921.0

For all available IES files, please visit our website at ocl.com.

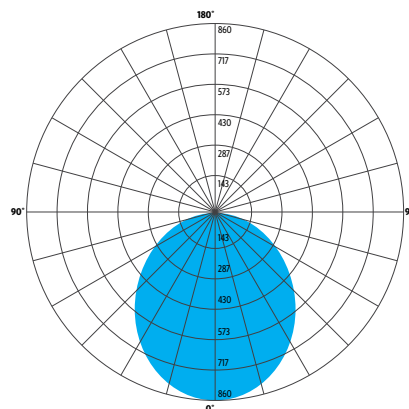

CONTROL

DM1 0-10V DIMMING DOWN TO 1%

- 0-10V DIMMING
- 1% MINIMUM DIMMING LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MIN AMBIENT OPERATING TEMPERATURE = -32°F
- FIELD REPLACEABLE

DM3 LUTRON HI-LUME ECOSYSTEM 1% (LDE1)

- LUTRON DIGITAL ECOSYSTEM DIMMING
- 1% MINIMUM DIMMING LEVEL
- SOFT-ON / FADE-TO-BLACK
- ELECTRONIC DRIVER
- POWER FACTOR >0.9 @ 120V
- THD <23% @ 120V
- MIN AMBIENT OPERATING TEMPERATURE = -32°F
- FIELD REPLACEABLE

OPTIONS

ULD DAMP LABEL LUMINAIRE

- MAY BE USED IN A OUTDOOR AREA THAT IS PROTECTED FROM DIRECT CONTACT WITH WIND, RAIN, SNOW OR EXCESSIVE MOISTURE

SCY 3.5" DIA. SMALL CANOPIES

- (REQUIRES PRE-INSTALLATION OF 3" MUD RING BY OTHERS; **S1SC ONLY**)



PRA 4" PROJECTION OFF WALL (S1SC ONLY)

- REDUCES THE STANDARD 6" MOUNTING DISTANCE TO 4" BY PROVIDING SHORTER STEMS FOR MOUNTING.

BIOS

- **BIOS** SKYBLUE™ DYNAMIC LIGHT ENGINE IS DIMMABLE AND FEATURES A SIMPLE APPROACH TO CIRCADIAN LIGHTING CONTROLS.
- WHEN PAIRED WITH THE BIOS BIO-DIMMING MODULE, IT OPERATES USING ANY SINGLE CHANNEL CONSTANT CURRENT (CC) LED DRIVER AND CAN BE USED WITH ANY STANDARD DIMMING INTERFACE/PROTOCOL (0-10V, ELV, DMX, WIRELESS) AND COULD WORK WITH EXISTING TWO-CHANNEL CONTROL SYSTEMS AS WELL.
- VISIT OCL.COM/BIOS FOR MORE INFORMATION

FOR MODIFIED & CUSTOM CONFIGURATIONS***

SCN STRAIGHT CONNECTOR

NOTE: SCN IS INSTALLED AND CONNECTED AT THE FACTORY.



ACN ADJUSTABLE CONNECTOR (PIEW ONLY)

NOTE: ACN IS INSTALLED AND CONNECTED AT THE FACTORY



MOD MODIFIED LUMINAIRE

- LUMINAIRE IS MODIFIED FROM STANDARD OPTIONS; CONTACT LOCAL REP FOR MORE INFORMATION

SPECIFICATIONS

CONSTRUCTION

- EXTRUDED AND MACHINED ALUMINUM BODY AND END CAPS
- EXTRUDED HIGH-PERFORMANCE FROSTED OPAL ACRYLIC DIFFUSER
- GALVANIZED STEEL AIRCRAFT CABLE
- HARDWARE IS ZINC PLATED STEEL OR STAINLESS STEEL
- CANOPY IS ALUMINUM

MOUNTING

- **PIEW** AND **S1SC** BOTH MOUNT TO 4X4" OCTAGON OR 4" ROUND J-BOX (BY OTHER)

ELECTRICAL

- DIMMING ELECTRONIC DRIVER(S), COMES STANDARD WITH 0-10V DOWN TO 1%.
- LUTRON (LDE1) ECOSYSTEM 1% ALSO AVAILABLE
- OCL PROPRIETARY LED ARRAYS USE NICHIA 757 DIODES
- LUMINAIRE WIRE LEADS ARE LOW-VOLTAGE; THE WIRES SHOULD BE CONNECTED TO OCL PROVIDED REMOTE DRIVER ENCLOSURE ONLY!

LISTING

- ETL LISTED TO UL1598 FOR INDOOR; DRY LOCATION (DAMP LOCATION OPTIONAL)

WARRANTY

- 5 YEAR; ALL ELECTRICAL COMPONENTS RETAIN THE MANUFACTURER'S WARRANTY

SUSTAINABILITY

- THIS PRODUCT MEETS THE MATERIAL RESTRICTIONS OF ARTICLE 4 OF THE **ROHS** DIRECTIVE (2011/65/EU), INCLUDING COMMISSION DELEGATED DIRECTIVE 2015/863
- **BIOS** LIGHTING CONTRIBUTES TOWARD THE CIRCADIAN LIGHTING DESIGN FEATURE 54 UNDER THE **WELL BUILDING STANDARD™ V1** AND FEATURE L03 UNDER THE **WELL BUILDING STANDARD V2**

COMMON MODIFICATIONS

WE'RE BUILT FOR OUT-OF-THE-BOX THINKERS.

Nearly 50% of OCL fixtures we manufacture have some type of modification. Here is a list of common modifications we frequently produce. **Please contact the factory for modifications specific to your fixture or project.**

Need some help? Simply send your questions to us at OCL-Quotes@ocl.com

- BIOS, TUNABLE WHITE, WARM-DIM, & RGBW LIGHT SOURCES
- SPECIFIC LUMEN OUTPUT
- MODIFIED CLUSTERS OR CONFIGURATIONS / MULTI-DROP CANOPIES
- VARIOUS SHAPES, ARCS, AND CURVES FOR LINEAR PROFILES AND RINGS
- CEILING OR SURFACE MOUNTING
- LARGE SCALE MODIFICATIONS
- RAL, PANTONE, BRAND-SPECIFIC, RETIRED OCL COLOR, OR CUSTOM FINISHES



- EMERGENCY BATTERY BACKUP OR INVERTER OPTIONS
- REMOTE DRIVERS / EXTENDED DISTANCE REMOTE DRIVERS
- DIMMING TO 0.1% (DIM TO DARK)
- NON-STANDARD SIZES OR LENGTHS
- NON-STANDARD CANOPY, BODY AND/OR CORD COLORS
- SEISMIC AND/OR ANTI-SWAY SYSTEMS
- RIGID STEMS
- MODIFIED OVERALL HEIGHTS (LONGER OR SHORTER OAH)
- UPLIGHT ADDITIONS
- LASER ETCHING, ENGRAVING, AND CUTOUTS

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.