



Fabric™

PENDANT

FEATURES


- HAND ROLLED TRIMS CREATE ELEGANT EDGES AT TOP AND BOTTOM OF FABRIC SHADE
- SEVEN STANDARD FABRIC CHOICES ARE AVAILABLE; CUSTOM FABRICS CAN BE SPECIFIED
- CUSTOMIZED SHAPES AND SIZES ARE POSSIBLE FOR FABRIC SHADES
- HEAVY GAUGE METAL FRAMES INCREASES RIGIDITY
- BOTTOM DIFFUSER FITS TIGHTLY INTO FABRIC SHADE; VIRGIN WHITE ACRYLIC IS UV STABLE AND UL-94 HB FLAME RATED
- BOTTOM DIFFUSERS ARE AVAILABLE WITH AN OPTIONAL ETCHED PATTERN, CUSTOM PATTERNS ARE POSSIBLE



CATALOG CODES

FB1	-	B	-	C	-	D	-	E	-	F	-	UNV	-	H	-	DM1	-	J
SERIES		HANGING SYSTEM		SIZE		DIFFUSER		FINISH		LIGHT SOURCE		VOLTAGE		OAH		CONTROL		OPTIONS

SPECIFY CATALOG CODE

A	B	C	D	E
SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH
 FB1 FABRIC ROUND	P1EC PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A WHITE POWER CORD TO CANOPY P1AA PENDANT WITH A SINGLE CENTER STEM	24 36 48	AC/GW PURE WHITE FABRIC BC/GW CREAM FABRIC CC/GW GINGER FABRIC DC/GW DRIFTWOOD FABRIC GC/GW HABANERO FABRIC HC/GW ESPRESSO FABRIC IC/GW MIDNIGHT BLACK FABRIC NOTE: GLOSS WHITE ACRYLIC BOTTOM DIFFUSER IS STANDARD	POWDER COAT FINISHES BKP BLACK BMP BRASS METALLIC BNP BRONZE BTP BLACK TEXTURED GRP GRAPHITE GLP GOLDTASTIC MWP MATTE WHITE SGP STEEL GRAY SMP SILVER METALLIC SWP SKY WHITE WTP WHITE TEXTURED PREMIUM METAL FINISH PAL POLISHED ALUMINUM BAL BRUSHED ALUMINUM PTR PEWTER PBR POLISHED BRASS BBR BRUSHED BRASS ABR ANTIQUE BRASS STB STATUARY BRONZE SNK SATIN NICKEL ORB OIL RUBBED BRONZE
F	G	H	I	J
LIGHT SOURCE	VOLTAGE	OAH	CONTROL	OPTIONS
LED OUTPUT LED1 LED2	COLOR TEMP (80+ CRI) 27K 30K 35K 40K	COLOR TEMP (90+ CRI) 927K 930K 935K 940K	UNV 120-277 48 100 144 NOTE: FOR P1AA SPECIFY IN INCHES TO THE NEAREST INCH	DM1 0-10V DIMMING 1% EPD ETCHED PATTERN BOTTOM DIFFUSER ULD DAMP LABEL MOD MODIFIED LUMINAIRE (CONTACT LOCAL REP)

SAMPLE CODE: FB1-P1AA-24-AC/GW-WTP-LED1/35K-UNV-30-DM1

MODS, NOTES, & COMMENTS

LUMENS AND WATTAGE CHART



		24"	36"	48"
LED1	LUMENS DELIVERED	3150	3150	3150
	SYSTEM WATTAGE	50	50	50
LED2	LUMENS DELIVERED	6350	6350	6350
	SYSTEM WATTAGE	105	105	105

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.

Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

HANGING SYSTEM

PIEC PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A WHITE POWER CORD TO CANOPY

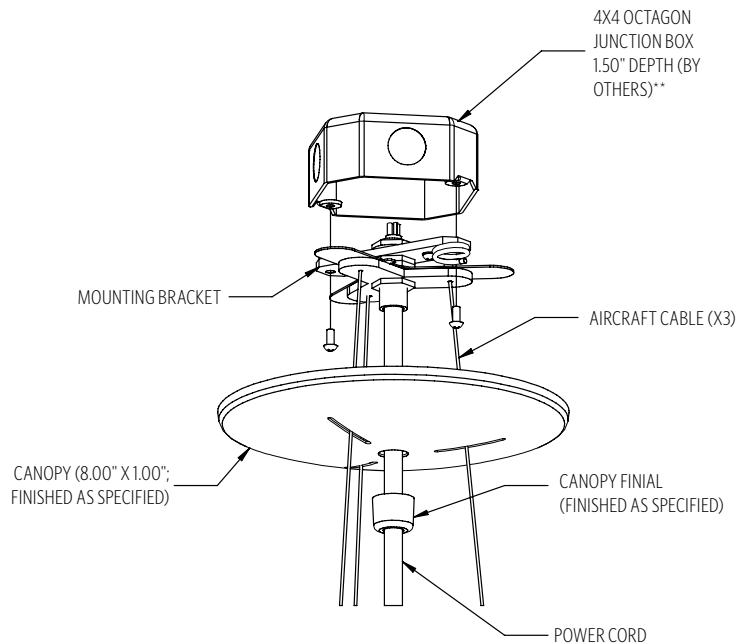



MOUNTING INFORMATION CHART

LUMINAIRE DIAMETER	LUMINAIRE WEIGHT	MOUNTING POINTS	MIN/MAX OAH
24"	18LBS	1	17"/144"
36"	29LBS	1	21"/144"
48"	50LBS	1	23"/144"

* PIEC ships with one of three OAH's (48", 100" or 144") and is field adjustable to the desired height.

PIAA PENDANT WITH A SINGLE CENTER STEM

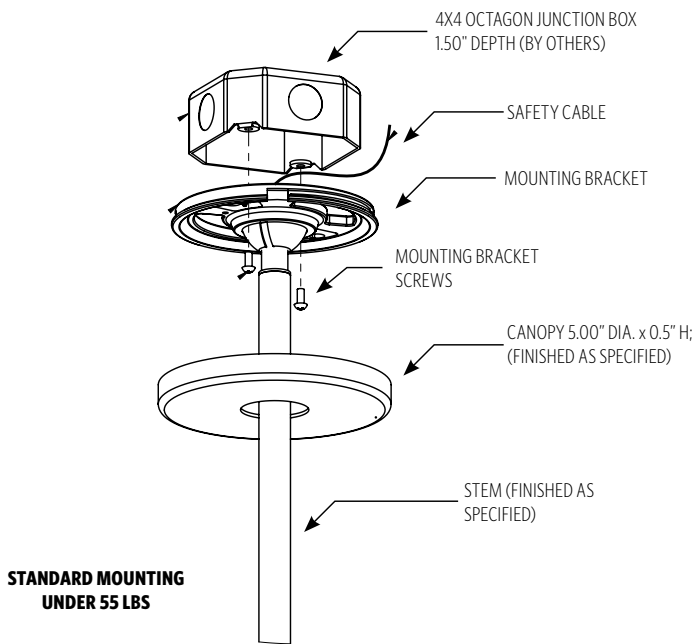


**STANDARD MOUNTING
UNDER 55 LBS**

MOUNTING INFORMATION CHART

LUMINAIRE DIAMETER	LUMINAIRE WEIGHT	MOUNTING POINTS	MIN/MAX OAH
24"	18LBS	1	17"/152"
36"	29LBS	1	21"/156"
48"	50LBS	1	23"/160"

* PIAA OAH should be specified to the nearest inch

SIZES

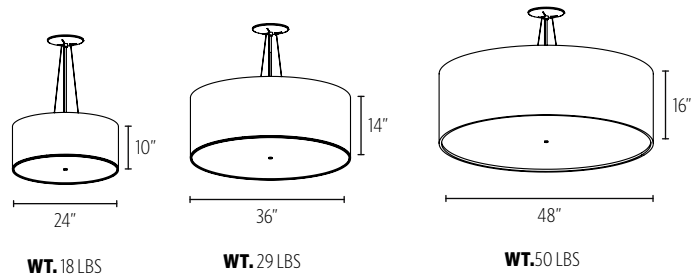

DIFFUSER



GW GLOSS WHITE
ACRYLIC (STANDARD
BOTTOM DIFFUSER)

FABRICS:



AC
PURE
WHITE



BC
CREAM



CC
GINGER



DC
DRIFTWOOD



GC
HABENERO



HC
ESPRESSO



IC
MIDNIGHT
BLACK

FINISH

METALLIC POWDER COAT FINISHES:



SMP
SILVER



GRP
GRAPHITE



SGP
STEEL GRAY



GLP
GOLDTASTIC



BMP
BRASS



BNP
BRONZE

SOLID POWDER COAT FINISHES:



SWP
SKY WHITE



MWP
MATTE
WHITE



BKP
BLACK

TEXTURED POWDER COAT FINISHES:



BTP
BLACK
TEXTURED



WTP
WHITE
TEXTURED

RAL*, Pantone® or custom finishes are also available.

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.


PREMIUM METAL FINISHES:



PAL
POLISHED
ALUMINUM



BAL
BRUSHED
ALUMINUM




PTR
PEWTER



PBR
POLISHED
BRASS



BBR
BRUSHED
BRASS



ABR
ANTIQUE
BRASS



STB
STATUARY
BRONZE



SNK
SATIN
NICKEL



ORB
OIL RUBBED
BRONZE

LIGHT SOURCE

		LUMENS AND WATTAGE CHART		
		24"	36"	48"
LED1	LUMENS DELIVERED	3150	3150	3150
	SYSTEM WATTAGE	50	50	50
LED2	LUMENS DELIVERED	6350	6350	6350
	SYSTEM WATTAGE	105	105	105

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.

Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

STANDARD COLOR TEMPERATURE OPTIONS	CRI (RA)	
2700K	80+	90+
3000K	80+	90+
3500K	80+	90+
4000K	80+	90+

For 80+ CRI - 80 RA, R9 > 0 (10-15 TYP); For 90+ CRI - 90 RA, R9 > 50

CONTROL

DM1 0-10V DIMMING DOWN TO 1%

- 0-10V DIMMING
- 1% MINIMUM DIMMING LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MIN AMBIENT OPERATING TEMPERATURE = -40°F
- FIELD REPLACEABLE

OPTIONS

ULD DAMP LABEL LUMINAIRE

- MAY BE USED IN A OUTDOOR AREA THAT IS PROTECTED FROM DIRECT CONTACT WITH WIND, RAIN, SNOW OR EXCESSIVE MOISTURE

EPD ETCHED PATTERN BOTTOM DIFFUSER



MOD MODIFIED LUMINAIRE

- LUMINAIRE IS MODIFIED FROM STANDARD OPTIONS; CONTACT LOCAL REP FOR MORE INFORMATION

SPECIFICATIONS

CONSTRUCTION

- ALUMINUM AND STEEL CONSTRUCTION
- HANGING SYSTEMS USE STEEL OR ALUMINUM CANOPIES WITH AIRCRAFT CABLE SUPPORTS
- HARDWARE IS STEEL OR STAINLESS STEEL
- SHADE IS STEEL WELDED FRAME WITH HAND-ROLLED FABRIC

MOUNTING

- **P1EC**, AND **P1AA** MOUNT TO 4X4" OCTAGON OR 4" ROUND J-BOX (BY OTHER)

ELECTRICAL

- DIMMING ELECTRONIC DRIVER(S), COMES STANDARD WITH 0-10V DOWN TO 1%.
- OCL PROPRIETARY LED ARRAYS USE NICHIA 757 DIODES
- **FOR INTEGRAL DRIVERS:** LUMINAIRE CONNECTS TO BUILDING SUPPLY (120V-277V 50/60HZ)

LISTING

- ETL LISTED TO UL1598 FOR INDOOR, DRY LOCATION (DAMP LOCATION OPTIONAL)

WARRANTY

- 5 YEAR; ALL ELECTRICAL COMPONENTS RETAIN THE MANUFACTURER'S WARRANTY

SUSTAINABILITY

- THIS PRODUCT MEETS THE MATERIAL RESTRICTIONS OF ARTICLE 4 OF THE **ROHS** DIRECTIVE (2011/65/EU), INCLUDING COMMISSION DELEGATED DIRECTIVE 2015/863

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.



p: 314.863.1895 | f: 314.863.3278 | www.ocl.com

A brand of  **legrand**

Designed and Fabricated in St. Louis, Missouri → USA