



# Fabric™

## PENDANT

### FEATURES


- HAND ROLLED TRIMS CREATE ELEGANT EDGES AT TOP AND BOTTOM OF FABRIC SHADE
- EIGHT STANDARD FABRIC CHOICES ARE AVAILABLE; CUSTOM FABRICS CAN BE SPECIFIED
- CUSTOMIZED SHAPES AND SIZES ARE POSSIBLE FOR FABRIC SHADES
- HEAVY GAUGE METAL FRAMES INCREASES RIGIDITY
- BOTTOM DIFFUSER FITS TIGHTLY INTO FABRIC SHADE; VIRGIN WHITE ACRYLIC IS UV STABLE AND UL-94 HB FLAME RATED
- BOTTOM DIFFUSERS ARE AVAILABLE WITH AN OPTIONAL ETCHED PATTERN, CUSTOM PATTERNS ARE POSSIBLE



### CATALOG CODES

<b>FB1</b>	-	<b>B</b>	-	<b>C</b>	-	<b>D</b>	-	<b>E</b>	-	<b>F</b>	-	<b>UNV</b>	-	<b>H</b>	-	<b>DM1</b>	-	<b>J</b>
SERIES		HANGING SYSTEM		SIZE		DIFFUSER		FINISH		LIGHT SOURCE		VOLTAGE		OAH		CONTROL		OPTIONS

### SPECIFY CATALOG CODE

A	B	C	D	E
SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH
 <b>FB1</b> FABRIC ROUND	<b>PIEC</b> PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A WHITE POWER CORD TO CANOPY  <b>P1AA</b> PENDANT WITH A SINGLE CENTER STEM	<b>24</b>  <b>36</b>  <b>48</b>	<b>AC/GW</b> PURE WHITE FABRIC <b>BC/GW</b> CREAM FABRIC <b>CC/GW</b> GINGER FABRIC <b>DC/GW</b> DRIFTWOOD FABRIC <b>EC/GW</b> PLATINUM FABRIC <b>GC/GW</b> HABANERO FABRIC <b>HC/GW</b> ESPRESSO FABRIC <b>IC/GW</b> MIDNIGHT BLACK FABRIC  <b>NOTE:</b> GLOSS WHITE ACRYLIC BOTTOM DIFFUSER IS STANDARD	<b>POWDER COAT FINISHES</b> <b>BKP</b> BLACK <b>BMP</b> BRASS METALLIC <b>BNP</b> BRONZE <b>BTP</b> BLACK TEXTURED <b>GRP</b> GRAPHITE <b>GLP</b> GOLDTASTIC <b>MWP</b> MATTE WHITE <b>SGP</b> STEEL GRAY <b>SMP</b> SILVER METALLIC <b>SWP</b> SKY WHITE <b>WTP</b> WHITE TEXTURED  <b>PREMIUM METAL FINISH</b> <b>PAL</b> POLISHED ALUMINUM <b>BAL</b> BRUSHED ALUMINUM <b>PTR</b> PEWTER <b>PBR</b> POLISHED BRASS <b>BBR</b> BRUSHED BRASS <b>ABR</b> ANTIQUE BRASS <b>STB</b> STATUARY BRONZE <b>SNK</b> SATIN NICKEL <b>ORB</b> OIL RUBBED BRONZE
F	G	H	I	J
LIGHT SOURCE	VOLTAGE	OAH	CONTROL	OPTIONS
<b>LED OUTPUT</b> <b>LED1</b> <b>LED2</b>	<b>COLOR TEMP</b> (80+ CRI) <b>27K</b> <b>30K</b> <b>35K</b> <b>40K</b>	<b>COLOR TEMP</b> (90+ CRI) <b>927K</b> <b>930K</b> <b>935K</b> <b>940K</b>	<b>UNV</b> 120-277  <b>48</b> <b>100</b> <b>144</b>  <b>NOTE: FOR P1AA</b> SPECIFY IN INCHES TO THE NEAREST INCH	<b>DM1</b> 0-10V DIMMING 1%  <b>EPD</b> ETCHED PATTERN BOTTOM DIFFUSER <b>ULD</b> DAMP LABEL <b>MOD</b> MODIFIED LUMINAIRE (CONTACT LOCAL REP)

SAMPLE CODE: FB1-P1AA-24-AC/GW-WTP-LED1/35K-UNV-30-DM1

### MODS, NOTES, & COMMENTS

### LUMENS AND WATTAGE CHART



		24"	36"	48"
<b>LED1</b>	LUMENS DELIVERED	3150	3150	3150
	SYSTEM WATTAGE	50	50	50
<b>LED2</b>	LUMENS DELIVERED	6350	6350	6350
	SYSTEM WATTAGE	105	105	105

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.

Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

## HANGING SYSTEM

### PIEC PENDANT WITH 3 ANGLED AIRCRAFT CABLES AND A WHITE POWER CORD TO CANOPY

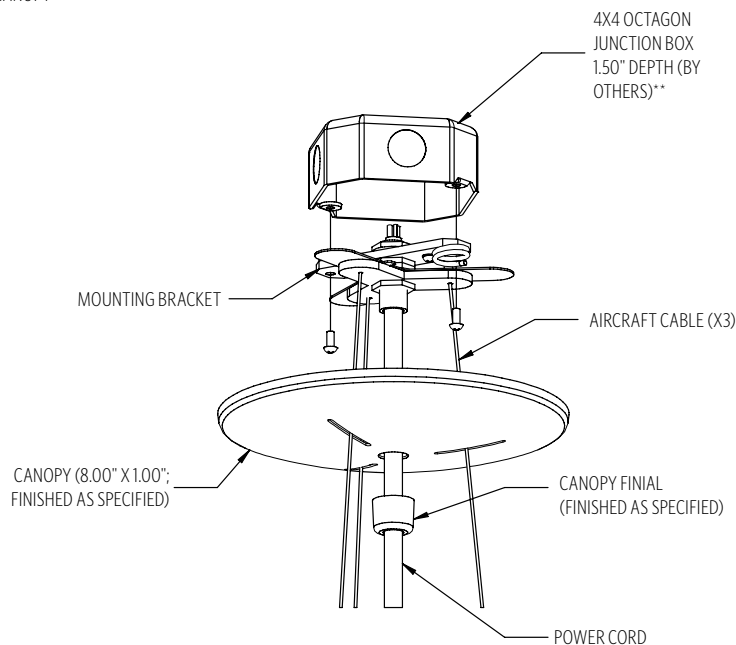



#### MOUNTING INFORMATION CHART

LUMINAIRE DIAMETER	LUMINAIRE WEIGHT	MOUNTING POINTS	MIN/MAX OAH
24"	18LBS	1	17"/144"
36"	29LBS	1	21"/144"
48"	50LBS	1	23"/144"

\* PIEC ships with one of three OAH's (48", 100" or 144") and is field adjustable to the desired height.

### PIAA PENDANT WITH A SINGLE CENTER STEM

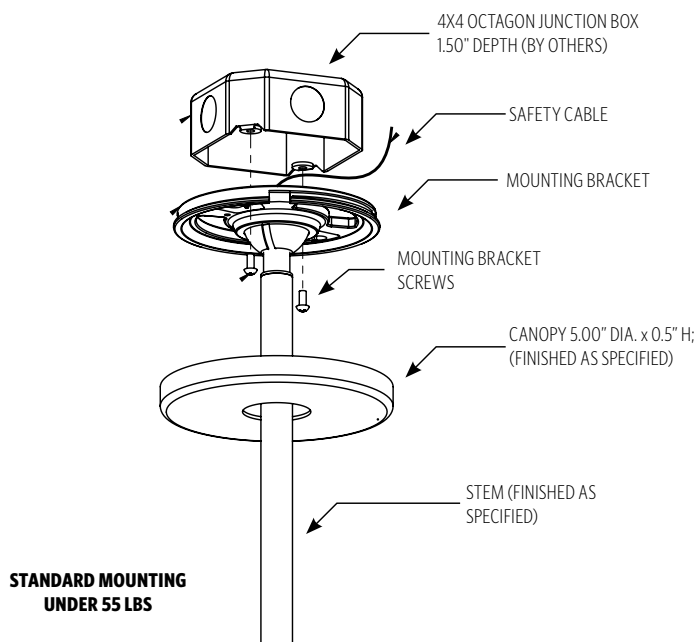


**STANDARD MOUNTING  
UNDER 55 LBS**

#### MOUNTING INFORMATION CHART

LUMINAIRE DIAMETER	LUMINAIRE WEIGHT	MOUNTING POINTS	MIN/MAX OAH
24"	18LBS	1	17"/152"
36"	29LBS	1	21"/156"
48"	50LBS	1	23"/160"

\* PIAA OAH should be specified to the nearest inch

## SIZES

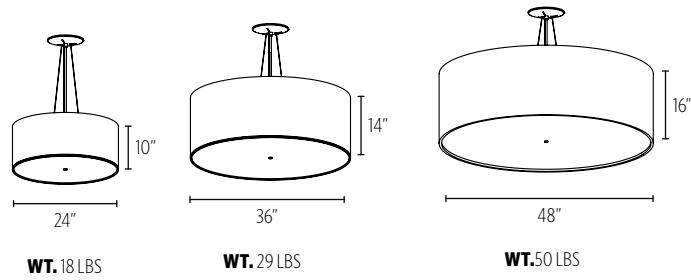

## DIFFUSER



**GW** GLOSS WHITE  
ACRYLIC (STANDARD  
BOTTOM DIFFUSER)

### FABRICS:



**AC**  
PURE  
WHITE



**BC**  
CREAM



**CC**  
GINGER



**DC**  
DRIFTWOOD



**EC**  
PLATINUM



**GC**  
HABENERO



**HC**  
ESPRESSO



**IC**  
MIDNIGHT  
BLACK

## FINISH

### METALLIC POWDER COAT FINISHES:



**SMP**  
SILVER



**GRP**  
GRAPHITE



**SGP**  
STEEL GRAY



**GLP**  
GOLDTASTIC



**BMP**  
BRASS



**BNP**  
BRONZE

### SOLID POWDER COAT FINISHES:



**SWP**  
SKY WHITE



**MWP**  
MATTE  
WHITE



**BKP**  
BLACK

### TEXTURED POWDER COAT FINISHES:



**BTP**  
BLACK  
TEXTURED



**WTP**  
WHITE  
TEXTURED

**RAL\*, Pantone\* or custom finishes are also available.**

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.


### PREMIUM METAL FINISHES:



**PAL**  
POLISHED  
ALUMINUM



**BAL**  
BRUSHED  
ALUMINUM




**PTR**  
PEWTER



**PBR**  
POLISHED  
BRASS



**BBR**  
BRUSHED  
BRASS



**ABR**  
ANTIQUE  
BRASS



**STB**  
STATUARY  
BRONZE



**SNK**  
SATIN  
NICKEL



**ORB**  
OIL RUBBED  
BRONZE

## LIGHT SOURCE

		LUMENS AND WATTAGE CHART		
		24"	36"	48"
<b>LED1</b>	LUMENS DELIVERED	3150	3150	3150
	SYSTEM WATTAGE	50	50	50
<b>LED2</b>	LUMENS DELIVERED	6350	6350	6350
	SYSTEM WATTAGE	105	105	105

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.

Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

STANDARD COLOR TEMPERATURE OPTIONS	CRI (RA)	
2700K	80+	90+
3000K	80+	90+
3500K	80+	90+
4000K	80+	90+

For 80+ CRI - 80 RA, R9 > 0 (10-15 TYP); For 90+ CRI - 90 RA, R9 > 50

**\*\*LED PHOTOMETRIC INFORMATION PENDING\*\***

## CONTROL

### DM1 0-10V DIMMING DOWN TO 1%


- 0-10V DIMMING
- 1% MINIMUM DIMMING LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MIN AMBIENT OPERATING TEMPERATURE = -40°F
- FIELD REPLACEABLE

## OPTIONS

### ULD DAMP LABEL LUMINAIRE

- MAY BE USED IN A OUTDOOR AREA THAT IS PROTECTED FROM DIRECT CONTACT WITH WIND, RAIN, SNOW OR EXCESSIVE MOISTURE

### EPD ETCHED PATTERN BOTTOM DIFFUSER



### MOD MODIFIED LUMINAIRE

- LUMINAIRE IS MODIFIED FROM STANDARD OPTIONS; CONTACT LOCAL REP FOR MORE INFORMATION

## SPECIFICATIONS

### CONSTRUCTION

- ALUMINUM AND STEEL CONSTRUCTION
- HANGING SYSTEMS USE STEEL OR ALUMINUM CANOPIES WITH AIRCRAFT CABLE SUPPORTS
- HARDWARE IS STEEL OR STAINLESS STEEL
- SHADE IS STEEL WELDED FRAME WITH HAND-ROLLED FABRIC

### MOUNTING

- **PIEC**, AND **PIAA** MOUNT TO 4X4" OCTAGON OR 4" ROUND J-BOX (BY OTHER)

### ELECTRICAL

- DIMMING ELECTRONIC DRIVER(S), COMES STANDARD WITH 0-10V DOWN TO 1%.
- OCL PROPRIETARY LED ARRAYS USE NICHIA 757 DIODES
- **FOR INTEGRAL DRIVERS:** LUMINAIRE CONNECTS TO BUILDING SUPPLY (120V-277V 50/60HZ)

### LISTING

- ETL LISTED TO UL1598 FOR INDOOR, DRY LOCATION (DAMP LOCATION OPTIONAL)

### WARRANTY

- 5 YEAR; ALL ELECTRICAL COMPONENTS RETAIN THE MANUFACTURER'S WARRANTY

### SUSTAINABILITY

- THIS PRODUCT MEETS THE MATERIAL RESTRICTIONS OF ARTICLE 4 OF THE **ROHS** DIRECTIVE (2011/65/EU), INCLUDING COMMISSION DELEGATED DIRECTIVE 2015/863

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.



p: 314.863.1895 | f: 314.863.3278 | [www.ocl.com](http://www.ocl.com)

A brand of **legrand**

Designed and Fabricated in St. Louis, Missouri » USA