



# Fiori™

CEILING / SCONCE / OUTDOOR





**FEATURES**

- EXCELLENT THERMAL MANAGEMENT IS ACHIEVED THROUGH AN EXTRUDED AND MACHINED ALUMINUM FIXTURE BODY
- 45° CUTOFF AND STEPPED BEZEL MINIMIZES GLARE AND INCREASES VISUAL COMFORT
- NUMEROUS SECONDARY LENS OPTIONS AVAILABLE
- VARYING BEAM SPREAD OPTIONS ARE AVAILABLE: NARROW FLOOD [24 DEGREE] OR WIDE FLOOD [50 DEGREE]
- 3 STEP LED BINNING



**CATALOG CODES**

A	B	C	D	E	F	UNV	H	I
SERIES	HANGING SYSTEM	SIZE	REFLECTOR	FINISH	LIGHT SOURCE	VOLTAGE	CONTROL	OPTIONS

SPECIFY CATALOG CODE				
A	B	C	D	E
SERIES	H	SIZE	REFLECTOR	FINISH
 FR2   FR3   FR4	<b>C1NA</b> INDOOR SURFACE CEILING MOUNT	<b>08</b>	<b>NF</b> NARROW FLOOD [24 DEGREE]	<b>POWDER COAT FINISHES</b> <b>BKP</b> BLACK <b>BMP</b> BRASS METALLIC <b>BNP</b> BRONZE <b>BTP</b> BLACK TEXTURED <b>GRP</b> GRAPHITE <b>GLP</b> GOLDTASTIC <b>MWP</b> MATTE WHITE <b>SGP</b> STEEL GRAY <b>SMP</b> SILVER METALLIC <b>SWP</b> SKY WHITE <b>WTP</b> WHITE TEXTURED
	<b>S1SC</b> INDOOR SCONCE		<b>WF</b> WIDE FLOOD [50 DEGREE]	
	<b>O10B</b> OUTDOOR SCONCE (ETL LISTED FOR WET LOCATION)			
 FR1		<b>13</b> (FR1 ONLY)		

F			G	H		I
LIGHT SOURCE			VOLTAGE	CONTROL		OPTIONS
<b>8"</b>			<b>UNV</b> 120-277	<b>DM0</b> 0-10V DIMMING 10% (FR1 WITH 2LED1 ONLY) <b>DM1</b> 0-10V DIMMING 1% (NOT AVAILABLE IN 2LED1) <b>DM3</b> LUTRON HI-LUME ECOSYSTEM 1% (LDE1); FR1 ONLY, NOT AVAILABLE IN 2LED1	<b>ULD</b> DAMP LABEL (C1NA & S1SC ONLY) <b>BIOS</b> BIOS SKYBLUE™ OR BIOS SKYBLUE™ DYNAMIC LIGHT ENGINE* <b>HCL</b> HEX CELL LOUVER <b>SFL</b> SOFTENING LENS <b>SPL</b> SPREAD LENS <b>LSL</b> LINEAR SPREAD LENS <b>MOD</b> MODIFIED LUMINAIRE (CONTACT LOCAL REP)	
<b>LED OUTPUT</b>	<b>COLOR TEMP</b> (80+ CRI)	<b>COLOR TEMP</b> (90+ CRI)				
<b>LED1</b>	<b>27K</b>	<b>927K</b>				
	<b>30K</b>	<b>930K</b>				
	<b>35K</b>	<b>935K</b>				
	<b>40K</b>	<b>940K</b>				
<b>13"</b>						
<b>LED1</b>	<b>27K</b>	<b>927K</b>				
<b>LED2</b>	<b>30K</b>	<b>930K</b>				
<b>LED3</b>	<b>35K</b>	<b>935K</b>				
	<b>40K</b>	<b>940K</b>				
<b>2LED1*</b>						
FR1 WITH S1SC OR O10B ONLY						

**SAMPLE CODE: FR2-S1SC-08-WF-BTP-LED1/35K-UNV-DM1-HCL**



UP TO **93** LM/W

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp. Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.  
 \*2LED1 is up/down illumination. LED1, LED2, & LED3 are same direction.

LUMENS AND WATTAGE CHART			
		8"	13"
<b>LED1</b>	LUMENS DELIVERED	1500	1500
	SYSTEM WATTAGE	16	16
<b>LED2</b>	LUMENS DELIVERED	NA	2135
	SYSTEM WATTAGE	NA	26
<b>LED3</b>	LUMENS DELIVERED	NA	2855
	SYSTEM WATTAGE	NA	37
<b>2LED1*</b>	LUMENS DELIVERED	NA	2750
	SYSTEM WATTAGE	NA	32

## HANGING SYSTEM


### C1NA INDOOR SURFACE CEILING MOUNT

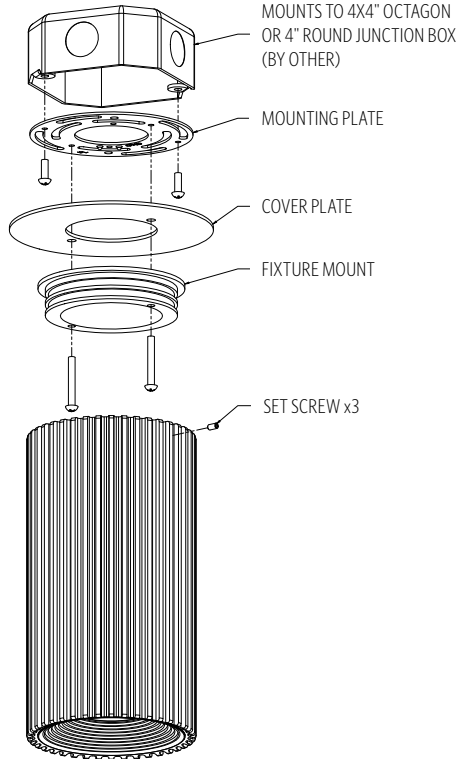

#### MOUNTING INFORMATION CHART



LUMINAIRE HEIGHT	LUMINAIRE WEIGHT	MOUNTING POINTS
8"	6 LBS	1
13"	9 LBS	1

Fixture is provided with 5" dia. cover plate finished to match the fixture body; if no visible cover plate is desired, a 3" mud ring should be pre-installed (supplied by others); 5" dia. cover plate can be discarded if unused.



MOUNTS TO 4X4" OCTAGON OR 4" ROUND JUNCTION BOX (BY OTHER)





### S1SC INDOOR SCONCE O10B OUTDOOR SCONCE (ETL LISTED FOR WET LOCATION)

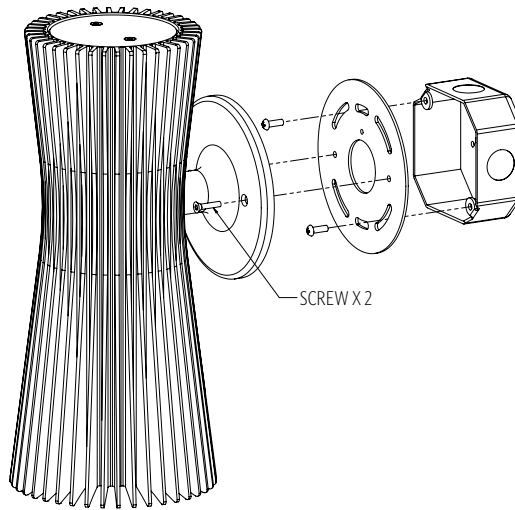

#### MOUNTING INFORMATION CHART

LUMINAIRE HEIGHT	LUMINAIRE WEIGHT	MOUNTING POINTS
8"	6 LBS	1
13"	9 LBS	1

## SIZES



## FINISH

### METALLIC POWDER COAT FINISHES:



### SOLID POWDER COAT FINISHES:



### TEXTURED POWDER COAT FINISHES:



**RAL®, Pantone®, or custom finishes are also available.**

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.

## LIGHT SOURCE

LUMENS AND WATTAGE CHART		8"		13"	
		LUMENS DELIVERED	SYSTEM WATTAGE	LUMENS DELIVERED	SYSTEM WATTAGE
<b>LED1</b>	LUMENS DELIVERED	1500	1500		
	SYSTEM WATTAGE	16	16		
<b>LED2</b>	LUMENS DELIVERED	NA	2135		
	SYSTEM WATTAGE	NA	26		
<b>LED3</b>	LUMENS DELIVERED	NA	2855		
	SYSTEM WATTAGE	NA	37		
<b>2LED1*</b>	LUMENS DELIVERED	NA	2750		
	SYSTEM WATTAGE	NA	32		

STANDARD COLOR TEMPERATURE OPTIONS	CRI	
	80+	90+
2700K	80+	90+
3000K	80+	90+
3500K	80+	90+
4000K	80+	90+

For 80+ CRI - 80 RA, R9 > 0 (10-15 TYP); For 90+ CRI - 90 RA, R9 > 50

### PHOTOMETRY:


**FIXTURE:** FRI-P1CB-13-NF-PTD-1LD15/35K-120  
**COLOR TEMP #:** 3500K  
**OUTPUT:** 1500  
**EFFICACY:** 93 LM/W  
**TEST REPORT:** TEST NO. 18332.0

For all available IES files, please visit our website at [ocl.com](http://ocl.com).


This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp. Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

\*2LED1 is up/down illumination. LED1, LED2, & LED3 are same direction.


ZONE	NARROW FLOOD		WIDE FLOOD		NARROW FLOOD UP/DOWN (2LED1)		WIDE FLOOD UP/DOWN (2LED1)	
	LUMENS	% OF LUMINAIRE	LUMENS	% OF LUMINAIRE	LUMENS	% OF LUMINAIRE	LUMENS	% OF LUMINAIRE
0-30	1187	81%	1112	74%	1187	40%	1112	37%
0-60	1468	99.7%	1499	100%	1468	49%	1499	50%
0-90	1472	100%	1499	100%	1472	50%	1499	50%
0-120	-	-	-	-	2374	80%	2224	74%
0-150	-	-	-	-	2936	99%	2998	100%
0-180	-	-	-	-	2944	100%	2998	100%




**NARROW FLOOD**



**WIDE FLOOD**



**NARROW FLOOD UP & DOWN (2LED1)**



**WIDE FLOOD UP & DOWN (2LED1)**

## CONTROL

### DMO 0-10V DIMMING DOWN TO 10% (FR1 WITH 2LED1 ONLY)

- 0-10V DIMMING
- 10% MINIMUM DIM LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MIN AMBIENT OPERATING TEMPERATURE -31°F
- FIELD REPLACEABLE

### DM1 0-10V DIMMING DOWN TO 1%

- 0-10V DIMMING
- 1% MINIMUM DIMMING LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MIN AMBIENT OPERATING TEMPERATURE = -31°F
- FIELD REPLACEABLE

### DM3 LUTRON HI-LUME ECOSYSTEM 1% (LDE1; FR1 ONLY)

- LUTRON DIGITAL ECOSYSTEM DIMMING
- 1% MINIMUM DIMMING LEVEL
- SOFT-ON / FADE-TO-BLACK
- ELECTRONIC DRIVER
- POWER FACTOR >0.9 @ 120V
- THD <23% @ 120V
- MIN AMBIENT OPERATING TEMPERATURE = 32°F
- FIELD REPLACEABLE

## OPTIONS

### ULD DAMP LABEL LUMINAIRE

- MAY BE USED IN AN OUTDOOR AREA THAT IS PROTECTED FROM DIRECT CONTACT WITH WIND, RAIN, SNOW OR EXCESSIVE MOISTURE

### BIOS

- **BIOS SKYBLUE™ DYNAMIC** LIGHT ENGINE IS DIMMABLE AND FEATURES A SIMPLE APPROACH TO CIRCADIAN LIGHTING CONTROLS. WHEN PAIRED WITH THE BIOS BIO-DIMMING MODULE, IT OPERATES USING ANY SINGLE CHANNEL CONSTANT CURRENT (CC) LED DRIVER AND CAN BE USED WITH ANY STANDARD DIMMING INTERFACE/PROTOCOL (0-10V, ELV, DMX, WIRELESS) AND COULD WORK WITH EXISTING TWO-CHANNEL CONTROL SYSTEMS AS WELL.
- VISIT [OCL.COM/BIOS](http://OCL.COM/BIOS) FOR MORE INFORMATION

### HCL HEX CELL LOUVER

- PROVIDES A 45° VISUAL CUT-OFF TO HELP REDUCE GLARE

### SFL SOFTENING LENS

- TEXTURED LENS THAT SOFTENS AND SPREADS BEAM

### SPL SPREAD LENS

- DIRECTS THE LAMP BEAM TO CREATE A DIFFUSED SPREAD IN AN EVEN PATTERN IN ALL DIRECTIONS

### LSL LINEAR SPREAD LENS

- PRODUCES ASYMMETRICAL LIGHT DISTRIBUTION, CREATING AN OVAL OF LIGHT

### MOD MODIFIED LUMINAIRE

- LUMINAIRE IS MODIFIED FROM STANDARD OPTIONS; CONTACT LOCAL REP FOR MORE INFORMATION

## SPECIFICATIONS

### CONSTRUCTION

- FIXTURE IS EXTRUDED AND MACHINED ALUMINUM
- HARDWARE IS ZINC PLATED OR STAINLESS STEEL

### LENSING

- STANDARD LENS INCLUDED FOR 2LED1 ONLY
- FOR **SISA** IN UPWARD FACING ORIENTATION, NOTE IN MODIFICATIONS AND A LENS WILL BE PROVIDED

### ELECTRICAL

- DIMMING ELECTRONIC DRIVER(S), COMES STANDARD WITH 0-10V DOWN TO 10%
- 0-10V DOWN TO 1% AND LUTRON ECOSYSTEM (LDE1) 1% ALSO AVAILABLE AS MODIFICATION (REQUIRES REMOTE DRIVERS; **FR1 ONLY**, NOT AVAILABLE IN **2LED1**)
- BRIDGELUX COB
- LUMINAIRE CONNECTS TO BUILDING SUPPLY (120V-277V 50/60HZ) UNLESS DRIVERS ARE REMOTE

### LISTING

- **SISC & CINA** ETL LISTED TO UL 1598 FOR DRY LOCATIONS; **ULD** DAMP LOCATION LISTED IS OPTION
- **OTOB** ETL LISTED TO UL 1598 FOR WET LOCATION

### WARRANTY

- 5 YEAR; ALL ELECTRICAL COMPONENTS RETAIN THE MANUFACTURER'S WARRANTY

### BUILD AMERICA, BUY AMERICA (BABA)

- THIS PRODUCT MEETS THE GUIDELINES FOR THE BUILD AMERICA, BUY AMERICA ACT. **SOME EXCLUSIONS APPLY.** FOR MORE INFORMATION AND A FULL LIST OF ELIGIBLE SKUS, VISIT [OCL.COM/BABA](http://OCL.COM/BABA)

### SUSTAINABILITY

- **BIOS** LIGHTING CONTRIBUTES TOWARD THE CIRCADIAN LIGHTING DESIGN FEATURE 54 UNDER THE **WELL BUILDING STANDARD™ V1** AND FEATURE L03 UNDER THE **WELL BUILDING STANDARD V2**
- THIS PRODUCT MEETS THE MATERIAL RESTRICTIONS OF ARTICLE 4 OF THE **ROHS** DIRECTIVE (2011/65/EU), INCLUDING COMMISSION DELEGATED DIRECTIVE 2015/863

## COMMON MODIFICATIONS

### WE'RE BUILT FOR OUT-OF-THE-BOX THINKERS.

Nearly 50% of OCL fixtures we manufacture have some type of modification. Here is a list of common modifications we frequently produce. **Please contact the factory for modifications specific to your fixture or project.**

Need some help? Simply send your questions to us at [OCL-Quotes@ocl.com](mailto:OCL-Quotes@ocl.com)

- BIOS, TUNABLE WHITE, WARM-DIM, & RGBW LIGHT SOURCES
- SPECIFIC LUMEN OUTPUT
- MODIFIED CLUSTERS OR CONFIGURATIONS / MULTI-DROP CANOPIES
- VARIOUS SHAPES, ARCS, AND CURVES FOR LINEAR PROFILES AND RINGS
- CEILING OR SURFACE MOUNTING
- LARGE SCALE MODIFICATIONS
- RAL, PANTONE, BRAND-SPECIFIC, RETIRED OCL COLOR, OR CUSTOM FINISHES



- EMERGENCY BATTERY BACKUP OR INVERTER OPTIONS
- REMOTE DRIVERS / EXTENDED DISTANCE REMOTE DRIVERS
- DIMMING TO 0.1% (DIM TO DARK)
- NON-STANDARD SIZES OR LENGTHS
- NON-STANDARD CANOPY, BODY AND/OR CORD COLORS
- SEISMIC AND/OR ANTI-SWAY SYSTEMS
- RIGID STEMS
- MODIFIED OVERALL HEIGHTS (LONGER OR SHORTER OAH)
- UPLIGHT ADDITIONS
- LASER ETCHING, ENGRAVING, AND CUTOUTS

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.