

Glowstick™ PENDANT

FEATURES

- ELEGANT & CONTEMPORARY DESIGN WITH END LIT DIFFUSER
- EXCELLENT THERMAL MANAGEMENT IS ACHIEVED THROUGH AN EXTRUDED AND MACHINED ALUMINUM FIXTURE BODY
- FIXTURES CAN BE CLUSTERED TOGETHER TO CREATE LARGE SCALE INSTALLATIONS.
- AVAILABLE IN 80+ CRI AND 90+ CRI (R9>50)
- 3 STEP LED BINNING
- FIELD REPLACEABLE LEDS AND DRIVERS


CATALOG CODES

GS1	-	B	-	C	-	CR	-	E	-	LED1	/	-	UNV	-	H	-	I	-	J		
SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH		LIGHT SOURCE				VOLTAGE		OAH		CONTROL						OPTIONS	

SPECIFY CATALOG CODE

A	B	C	D	E	
SERIES	HANGING SYSTEM	SIZE	DIFFUSER	STANDARD FINISHES	PREMIUM FINISHES
 GS1 GLOWSTICK	P1CF PENDANT WITH SURFACE MOUNT CANOPY, SINGLE SILVER POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS)	14	CR CLEAR ACRYLIC ROD	POWDER COAT FINISHES BKP BLACK BMP BRASS METALLIC BNP BRONZE BTP BLACK TEXTURED GRP GRAPHITE GLP GOLDTASTIC MWP MATTE WHITE SGP STEEL GRAY SMP SILVER METALLIC SWP SKY WHITE WTP WHITE TEXTURED	EVERWOODS POWDER COAT FINISHES (BODY ONLY) WPDP WHITE PINE PNDP PINE CRDP CHERRY TKDP TEAK WLDP WALNUT DLDP DARK WALNUT LWDP LIGHT BARNWOOD DWDP DARK BARNWOOD
	P1FE PENDANT WITH FLAT MATTE WHITE CANOPY, SINGLE SILVER POWER CORD; MOUNTS TO OCL RECESSED J-BOX (PROVIDED BY OCL)	18 24 30 36			

F	G	H	I	J		
LIGHT SOURCE		VOLTAGE	OAH	CONTROL	OPTIONS	
LED OUTPUT LED1	COLOR TEMP (80+ CRI) 27K 30K 35K 40K	COLOR TEMP (90+ CRI) 927K 930K 935K 940K	UNV 120-277	48 100 144	DM1 0-10V DIMMING 1% DM3 LUTRON HI-LUME ECOSYSTEM 1% (LDEI)	HCL HEX CELL LOUVER ULD UL DAMP LABEL BABA BABA COMPLIANCE FOR P1CF HANGING SYSTEM MOD MODIFIED LUMINAIRE (CONTACT LOCAL REP)

SAMPLE CODE: GS1-P1CF-24-CR-WTP-LED1/35K-UNV-48-DM1

*For Minimum OAH, see hanging systems details. Fixture will ship with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height.

Fixtures with **P1FE** hanging system or any **Everwoods** finish, canopy will be **MWP** unless specified; Fixtures with **P1CF** hanging system, canopy will match finish choice.

UP TO **75** LM/W

ALL SIZES		
LED1	LUMENS DELIVERED	825
	SYSTEM WATTAGE	11

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.



Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

MODS, NOTES, & COMMENTS

HANGING SYSTEM

P1CF PENDANT WITH SURFACE MOUNT CANOPY, SINGLE **SILVER** POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS)

MOUNTING INFORMATION CHART		
Fixture Length	Fixture Weight	Min/Max OAH
14"	4 LBS	20/144"
18"	4 LBS	24/144"
24"	5 LBS	30/144"
30"	5 LBS	36/144"
36"	5 LBS	42/144"


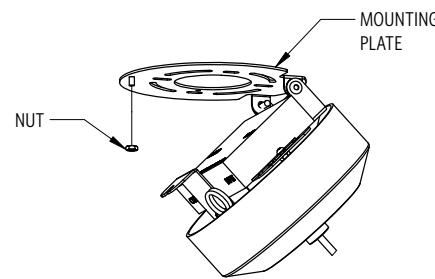
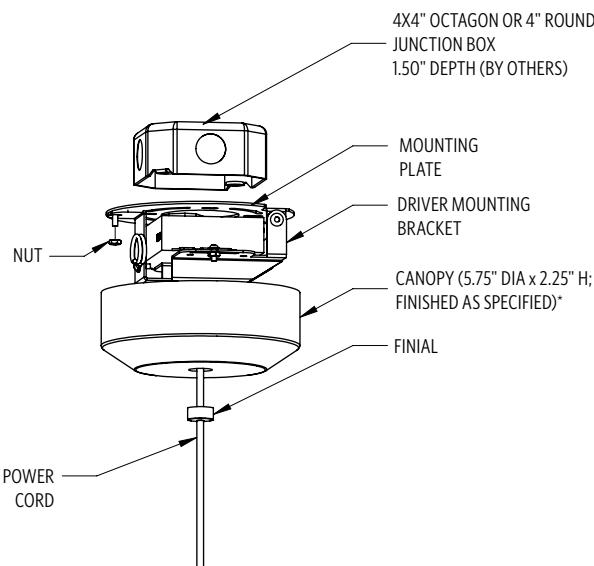


Fixture will ship with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height.

Fixtures with **P1CF** hanging system, canopy will match finish choice; fixtures with any **Everwoods** finish, canopy will be **MWP** unless specified

P1FE PENDANT WITH FLAT MATTE WHITE CANOPY, SINGLE **SILVER** POWER CORD; MOUNTS TO OCL RECESSED J-BOX (PROVIDED BY OCL)

MOUNTING INFORMATION CHART		
Fixture Length	Fixture Weight	Min/Max OAH
14"	4 LBS	17/144"
18"	4 LBS	21/144"
24"	5 LBS	27/144"
30"	5 LBS	33/144"
36"	5 LBS	39/144"



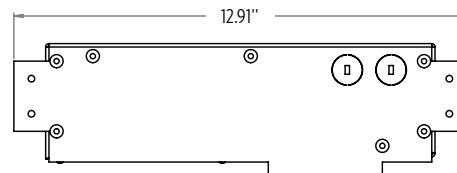

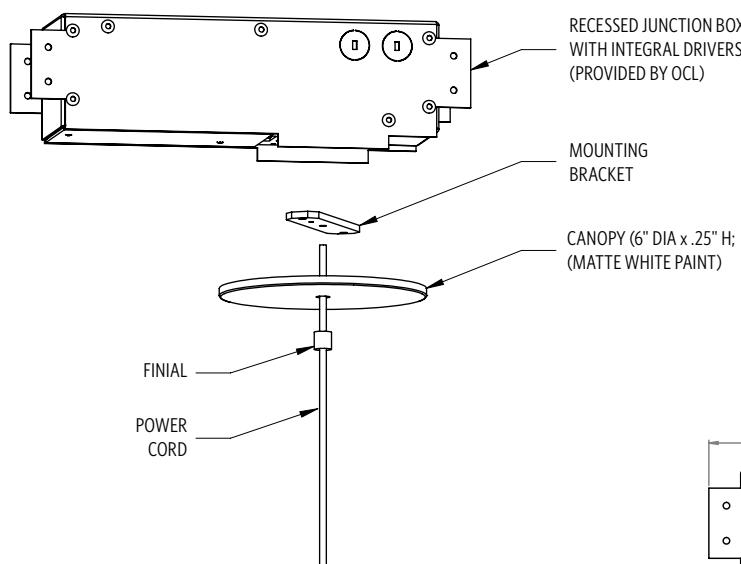


PROFILE VIEW
RECESSED JUNCTION BOX

Fixture will ship with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height.

Fixtures with **P1FE** hanging system or any **Everwoods** finish, canopy will be **MWP** unless specified

SIZE AND SECTIONS

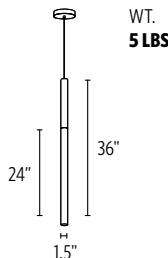


DIFFUSER

ACRYLIC FINISHES:



CR CLEAR ACRYLIC ROD

METALLIC POWDER COAT FINISHES:

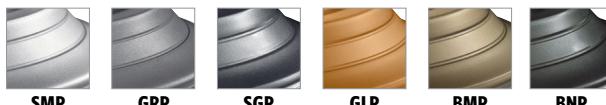

RAL, Pantone® or custom finishes are also available.

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.

FINISH

SOLID POWDER COAT FINISHES:



SWP
SKY WHITE **MWP**
MATTE WHITE **BKP**
BLACK

TEXTURED POWDER COAT FINISHES:



BTP
BLACK TEXTURED **WTP**
WHITE TEXTURED

EVERWOODS POWDER COAT COLLECTION:



WPDP
WHITE PINE **PNDP**
PINE **CRDP**
CHERRY **TKDP**
TEAK **WLDP**
WALNUT **DLDP**
DARK WALNUT **LWDP**
LIGHT BARNWOOD **DWDP**
DARK BARNWOOD

LIGHT SOURCE

ALL SIZES		
LED1	LUMENS DELIVERED	825
	SYSTEM WATTAGE	11

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.


Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

STANDARD COLOR TEMPERATURE OPTIONS	CRI (RA)	
	2700K	80+ 90+
3000K	80+	90+
3500K	80+	90+
4000K	80+	90+

LUMEN MAINTENANCE

REPORTED:	L70 AT >60,000 HRS
CALCULATED:	L70 AT 140,000 HRS
REPORTED:	L90 AT 42,000 HRS
CALCULATED:	L90 AT 42,000 HRS

Derived from EPA TM-21 calculator. Based on typical conditions. Consult the factory for additional details

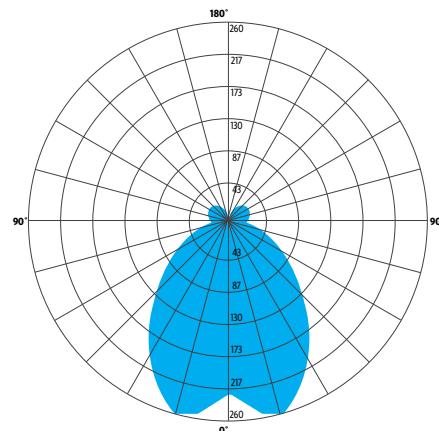

For all available IES files, please visit our website at ocl.com.

ZONE	LUMENS	% OF LUMINAIRE
0-30	215	26%
0-60	520	63%
0-90	655	79%
90-180	175	21%
0-180	825	100%


COMMON MODIFICATIONS

WE'RE BUILT FOR OUT-OF-THE-BOX THINKERS.

Nearly 50% of OCL fixtures we manufacture have some type of modification. Here is a list of common modifications we frequently produce. **Please contact the factory for modifications specific to your fixture or project.**

Need some help? Simply send your questions to us at
OCL-Quotes@ocl.com

- BIOS, TUNABLE WHITE, WARM-DIM, & RGBW LIGHT SOURCES
- SPECIFIC LUMEN OUTPUT
- MODIFIED CLUSTERS OR CONFIGURATIONS / MULTI-DROP CANOPIES
- VARIOUS SHAPES, ARCS, AND CURVES FOR LINEAR PROFILES AND RINGS
- CEILING OR SURFACE MOUNTING
- LARGE SCALE MODIFICATIONS
- RAL, PANTONE, BRAND-SPECIFIC, RETIRED OCL COLOR, OR CUSTOM FINISHES



- EMERGENCY BATTERY BACKUP OR INVERTER OPTIONS
- REMOTE DRIVERS / EXTENDED DISTANCE REMOTE DRIVERS
- DIMMING TO 0.1% (DIM TO DARK)
- NON-STANDARD SIZES OR LENGTHS
- NON-STANDARD CANOPY, BODY AND/OR CORD COLORS
- SEISMIC AND/OR ANTI-SWAY SYSTEMS
- RIGID STEMS
- MODIFIED OVERALL HEIGHTS (LONGER OR SHORTER OAH)
- UPLIGHT ADDITIONS
- LASER ETCHING, ENGRAVING, AND CUTOUTS

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.