





Glowstick™

PENDANT CLUSTER





> FEATURES

- Field replacement for LED array and driver is simple and requires minimal effort.
- Custom configurations are possible.
- Excellent thermal management is achieved through an extruded and machined aluminum fixture body.
- LED luminaire reliability, L70 >80,000 hours at 70% lumen maintenance.
- Fixture and LED light source are tested to LM-79 standards.
- 3 step MacAdam ellipse color binning and 84 CRI standard. 2 step binning and 90+ CRI available [contact factory for details].
- Silver braided power cord 0.125" dia.
- 24 standard powder coat paints offered, however all RAL colors available.
- Contact factory for additional modifications or options.

> MEASUREMENTS

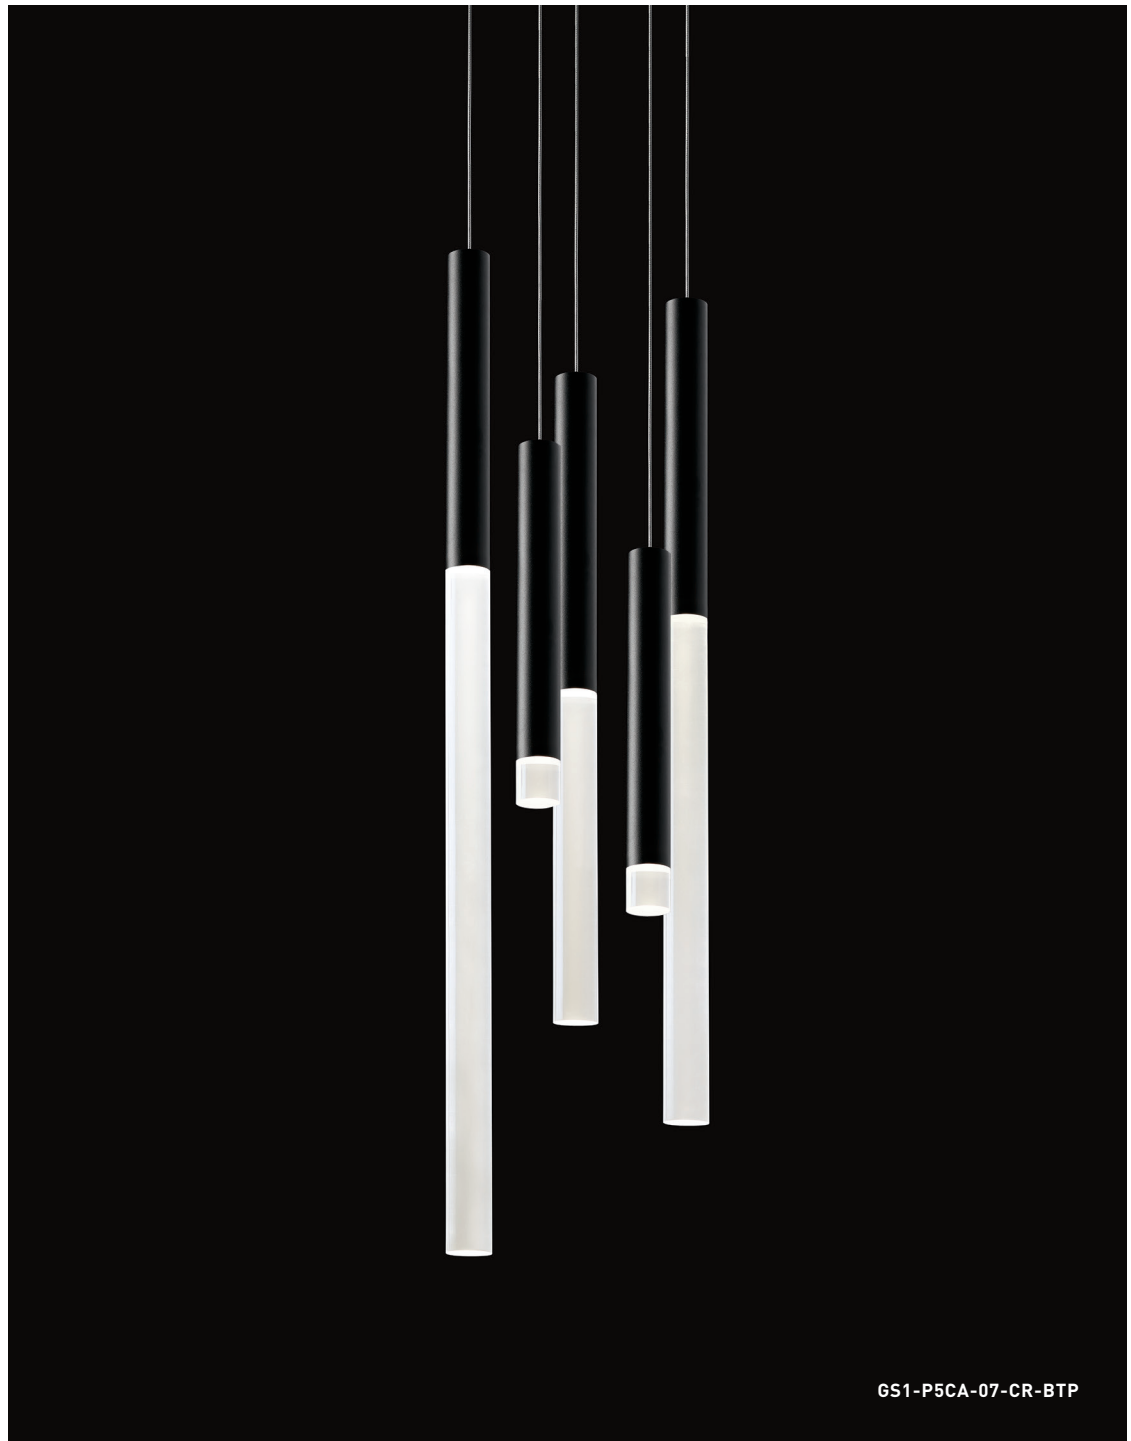

GS1-P5CA-07-CR-BTP

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LIGHT SOURCE		VOLTAGE	OAH	OPTIONS
					LED OUTPUT	COLOR TEMP			
 GS1	P3CA TRIPLE CLUSTER PENDANT WITH 3 SINGLE POWER CORDS 	06	CR CLEAR ACRYLIC ROD	AWP AUTUMN WHITE PAINT BEP BEIGE PAINT BKP BLACK PAINT BLP BLUE PAINT BMP BRASS METALLIC PAINT BNP BRONZE PAINT BTP BLACK TEXTURED PAINT CHP COPPER HAMMERTONE PAINT CMP COPPER METALLIC PAINT DBP DENIM BLUE PAINT GRP GRAPHITE PAINT GTP GRAY TEXTURED PAINT HEP HENNA PAINT KAP KHAKI PAINT LBP LIGHT BRONZE PAINT MWP MATTE WHITE PAINT RHP RESEDA HAMMERTONE PAINT SAP SAGE GREEN PAINT SGP STEEL GRAY PAINT SHP SILVER HAMMERTONE PAINT SMP SILVER METALLIC PAINT SRP STORM GRAY PAINT SWP SKY WHITE PAINT WTP WHITE TEXTURED PAINT	LED OUTPUT LED1	COLOR TEMP 27K 30K 35K 40K	UNV 120-277	SPECIFY IN INCHES	DMO 0-10V DIMMING 10% ULD UL DAMP LABEL HCL HEX CELL LOUVER
	P5CA FIVE CLUSTER PENDANT WITH 5 SINGLE POWER CORDS 	07							
	P7CA SEVEN CLUSTER PENDANT WITH 7 SINGLE POWER CORDS 	08							
✓ SPECIFY CATALOG CODE									
SAMPLE CODE: GS1-P5CA-07-CR-BTP-LED1/35K-UNV-50					^ PHOTOMETRIC INFORMATION AVAILABLE AT WWW.OCL.COM				

> **FIXTURE SPECIFICATIONS**

- Fixture mounts to a standard 4" octagon J-box (supplied by others) and requires additional anchors.
- 16" dia. canopy finished to match fixture.
- 0-10V dimming drivers available. Controls not included.
- Class II LED drivers - 120-277VAC 50/60Hz.
- Typical LED CRI 80+.
- Drivers mounted in canopy.
- Maximum overall height subject to driver specification. Consult factory for details.
- For photometric data, please visit www.ocl.com.

- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.
- All specifications and information subject to change without notice. See submittal for current specifications and information.

> **LIGHT SOURCE PERFORMANCE CHART**

		SIZE		
		6"	7"	8"
LED1	LUMENS DELIVERED	2205	3675	5145
	SYSTEM WATTAGE	33	55	77