




A02-P1EZ-36-MW-GRP

AroTM

PENDANT

> MEASUREMENTS

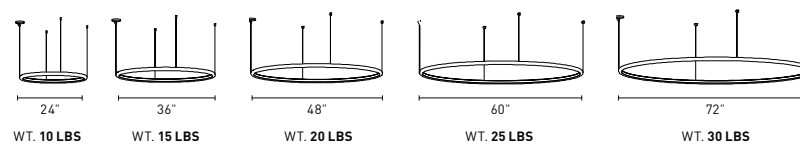






> FEATURES

- Extremely minimal profile size.
- Fixtures can be clustered together to create large scale installations.
- Custom sizes and shapes are possible.
- 3-step LED binning.
- LED reliability L70 > 100,000 hours.
- 24 standard powder coat paints offered. However, all RAL colors available.
- Contact factory for additional modifications or options.



PROFILE VIEW

Ø 1.50"

SERIES	HANGING SYSTEM	SIZE	DIFFUSER	FINISH	LIGHT SOURCE	VOLTAGE	OAH	OPTIONS	
 A02	P1EZ PENDANT WITH ANGLED AIRCRAFT CABLES TO COLLECTOR AND SINGLE AIRCRAFT CABLE FROM COLLECTOR TO CANOPY (REMOTE DRIVER) 	24 36 48 60 72	MW MATTE WHITE ACRYLIC	PREMIUM METAL FINISH BAL BRUSHED ALUMINUM POWDER COAT FINISH AWP AUTUMN WHITE PAINT BEP BEIGE PAINT BKP BLACK PAINT BLP BLUE PAINT BMP BRASS METALLIC PAINT BNP BRONZE PAINT BTP BLACK TEXTURED PAINT CHP COPPER HAMMERTONE PAINT CMP COPPER METALLIC PAINT DBP DENIM BLUE PAINT GRP GRAPHITE PAINT GTP GRAY TEXTURED PAINT HEP HENNA PAINT KAP KHAKI PAINT LBP LIGHT BRONZE PAINT MWP MATTE WHITE PAINT RHP RESEDA HAMMERTONE PAINT SAP SAGE GREEN PAINT SGP STEEL GRAY PAINT SHP SILVER HAMMERTONE PAINT SMP SILVER METALLIC PAINT SRP STORM GRAY PAINT SWP SKY WHITE PAINT WTP WHITE TEXTURED PAINT	LED OUTPUT LED1	COLOR TEMP 27K 30K 35K 40K	UNV 120-277	SPECIFY IN INCHES	DM1 0-10V DIMMING 1% DM3 LUTRON HI-LUME ECOSYSTEM 1%
	P1DE PENDANT WITH ANGLED AIRCRAFT CABLES TO COLLECTOR AND SINGLE AIRCRAFT CABLE FROM COLLECTOR TO CANOPY WITH INTEGRAL DRIVER 								
	P1EM PENDANT WITH VERTICAL AIRCRAFT CABLES TO SEPARATE MOUNTING POINTS AND POWER CORD TO CANOPY (REMOTE DRIVER) 								
	P1DA PENDANT WITH VERTICAL AIRCRAFT CABLES TO SEPARATE MOUNTING POINTS AND POWER CORD TO CANOPY WITH INTEGRAL DRIVER 								
✓ SPECIFY CATALOG CODE									

SAMPLE CODE: A02-P1EZ-36-MW-GRP-LED1/35K-UNV-36

> **FIXTURE SPECIFICATIONS**

- Fixture mounts to standard 4" octagon J-box (supplied by other).
- Fixtures with P1EM hanging system, canopy will be MWP unless specified.
- Fixtures with P1DA, P1DE and P1EZ hanging system, canopy will match finish choice.
- Various types of dimming drivers available, controls not included.
- Class II LED drivers – 120-277VAC 50/60Hz.
- P1EM and P1EZ will include UL listed enclosure for remote mounting drivers. (OCL recommends max 30' distance from fixture for non dimming, DM1 and 10' max remote distance for Lutron.) Enclosure should remain accessible after installation.
- Typical LED CRI 80+.
- For photometric data, please visit www.ocl.com.
- Structural mounting required for fixtures over 50 lbs.
- For specific mounting instructions, please contact factory.
- Five year product warranty.
- All specifications and information subject to change without notice. See submittal for current specifications and information.

> **LIGHT SOURCE PERFORMANCE CHART**

		SIZE				
		24	36	48	60	72
LED1	LUMENS DELIVERED	1950	2930	3910	4890	5860
	SYSTEM WATTAGE	24	34	46	56	68

