



Kwyet™

PENDANT

FEATURES

- AVAILABLE WITH TUNABLE WHITE AND RGBW LIGHT SOURCES
- COMBINATION OF OUR TUBIE™ LUMINAIRE AND SOUND ABSORBING 9MM ACOUSTIC FINS
- 36" DIAMETER WITH CONE, ANGLE, AND ELLIPSE SHAPES
- AVAILABLE IN 80+ CRI AND 90+ CRI (R9>50)
- CHOICE OF DUAL-CIRCUIT PERFORMANCE COB DOWNLIGHT
- WELL BUILDING: CONTRIBUTES TO MEETING WELL™ FEATURES L03, L04, L07 AND S04



CATALOG CODES

| | | | | | | | | | | | |
|--------|----------------|------|----------|----------------|--------------------|-----------|-------------------------|---------|-----|---------|---------|
| A | B | 36 | MW | E | T | G | Y | UNV | J | K | L |
| SERIES | HANGING SYSTEM | SIZE | DIFFUSER | ACOUSTIC COLOR | LIGHT SOURCE: BODY | REFLECTOR | LIGHT SOURCE: DOWNLIGHT | VOLTAGE | OAH | CONTROL | OPTIONS |

| SPECIFY CATALOG CODE | | | | | | | | | | | | | |
|--------------------------------------|---|--|--|--|--|------|----------------|---|--|--|--|---|--|
| A | B | | | | | C | D | E | | | | | |
| SERIES | HANGING SYSTEM | | | | | SIZE | DIFFUSER | ACOUSTIC COLORS | | | | | |
| KW1 ANGLE KW2 CONE KW3 ELLIPSE | STATIC WHITE SURFACE MOUNT | | | | | 36 | MW MATTE WHITE | PBK PURE BLACK CHG CHARCOAL SLT SLATE SDG SHADOW GRAY PIC PEARL ICE CWH CLASSIC WHITE SLG SILVER GRAY NTL NATURAL LINEN HZW HAZELWOOD CFB CORNFLOWER BLUE DNB DENIM BLUE BRD BRICK RED | MNB MIDNIGHT BLUE DPP DEEP PURPLE BRY BERRY CHR CHERRY RED CRT CARROT DWT DEEPWATER PNA PINEAPPLE LMS LIMESTONE EMG EMERALD GREEN BLS BLUSH SFM SEAFOAM | P1FK PENDANT WITH 5.75" SURFACE MOUNT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); INTEGRAL DRIVERS; NOTE: STATIC WHITE WITH NO DOWNLIGHT (ND) | | P1FF PENDANT WITH 8" SURFACE MOUNT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); INTEGRAL DRIVERS; NOTE: STATIC WHITE WITH DOWNLIGHT | |
| | STATIC WHITE, TUNABLE WHITE, OR RGBW FLAT CANOPY MOUNT | | | | | | | | | P1FG PENDANT WITH 5" FLAT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); REMOTE DRIVER ENCLOSURE | | | |

| F | | | G | H | | I | J | K | | L |
|---|--|--|--|--------------------------------------|--------------------------------|--------------------|---|---|---|---|
| LIGHT SOURCE | | | REFLECTOR | LIGHT SOURCE: DOWNLIGHT | | VOLTAGE | CORD & CABLE LENGTH** | CONTROL | | OPTIONS |
| LED OUTPUT LED1 LED2 | COLOR TEMP (80+ CRI) | COLOR TEMP (90+ CRI) | ND NO DOWNLIGHT NF NARROW FLOOD [25 DEGREE] | LED OUTPUT LED1 | COLOR TEMP (80+ CRI) | UNV 120-277 | 48 100 144 | DM1 0-10V DIMMING 1% | BIOS BIOS SKYBLUE™ OR BIOS SKYBLUE™ DYNAMIC LIGHT ENGINE**** | MOD MODIFIED LUMINAIRE (CONTACT LOCAL REP) |
| | 27K 30K 35K 40K | 927K 930K 935K 940K | WF WIDE FLOOD [60 DEGREE] | | | | | | | |
| TWH1 | TUNABLE WHITE 2700K - 5000K CRI 90+; R9 50+ | | | | | | | DMX DMX CONTROL; DIMMABLE TO 0.1% NOTE: REQUIRES P1FG HANGING SYSTEM | | |
| RGBW | RGBW | | | | | | | | | |

SAMPLE CODE (WITH DOWNLIGHT): KW1-P1FF-36-MW-CHG-LED1/27K-NF-LED1/27K-UNV-100-DM1
 SAMPLE CODE (WITHOUT DOWNLIGHT): KW1-P1FK-36-MW-CHG-LED1/27K-ND-UNV-100-DM1



This product meets the material restrictions of Article 4 of the RoHS Directive (2011/65/EU), including Commission Delegated Directive 2015/863

*Body and canopy finish white textured paint (WTP) standard; power cord white unless specified; additional colors possible; contact your local rep for availability and lead times



**For minimum CCL, see hanging systems details. Fixture will ship with one of three standard CCL's (48", 100" or 144") field adjustable to the desired height

***Contact factory for BIOS SkyBlue® or BIOS SkyBlue® Dynamic light engine and control options.

MODS, NOTES, & COMMENTS

HANGING SYSTEM

P1FK PENDANT WITH 5.75" SURFACE MOUNT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); INTEGRAL DRIVER; **NOTE:** STATIC WHITE WITH NO DOWNLIGHT

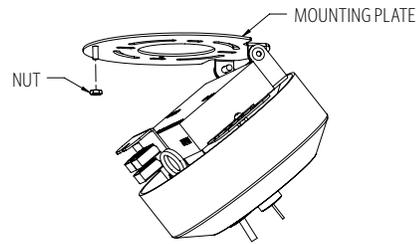
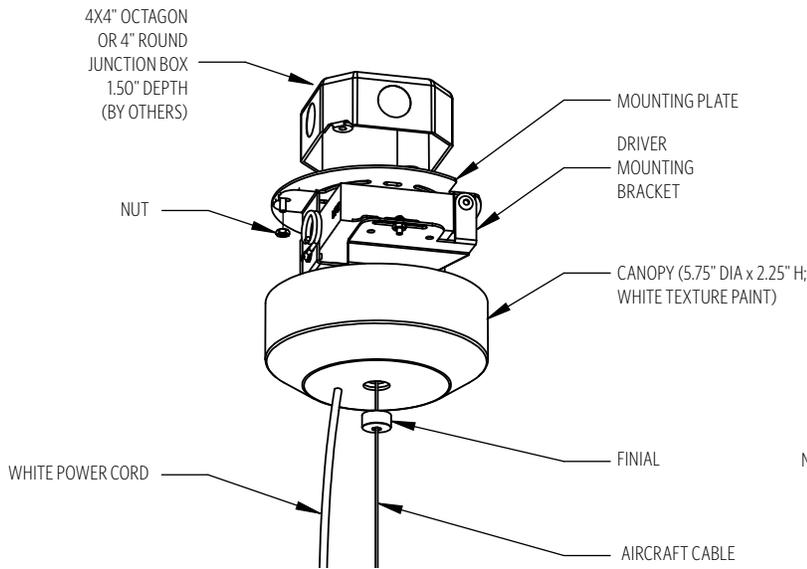


MOUNTING INFORMATION CHART

| SERIES | LUMINAIRE SIZE | LUMINAIRE WEIGHT | MIN/MAX OAH |
|--------|----------------|------------------|-------------|
| KW1 | 36 | 9 LBS | 32/166" |
| KW2 | 36 | 10 LBS | 32/166" |
| KW3 | 36 | 9LBS | 32/166" |

P1FK ships with one of three CCL's (48", 100" or 144") and is field adjustable to the desired height.

P1FF PENDANT WITH 8" SURFACE MOUNT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); INTEGRAL DRIVERS; **NOTE:** STATIC WHITE WITH DOWNLIGHT ONLY

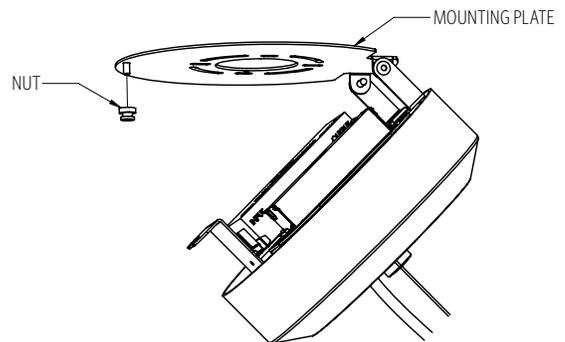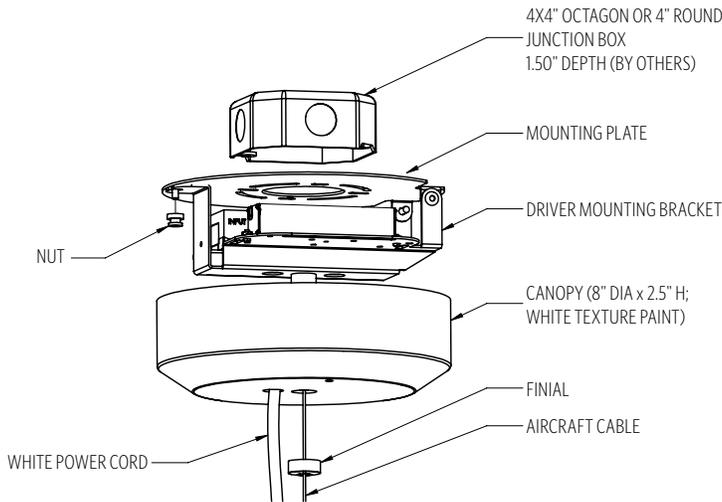


MOUNTING INFORMATION CHART

| SERIES | LUMINAIRE SIZE | LUMINAIRE WEIGHT | MIN/MAX OAH |
|--------|----------------|------------------|-------------|
| KW1 | 36 | 9 LBS | 32/166" |
| KW2 | 36 | 10 LBS | 32/166" |
| KW3 | 36 | 9LBS | 32/166" |

P1FF ships with one of three CCL's (48", 100" or 144") and is field adjustable to the desired height.


P1FG PENDANT WITH 5" FLAT CANOPY, SINGLE CENTER AIRCRAFT CABLE AND WHITE POWER CORD; MOUNTS TO 4X4 OCTAGON J-BOX (BY OTHERS); REMOTE DRIVER ENCLOSURE

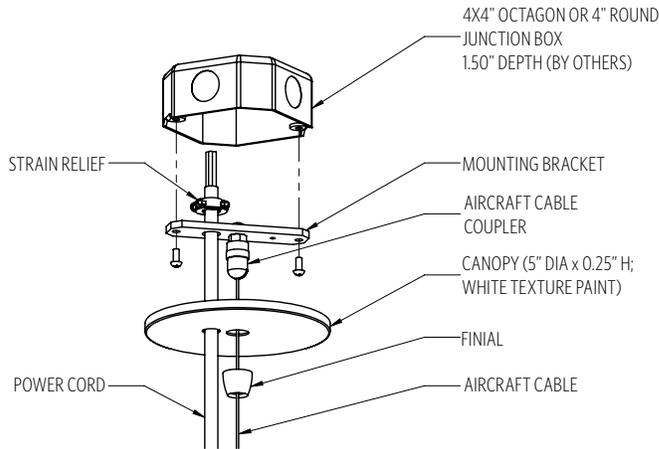


MOUNTING INFORMATION CHART

| SERIES | LUMINAIRE SIZE | LUMINAIRE WEIGHT | MIN/MAX OAH |
|--------|----------------|------------------|-------------|
| KW1 | 36 | 9 LBS | 30/166" |
| KW2 | 36 | 10 LBS | 30/166" |
| KW3 | 36 | 9 LBS | 30/166" |

P1FG ships with one of three CCL's (48", 100" or 144") and is field adjustable to the desired height.
 P1FG will include ETL listed enclosure for remote mounting drivers. Max 30' distance from luminaire for **DM1, DM8, DALI** and **DMX**. Enclosure must remain accessible after installation.

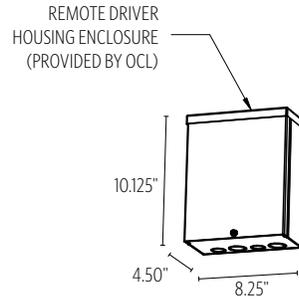

SIZES

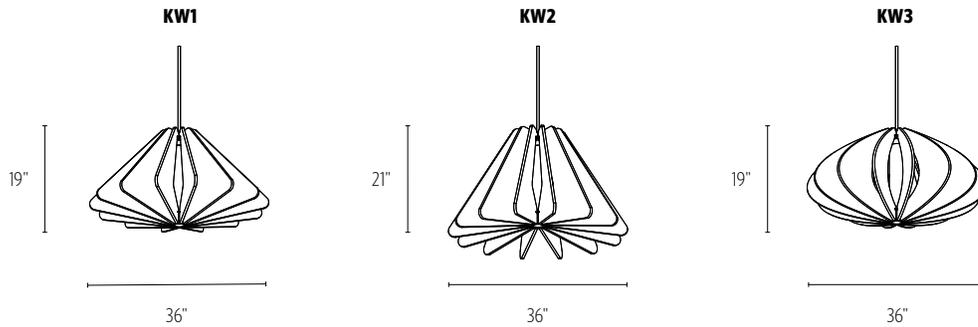

DIFFUSER

ACRYLIC FINISHES:



MW
MATTE WHITE

TEXTURED POWDER COAT FINISHES:



WTP
WHITE TEXTURED

RAL®, Pantone® or custom finishes are also available.

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.

FINISHES & MATERIALS

ACOUSTIC COLORS:

| | | | | | | |
|-----------------------------|--------------------------|-------------------------------|---------------------------|-------------------------|-----------------------------|-----------------------------|
| PBK PURE BLACK | CHG CHARCOAL | SLT SLATE | SDG SHADOW GRAY | PIC PEARL ICE | CWH CLASSIC WHITE | SLG SILVER GRAY |
| NTL NATURAL LINEN | HZW HAZELWOOD | CFB CORNFLOWER BLUE | DNB DENIM BLUE | BRD BRICK RED | MNB MIDNIGHT BLUE | DPP DEEP PURPLE |
| BRY BERRY | CHR CHERRY RED | CRT CARROT | DWT DEEPWATER | PNA PINEAPPLE | LMS LIMESTONE | EMG EMERALD GREEN |
| BLS BLUSH | SFM SEAFOAM | | | | | |

LIGHT SOURCE

| LUMENS AND WATTAGE CHART | | BODY | DOWNLIGHT | |
|--------------------------|------------------|---------|-----------|------|
| | | 36" | NF | WF |
| LED1 | LUMENS DELIVERED | 550 | 1525 | 1495 |
| | SYSTEM WATTAGE | 6 | 15 | 15 |
| LED2 | LUMENS DELIVERED | 820 | N/A | N/A |
| | SYSTEM WATTAGE | 9 | N/A | N/A |
| TWH1 | LUMENS DELIVERED | 550 | N/A | N/A |
| | SYSTEM WATTAGE | 6 | N/A | N/A |
| RGBW | LUMENS DELIVERED | PENDING | N/A | N/A |
| | SYSTEM WATTAGE | PENDING | N/A | N/A |

| STANDARD COLOR TEMPERATURE OPTIONS | CRI (RA) | |
|------------------------------------|----------|-----|
| | 2700K | 80+ |
| 3000K | 80+ | 90+ |
| 3500K | 80+ | 90+ |
| 4000K | 80+ | 90+ |
| TWH1 | 90+ | |
| RGBW | N/A | |


| ZONE | LUMENS | % OF LUMINAIRE |
|--------|--------|----------------|
| 0-30 | 16 | 2% |
| 0-60 | 126 | 17% |
| 0-90 | 360 | 49% |
| 90-180 | 360 | 51% |
| 0-180 | 734 | 100% |

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp. Wattage and lumen data for **TWH1** approx. pending LM-79 testing.; contact factory for **RGBW**.


Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

PHOTOMETRY:


LUMINAIRE: KW3-PIFK-36-MW-WTP-CHG-LED2_35K-ND-UNV-36-DM
 COLOR TEMP #: 3500K
 EFFICACY: 92 LM/W
 TEST REPORT: TEST NO. 20865.0

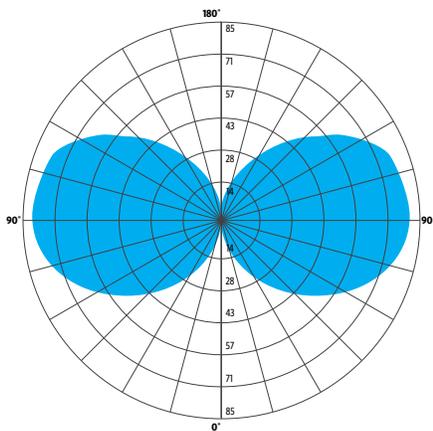

BODY

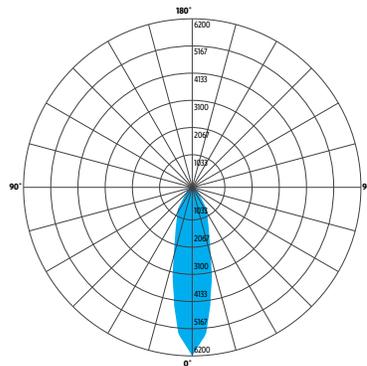


NARROW FLOOD (NF)

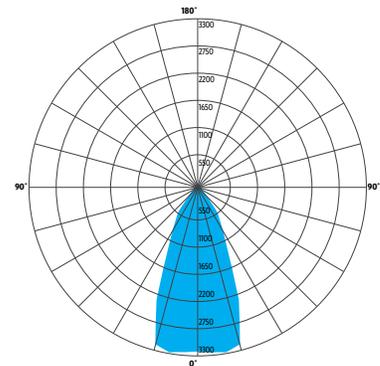

WIDE FLOOD (WF)

ACOUSTICAL TESTING

KWYET ACOUSTIC PERFORMANCE (4 UNITS):

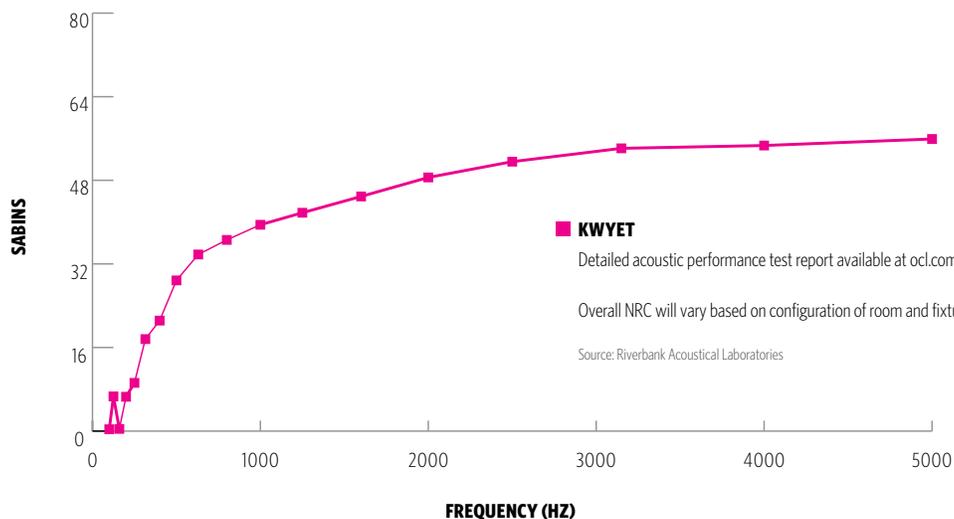

CONTROL

DM1 0-10V DIMMING 1%

- 0-10V DIMMING PROTOCOL
- 1% MINIMUM DIM LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MINIMUM AMBIENT OPERATING TEMPERATURE -31°F
- LINEAR DIMMING CURVE
- FIELD REPLACEABLE

DALI DALI CONTROL SYSTEM, DIMMABLE 0.1%

- DALI-2 DEVICE TYPE 6 CONTROL PROTOCOL
- 0.1% MINIMUM DIM LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MINIMUM AMBIENT OPERATING TEMPERATURE -4°F
- LOGARITHMIC DIMMING CURVE [DEFAULT]
- FIELD REPLACEABLE

DMX DMX CONTROL DIMMABLE TO 0.1%

- DMX/RDM DIMMING PROTOCOL
- 0.1% MINIMUM DIM LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MINIMUM AMBIENT OPERATING TEMPERATURE -4°F
- LOGARITHMIC DIMMING CURVE [DEFAULT]
- FIELD REPLACEABLE

DM8 DUAL 0-10V DIMMING 0.1%

- 0-10V DIMMING PROTOCOL
- 0.1% MINIMUM DIM LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MINIMUM AMBIENT OPERATING TEMPERATURE -4°F
- LOGARITHMIC DIMMING CURVE [DEFAULT]
- FIELD REPLACEABLE

OPTIONS

MOD MODIFIED LUMINAIRE

- LUMINAIRE IS MODIFIED FROM STANDARD OPTIONS; CONTACT LOCAL REP FOR MORE INFORMATION

BIOS

- BIOS SKYBLUE™ DYNAMIC** LIGHT ENGINE IS DIMMABLE AND FEATURES A SIMPLE APPROACH TO CIRCADIAN LIGHTING CONTROLS.
- WHEN PAIRED WITH THE BIOS BIO-DIMMING MODULE, IT OPERATES USING ANY SINGLE CHANNEL CONSTANT CURRENT (CC) LED DRIVER AND CAN BE USED WITH ANY STANDARD DIMMING INTERFACE/PROTOCOL (0-10V, ELV, DMX, WIRELESS) AND COULD WORK WITH EXISTING TWO-CHANNEL CONTROL SYSTEMS AS WELL.
- VISIT OCL.COM/BIOS FOR MORE INFORMATION

SPECIFICATIONS

CONSTRUCTION

- LED MOUNTING CHANNEL EXTRUDED ALUMINUM
- DIFFUSER IS EXTRUDED FROSTED ACRYLIC
- BODY TOP/BOTTOM CAPS ARE DIE-CAST ALUMINUM
- CANOPY IS SPUN ALUMINUM
- HARDWARE IS ZINC PLATED OR STAINLESS STEEL

MOUNTING

- MOUNTS TO 4X4" OCTAGON OR 4" ROUND J-BOX (BY OTHER)

ELECTRICAL

- DIMMING ELECTRONIC DRIVER(S), COMES STANDARD WITH 0-10V DOWN TO 1% [STATIC WHITE]
- OCL PROPRIETARY LED ARRAYS USE NICHIA 757 DIODES [BODY LIGHT] STATIC WHITE
- BRIDGELUX V13 GEN 7 COB [DOWNLIGHT]
- FOR INTEGRAL DRIVERS:** LUMINAIRE CONNECTS TO BUILDING SUPPLY (120V-277V 50/60HZ)
- FOR REMOTE DRIVERS:** LUMINAIRE WIRE LEADS ARE LOW-VOLTAGE. THE WIRES SHOULD BE CONNECTED TO OCL PROVIDED REMOTE DRIVER ENCLOSURE ONLY!

ACOUSTIC PANEL

- AFFIXED ACOUSTIC PANEL AIDS IN THE REDUCTION OF SOUND REFLECTIONS, REVERBERATION, AND ECHO
- ASTM E-84 CLASS A / CAN ULC S102 FLAME SPREAD: 0 | SMOKE DEVELOPMENT INDEX: 300
- 9MM 100% POLYESTER FIBER PANEL WITH A MINIMUM 50% POST-CONSUMER RECYCLED MATERIAL (PET)
- ACOUSTIC PERFORMANCE (ASTM C423) TEST REPORT AVAILABLE AT OCL.COM
- VARIATIONS IN FIBER MIX AND COLOR MAY OCCUR. ALL PRODUCTS WILL BE SUPPLIED WITHIN COMMERCIAL TOLERANCES
- CARE & CLEANING:** REMOVE DUST AND DEBRIS WITH A CLEAN, SOFT, LINT-FREE CLOTH OR VACUUM

LISTING

- ETL LISTED TO UL 1598 FOR DRY LOCATIONS

WARRANTY

- 5 YEAR; ALL ELECTRICAL COMPONENTS RETAIN THE MANUFACTURER'S WARRANTY

BUILD AMERICA, BUY AMERICA (BABA)

- THIS PRODUCT MEETS THE GUIDELINES FOR THE BUILD AMERICA, BUY AMERICA ACT. **SOME EXCLUSIONS APPLY.** FOR MORE INFORMATION AND A FULL LIST OF ELIGIBLE SKUS, VISIT OCL.COM/BABA

SUSTAINABILITY

- THIS PRODUCT MEETS THE MATERIAL RESTRICTIONS OF ARTICLE 4 OF THE **ROHS** DIRECTIVE (2011/65/EU), INCLUDING COMMISSION DELEGATED DIRECTIVE 2015/863
- BIOS** LIGHTING CONTRIBUTES TOWARD THE CIRCADIAN LIGHTING DESIGN FEATURE 54 UNDER THE **WELL BUILDING STANDARD™ V1** AND FEATURE L03 UNDER THE **WELL BUILDING STANDARD V2**

SAFETY REGULATIONS

- CAN BE USED FOR **TITLE 24 PART 6** AND **JA8-2016E** COMPLIANCE — CONTACT YOUR REP FOR HELP WITH YOUR PROJECT REQUIREMENTS AND LUMINAIRE SPECIFICATION

COMMON MODIFICATIONS

WE'RE BUILT FOR OUT-OF-THE-BOX THINKERS.

Nearly 50% of OCL fixtures we manufacture have some type of modification. Here is a list of common modifications we frequently produce. **Please contact the factory for modifications specific to your fixture or project**

Need some help? Simply send your questions to us at OCL-Quotes@ocl.com

- BIOS, TUNABLE WHITE, WARM-DIM, & RGBW LIGHT SOURCES
- SPECIFIC LUMEN OUTPUT
- MODIFIED CLUSTERS OR CONFIGURATIONS / MULTI-DROP CANOPIES
- VARIOUS SHAPES, ARCS, AND CURVES FOR LINEAR PROFILES AND RINGS
- CEILING OR SURFACE MOUNTING
- LARGE SCALE MODIFICATIONS
- RAL, PANTONE, BRAND-SPECIFIC, RETIRED OCL COLOR, OR CUSTOM FINISHES



- EMERGENCY BATTERY BACKUP OR INVERTER OPTIONS
- REMOTE DRIVERS / EXTENDED DISTANCE REMOTE DRIVERS
- DIMMING TO 0.1% (DIM TO DARK)
- NON-STANDARD SIZES OR LENGTHS
- NON-STANDARD CANOPY, BODY AND/OR CORD COLORS
- SEISMIC AND/OR ANTI-SWAY SYSTEMS
- RIGID STEMS
- MODIFIED OVERALL HEIGHTS (LONGER OR SHORTER OAH)
- UPLIGHT ADDITIONS
- LASER ETCHING, ENGRAVING, AND CUTOUTS

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.