




Glowring™

PENDANT/CEILING/RECESSED CEILING

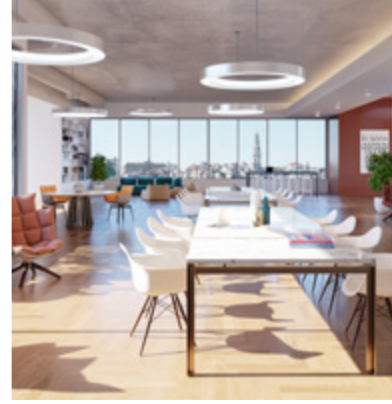

Glowring™

PENDANT/CEILING/RECESSED CEILING



> Features

- Pendant available with acoustic panel option
- One-piece molded diffuser with no visible seams
- Diffuser easily cleaned and maintained — great for hospitality, healthcare and schools
- Delivers up to 105 lumens per watt without LED imaging or glare
- Fully enclosed top surface to minimize accumulation of dust and debris
- Minimal fixture cross section size
- Available with metal trim on inner diameter or outer diameter (pendant & ceiling)
- Fixtures can be clustered together to create large scale installations
- Field replaceable LEDs and drivers
- 3 step LED binning
- Various types of dimming drivers available, controls not included
- Class II LED drivers - 120-277VAC 50/60Hz
- Typical LED CRI 80+
- For photometric data, please visit www.ocl.com
- Structural mounting required for fixtures over 50 lbs
- For specific mounting instructions, please contact factory
- Five year product warranty

- > All specifications and information subject to change without notice. See specification sheet for technical details. Contact factory for additional modifications or options.

Sample fixture provided with dimming switch to show LED1 and LED2 outputs, and no hanging system.

