




Glowball™ Cluster

PENDANT

FEATURES

- ELEGANT & CONTEMPORARY SPHERE
- ROBUST FROSTED SILICONE OUTER DIFFUSER; ACRYLIC INNER DIFFUSER
- 3, 5, AND 7 DROPS AVAILABLE
- CUSTOM CONFIGURATIONS ARE POSSIBLE
- 3 STEP LED BINNING
- DIE-CAST ALUMINUM BODY
- FIELD REPLACEABLE LEDS AND DRIVERS
- AVAILABLE IN 80+ CRI AND 90+ CRI (R9>50)



CATALOG CODES

| | | | | | | | | | | | | | | | | | | |
|------------|---|----------------|---|----------|---|-----------|---|----------|---|--------------|---|------------|---|----------|---|------------|---|----------|
| GB1 | - | B | - | C | - | FS | - | E | - | LED1 | - | UNV | - | H | - | DM1 | - | J |
| SERIES | | HANGING SYSTEM | | SIZE | | DIFFUSER | | FINISH | | LIGHT SOURCE | | VOLTAGE | | OAH | | CONTROL | | OPTIONS |

| SPECIFY CATALOG CODE | | A | B | C | D | E | |
|-------------------------|-------------|--|----------------|----------------------------|-------------------------------|----------------------------|------------------------|
| | | SERIES | HANGING SYSTEM | SIZE | DIFFUSER | FINISH | |
| GB1 GLOWBALL | P3CA | TRIPLE CLUSTER PENDANT WITH 3 SINGLE POWER CORDS | 06 | FS FROSTED SILICONE | POWDER COAT FINISHES | | |
| | P5CA | FIVE CLUSTER PENDANT WITH 5 SINGLE POWER CORDS | | | 07 | BKP BLACK | MWP MATTE WHITE |
| | P7CA | SEVEN CLUSTER PENDANT WITH 7 SINGLE POWER CORDS | | | 08 | BMP BRASS METALLIC | SGP STEEL GRAY |
| | | | | | BNP BRONZE | SMP SILVER METALLIC | |
| | | | | | BTP BLACK TEXTURED | SWP SKY WHITE | |
| | | | | | GRP GRAPHITE | WTP WHITE TEXTURED | |
| | | | | | GLP GOLDTASTIC | | |
| | | | | | PREMIUM METAL FINISHES | | |
| | | | | | BAL BRUSHED ALUMINUM | | |

| F | | | G | H | I | J |
|-------------------|-------------------|-------------------|--------------------|---------------------------------------|-----------------------------|--|
| LIGHT SOURCE | | | VOLTAGE | OAH* | CONTROL | OPTIONS |
| LED OUTPUT | COLOR TEMP | COLOR TEMP | UNV 120-277 | 48 100 144 | DM1 0-10V DIMMING 1% | ULD UL DAMP LABEL BIOS BIOS SKYBLUE™ OR BIOS SKYBLUE™ DYNAMIC LIGHT ENGINE** MOD MODIFIED LUMINAIRE (CONTACT LOCAL REP) |
| LED1 | (80+ CRI) | (90+ CRI) | | | | |
| | 27K | 927K | | | | |
| | 30K | 930K | | | | |
| | 35K | 935K | | | | |
| | 40K | 940K | | | | |

SAMPLE CODE: GB1-P3CA-06-FS-BTP-LED1/35K-UNV-44-DM1

*For minimum OAH, see hanging systems details. Fixture will ship with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height

**Contact factory for BIOS SkyBlue® or BIOS SkyBlue® Dynamic light engine and control options.

UP TO **75** LM/W

| | | 06 | 07 | 08 |
|-------------|------------------|-----------|-----------|-----------|
| LED1 | LUMENS DELIVERED | 1950 | 3250 | 4550 |
| | SYSTEM WATTAGE | 24 | 40 | 56 |

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.

Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

MODS, NOTES, & COMMENTS

HANGING SYSTEM


- P3CA** TRIPLE CLUSTER PENDANT WITH 3 SINGLE POWER CORDS
- P5CA** FIVE CLUSTER PENDANT WITH 5 SINGLE POWER CORDS
- P7CA** SEVEN CLUSTER PENDANT WITH 7 SINGLE POWER CORDS

MOUNTING INFORMATION CHART


| LUMINAIRE | LUMINAIRE WEIGHT | MOUNTING POINTS | MIN/MAX OAH |
|-----------|------------------|-----------------|-------------|
| 06 | 15 LBS | 1 | 40/144" |
| 07 | 20 LBS | 1 | 40/144" |
| 08 | 35 LBS | 1 | 44/144" |

Canopy requires additional anchors (by others)


For minimum OAH, see hanging systems details. Fixture will ship with one of three standard OAH's (48", 100" or 144") field adjustable to the desired height

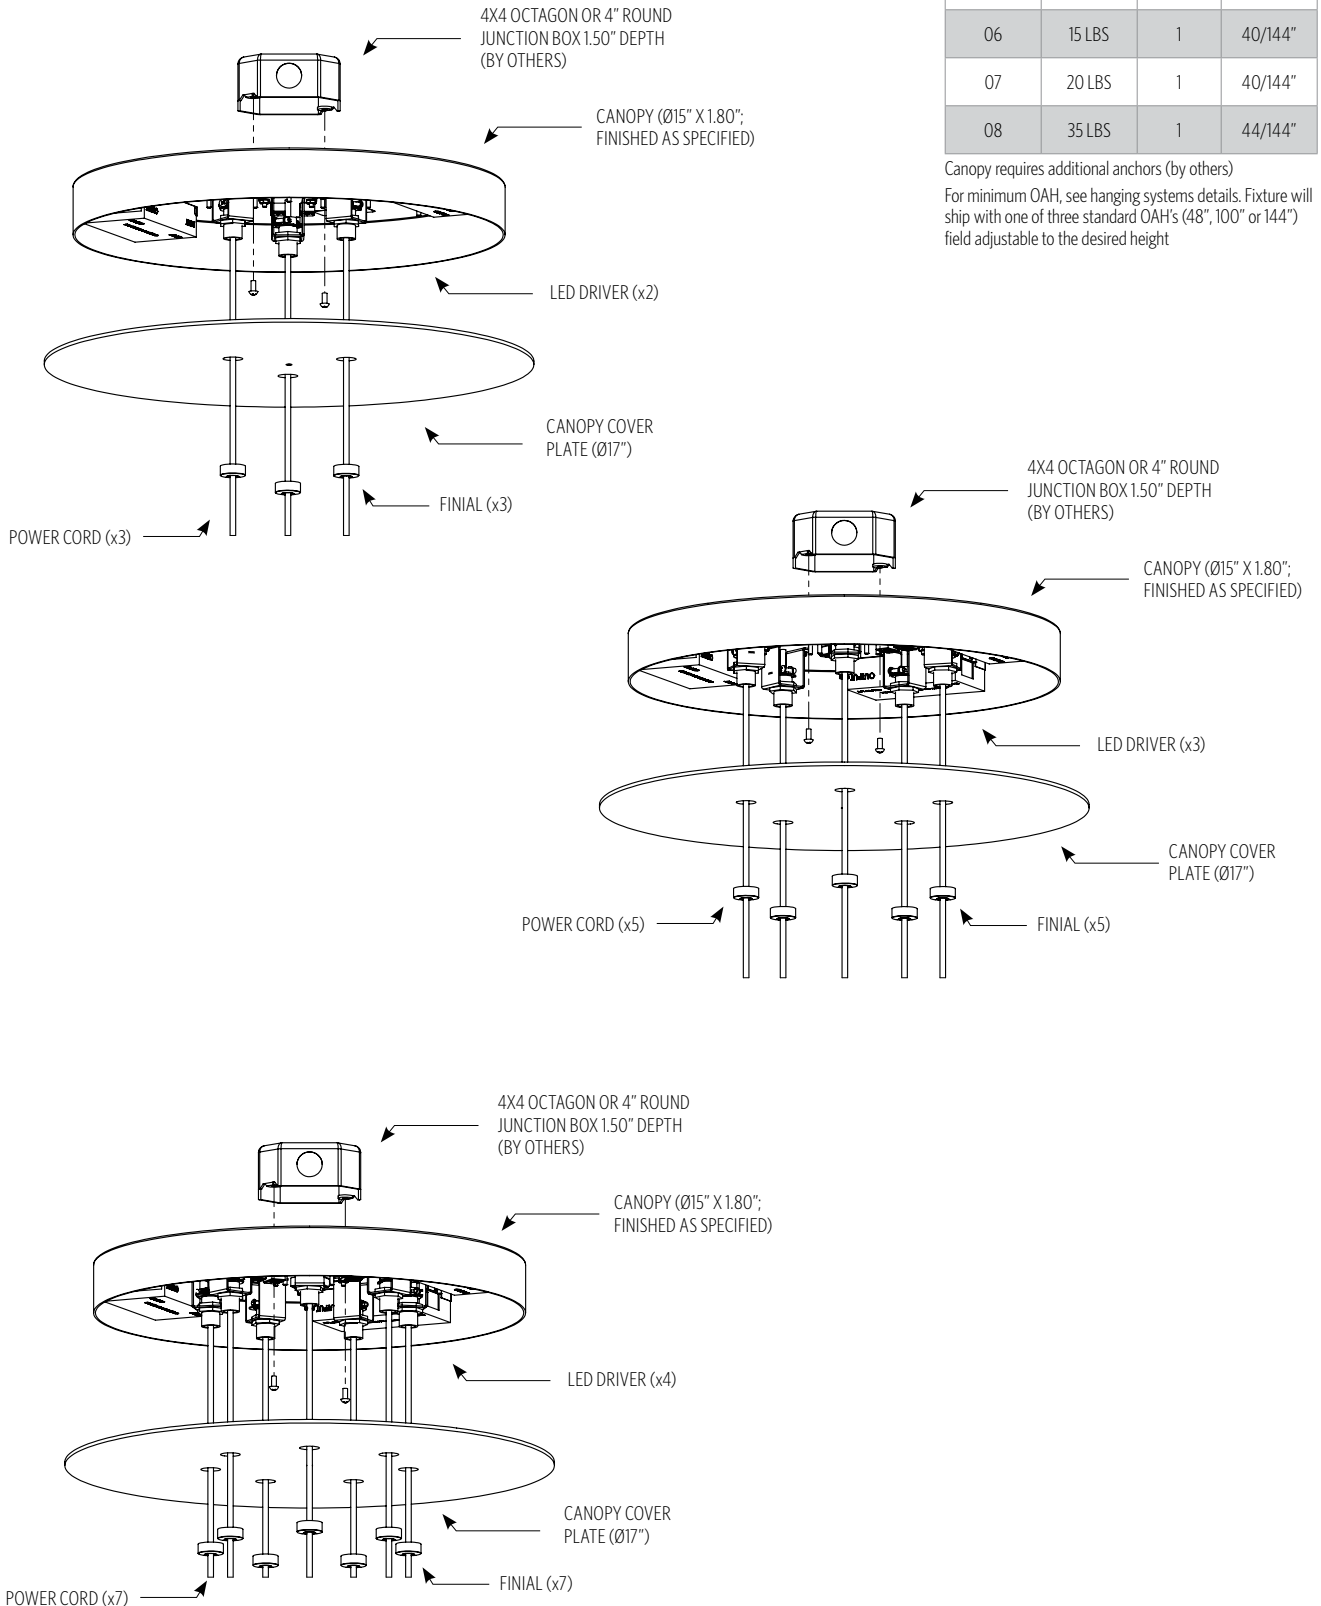


SIZE AND SECTIONS



WT.
15 LBS



WT.
20 LBS



WT.
35 LBS

DIFFUSER

FINISHES:



FS FROSTED SILICONE

FINISH

METALLIC POWDER COAT FINISHES:



SMP
SILVER



GRP
GRAPHITE



SGP
STEEL GRAY



GLP
GOLDTASTIC



BMP
BRASS



BNP
BRONZE

PREMIUM METAL FINISHES:



BAL
BRUSHED
ALUMINUM

SOLID POWDER COAT FINISHES:



SWP
SKY WHITE



MWP
MATTE
WHITE



BKP
BLACK

TEXTURED POWDER COAT FINISHES:



BTP
BLACK
TEXTURED



WTP
WHITE
TEXTURED

RAL®, Pantone® or custom finishes are also available.

These colors are for reference only. Please be aware that colors may vary per monitor. Contact your local rep for finish samples or with any questions.

LIGHT SOURCE

| | | 06 | 07 | 08 |
|-------------|------------------|------|------|------|
| LED1 | LUMENS DELIVERED | 1950 | 3250 | 4550 |
| | SYSTEM WATTAGE | 24 | 40 | 56 |

This chart was created for a 35K color temp. Multiply by 0.95 for 27k color temp, 0.97 for 30k color temp, and 1.03 for 40k color temp.

Values shown for 80+ CRI. For 90+ CRI lumens use 0.85 multiplier.

| STANDARD COLOR TEMPERATURE OPTIONS | CRI (RA) | |
|---------------------------------------|----------|-----|
| | 2700K | 80+ |
| 3000K | 80+ | 90+ |
| 3500K | 80+ | 90+ |
| 4000K | 80+ | 90+ |

****PHOTOMETRIC INFORMATION PENDING****

CONTROL

DM1 0-10V DIMMING 1%

- 0-10V DIMMING
- 1% MINIMUM DIM LEVEL
- ELECTRONIC DRIVER
- POWER FACTOR >0.9
- THD <20%
- MINIMUM AMBIENT OPERATING TEMPERATURE -31°F
- FIELD REPLACEABLE

OPTIONS

ULD DAMP LABEL LUMINAIRE

- MAY BE USED IN AN OUTDOOR AREA THAT IS PROTECTED FROM DIRECT CONTACT WITH WIND, RAIN, SNOW OR EXCESSIVE MOISTURE

MOD MODIFIED LUMINAIRE

- LUMINAIRE IS MODIFIED FROM STANDARD OPTIONS; CONTACT LOCAL REP FOR MORE INFORMATION

BIOS

- BIOS SKYBLUE™ DYNAMIC** LIGHT ENGINE IS DIMMABLE AND FEATURES A SIMPLE APPROACH TO CIRCADIAN LIGHTING CONTROLS.
- WHEN PAIRED WITH THE BIOS BIO-DIMMING MODULE, IT OPERATES USING ANY SINGLE CHANNEL CONSTANT CURRENT (CC) LED DRIVER AND CAN BE USED WITH ANY STANDARD DIMMING INTERFACE/PROTOCOL (0-10V, ELV, DMX, WIRELESS) AND COULD WORK WITH EXISTING TWO-CHANNEL CONTROL SYSTEMS AS WELL.
- VISIT [OCL.COM/BIOS](https://www.oclighting.com/BIOS) FOR MORE INFORMATION

SPECIFICATIONS

CONSTRUCTION

- HOUSING IS DIE-CAST ALUMINUM
- DIFFUSER IS FROSTED SILICONE
- CANOPY IS SPUN ALUMINUM
- HARDWARE IS ZINC PLATED OR STAINLESS STEEL

MOUNTING

- P3CA, P5CA, P7CA ALL MOUNT TO 4X4" OCTAGON OR 4" ROUND J-BOX (BY OTHERS)

ELECTRICAL

- DIMMING ELECTRONIC DRIVER(S), COMES STANDARD WITH 0-10V DOWN TO 1%
- BRIDGELUX VERO 10 GEN 6 COB
- 80+ CRI = 80 RA, R9 > 0 (10-15 TYP.)
- 90+ CRI = 90 RA, R9 > 50
- LUMINAIRE CONNECTS TO BUILDING SUPPLY (120V-277V 50/60HZ) UNLESS DRIVERS ARE REMOTE

LISTING

- ETL LISTED TO UL 1598 FOR DRY LOCATIONS, DAMP LOCATION LISTED IS OPTION

WARRANTY

- 5 YEAR; ALL ELECTRICAL COMPONENTS RETAIN THE MANUFACTURER'S WARRANTY

SUSTAINABILITY

- DECLARE:** DECLARE IS AN INGREDIENT LABEL DISCLOSURE FOR BUILDING PRODUCTS THAT IS DESIGNED TO HELP SPECIFIERS QUICKLY IDENTIFY PRODUCTS THAT SUPPORT HUMAN AND ENVIRONMENTAL HEALTH. LEARN MORE AT [OCL.COM/DECLARE](https://www.oclighting.com/DECLARE)
- THIS PRODUCT MEETS THE MATERIAL RESTRICTIONS OF ARTICLE 4 OF THE **ROHS** DIRECTIVE (2011/65/EU), INCLUDING COMMISSION DELEGATED DIRECTIVE 2015/863
- BIOS** LIGHTING CONTRIBUTES TOWARD THE CIRCADIAN LIGHTING DESIGN FEATURE 54 UNDER THE **WELL BUILDING STANDARD™ V1** AND FEATURE L03 UNDER THE **WELL BUILDING STANDARD V2**

DECLARE

Final assembly location
Where was the product made?

Chemical ingredients
What is in this product?

Red List compliance
Are there Red List ingredients in this product?

Declare.

**Glowball
OCL Architectural Lighting**

Final Assembly: St. Louis, Missouri, USA
Life Expectancy: 10 Year(s)
End of Life Options: Recyclable (78), Landfill (22)

Ingredients:
Small Electrical Component¹; Aluminum; Steel; Steel manufacture, chemicals; Cadmium; Quartz; Dimethicone; Siloxanes and Silicones, di-Me, reaction products with silica; Zinc; Aluminum hydroxide; Iron; Distillates (petroleum), hydrotreated heavy naphthenic; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Calcium carbonate; Trimethoxy(methyl)silane; Copper; Vinyl silicone polymer; Nickel (Metallic); Silica, [(ethoxydimethylsilyloxy)- and [(trimethylsilyloxy)-modified; Nylon 6; Silicic acid (H4SiO4), tetraethyl ester; reaction products with chlorodimethylsilane; Tin; Organic; Poly(trimino-1,6-dioxo-1,6-hexanediylo)mino-1,6-hexanediylo]

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

OCL-0003
 EXP: 01 OCT 2024
 Original Issue Date: 2023

THIRD PARTY VERIFIED

FORMERLY THE LIVING FUTURE INSTITUTE™ (OCL) GLOBAL SERVICES
 INTERNATIONAL LIVING FUTURE INSTITUTE™ [livingfuture.org/declare](https://www.livingfuture.org/declare)

Life expectancy + end of life options
How long will this product last + what do you do with it when you're done with it?

VOC info
Does this product off-gas?

DECLARE: PRODUCT TRANSPARENCY IN MANUFACTURING

Declare is the only label that combines material transparency and the Red List. It distills complex chemical ingredient information into an easy to read label. Declare helps specifiers find Red List Free products, which are healthy for people, the environment, and communities.

A product's compliance with the LBC Red List is represented on the Declare® label by the product's Declaration Status. There are three Declaration Statuses:

- DECLARED (RLD)** products disclose 100% of ingredients present in the final product, but contain one or more Red List chemicals that are not covered by an approved exception.
- LBC RED LIST APPROVED (RLA)** products disclose a minimum of 99% of ingredients present in the final product and meet the LBC Red List Imperative requirements through one or more approved exceptions.
- LBC RED LIST FREE (RLF)** products disclose 100% of ingredients present at or above 100 ppm (0.01%) in the final product and do not contain any Red List chemicals.

Need more information? Visit [oclighting.com/declare](https://www.oclighting.com/declare) to learn more.

COMMON MODIFICATIONS

WE'RE BUILT FOR OUT-OF-THE-BOX THINKERS.

Nearly 50% of OCL fixtures we manufacture have some type of modification. Here is a list of common modifications we frequently produce. **Please contact the factory for modifications specific to your fixture or project.**

Need some help? Simply send your questions to us at OCL-Quotes@ocl.com

- BIOS, TUNABLE WHITE, WARM-DIM, & RGBW LIGHT SOURCES
- SPECIFIC LUMEN OUTPUT
- MODIFIED CLUSTERS OR CONFIGURATIONS / MULTI-DROP CANOPIES
- VARIOUS SHAPES, ARCS, AND CURVES FOR LINEAR PROFILES AND RINGS
- CEILING OR SURFACE MOUNTING
- LARGE SCALE MODIFICATIONS
- RAL, PANTONE, BRAND-SPECIFIC, RETIRED OCL COLOR, OR CUSTOM FINISHES



- EMERGENCY BATTERY BACKUP OR INVERTER OPTIONS
- REMOTE DRIVERS / EXTENDED DISTANCE REMOTE DRIVERS
- DIMMING TO 0.1% (DIM TO DARK)
- NON-STANDARD SIZES OR LENGTHS
- NON-STANDARD CANOPY, BODY AND/OR CORD COLORS
- SEISMIC AND/OR ANTI-SWAY SYSTEMS
- RIGID STEMS
- MODIFIED OVERALL HEIGHTS (LONGER OR SHORTER OAH)
- UPLIGHT ADDITIONS
- LASER ETCHING, ENGRAVING, AND CUTOUTS

The drawings and specifications and ideas, designs and arrangements represented on these drawings are and shall remain the property of The Original Cast Lighting (OCL Architectural Lighting) and no part thereof shall be copied, disclosed, to others or used in conjunction with any work or project other than the specified project for which they have been prepared and developed, without written consent of OCL. Visual contact with these plans or specifications shall constitute conclusive evidence of acceptance of these restrictions. All specifications and information subject to change without notice.