



GLOWRING™


4" W X 4" H PROFILE AND 24", 36", 48", 60" AND 72" DIAMETERS / SEAMLESS ONE PIECE MOLDED DIFFUSER / FULLY ENCLOSED TOP SURFACE TO ELIMINATE DUST AND BUG ACCUMULATION / AVAILABLE WITH METAL TRIM ON INNER DIAMETER OR OUTER DIAMETER / EFFICACY UP TO 100 LUMENS PER WATT DELIVERED



OPTIONAL METAL TRIM
ON INNER DIAMETER




OPTIONAL METAL TRIM
ON OUTER DIAMETER

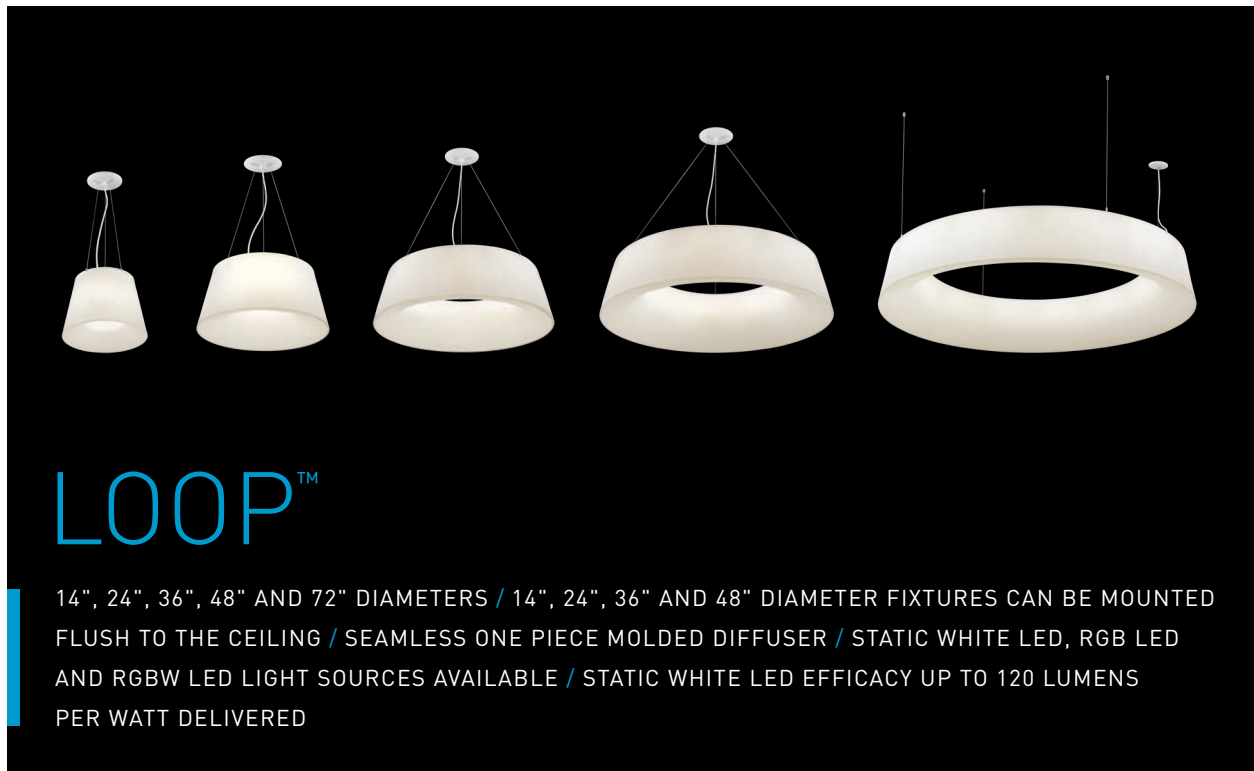

LOOP™

14", 24", 36", 48" AND 72" DIAMETERS / 14", 24", 36" AND 48" DIAMETER FIXTURES CAN BE MOUNTED FLUSH TO THE CEILING / SEAMLESS ONE PIECE MOLDED DIFFUSER / STATIC WHITE LED, RGB LED AND RGBW LED LIGHT SOURCES AVAILABLE / STATIC WHITE LED EFFICACY UP TO 120 LUMENS PER WATT DELIVERED

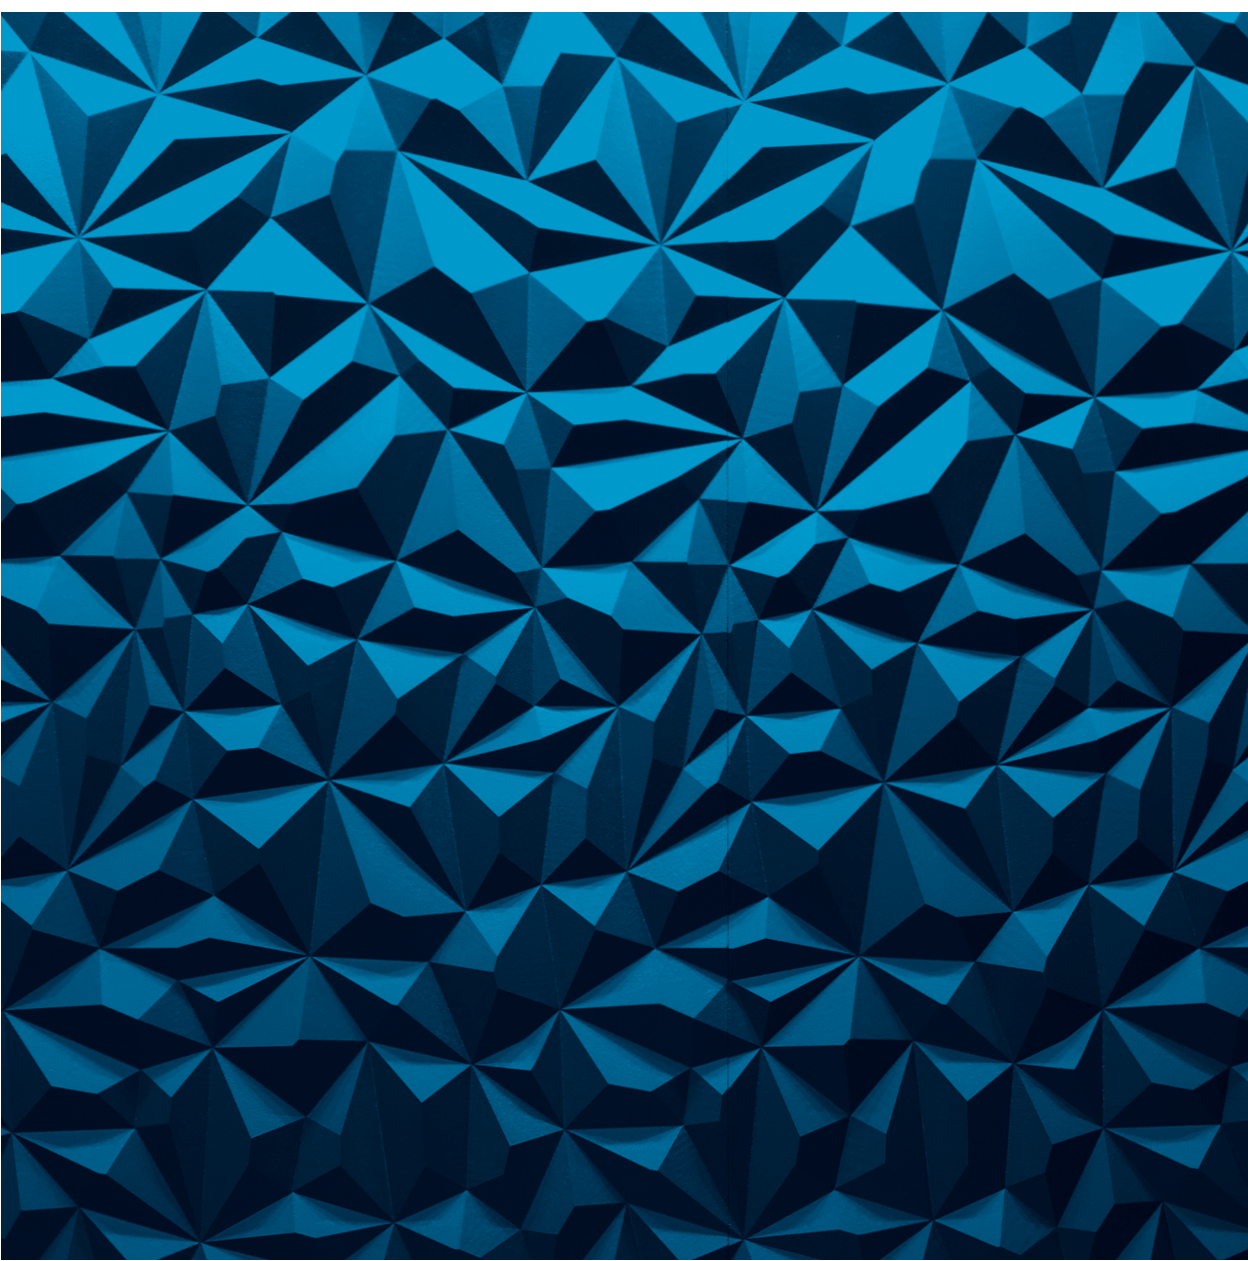

11902 LACKLAND ROAD
ST. LOUIS, MISSOURI 63146
PHONE: 314.863.1895
FAX: 314.863.3278

DETAILED SPECIFICATIONS
INFORMATION AVAILABLE AT:
WWW.OCL.COM

ALL PRODUCTS ARE:
 MADE IN USA

©2014 OCL, ALL RIGHTS RESERVED





SOLO™

3.25" W X 4.25" H PROFILE AND 24", 36", 48", 60", 72", 96" AND 120" DIAMETERS STANDARD / CUSTOM SIZES AND SHAPES POSSIBLE / DOWN ILLUMINATION ONLY / INTEGRAL DRIVERS / AVAILABLE AS SURFACE CEILING MOUNT / FIXTURES CAN BE CLUSTERED TOGETHER TO CREATE LARGE-SCALE INSTALLATIONS




FIORI™

5.5" DIAMETER X 8" OR 13" TALL EXTRUDED AND MACHINED ALUMINUM BODY / AVAILABLE AS A PENDANT, CEILING MOUNT OR SCOFFCE WITH SINGLE OR DUAL DIRECTION ILLUMINATION / ETL LISTED FOR WET LOCATION / OPTIONAL HEX CELL LOUVER, SOFTENING LENS, SPREAD LENS, LINEAR LENS / LED LIGHT SOURCE WITH 1,000, 2,000 OR 3,000 LUMEN OUTPUT / EFFICACY UP TO 94 LUMENS PER WATT DELIVERED

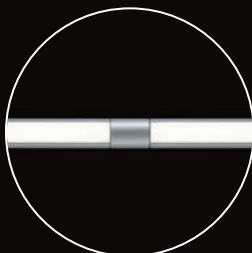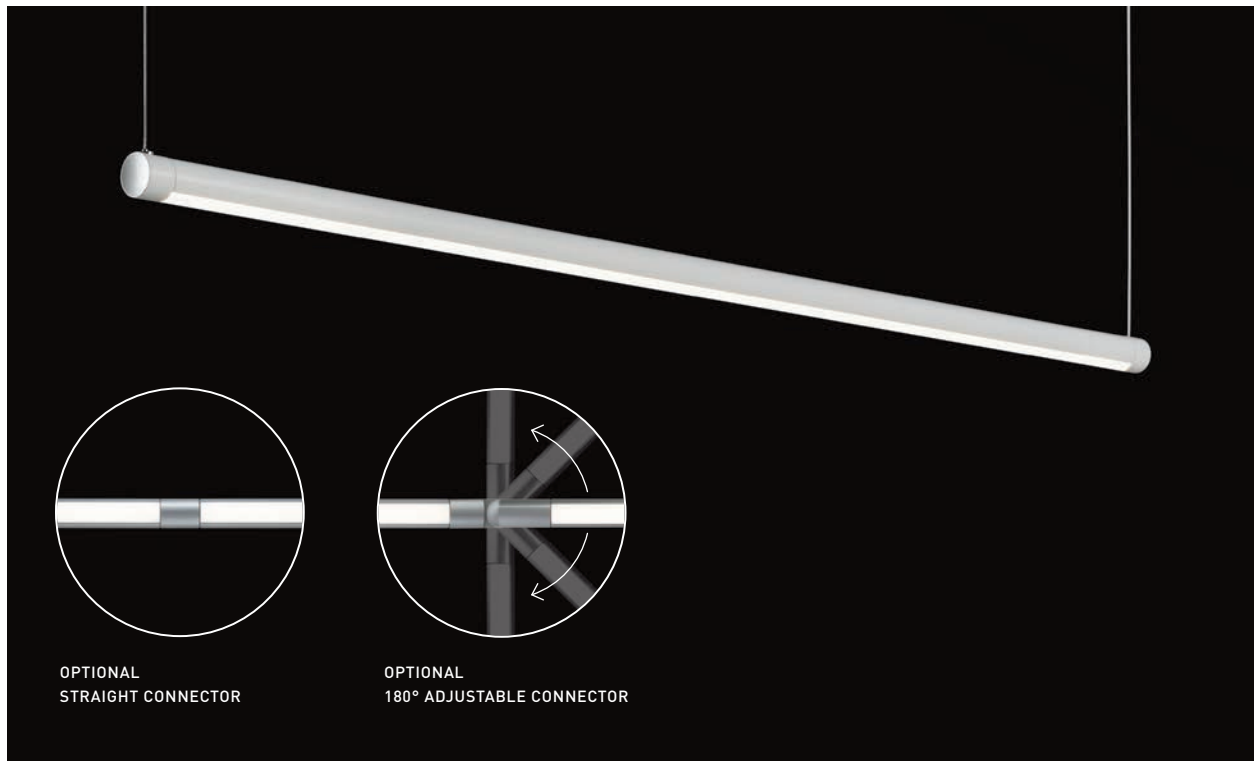

OPTIONAL
STRAIGHT CONNECTOR

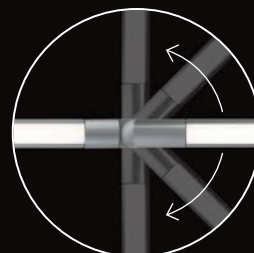

OPTIONAL
180° ADJUSTABLE CONNECTOR

DASH™

1.25" DIAMETER EXTRUDED AND MACHINED ALUMINUM BODY AND END CAPS / EXTRUDED HIGH-PERFORMANCE DIFFUSER / FIXTURE BODY IS ROTATABLE 350 DEGREES / AVAILABLE AS A PENDANT OR SCOFFCE / SINGLE UNIT OR CONNECTABLE / LED EFFICACY UP TO 100 LUMENS PER WATT DELIVERED



TWIN™

3.25" W X 4" H PROFILE AND 24", 36", 48", 60", 72", 96" AND 120" DIAMETERS STANDARD / CUSTOM SIZES AND SHAPES POSSIBLE / UP AND DOWN ILLUMINATION / INTEGRAL DRIVERS / FIXTURES CAN BE CLUSTERED TOGETHER TO CREATE LARGE-SCALE INSTALLATIONS



ARO™

1.5" DIAMETER CROSS SECTION AND 24", 36", 48", 60" AND 72" DIAMETERS STANDARD / CUSTOM SIZES AND SHAPES POSSIBLE / AVAILABLE WITH INNER OR OUTER ILLUMINATION / FIXTURES CAN BE CLUSTERED TOGETHER TO CREATE LARGE-SCALE INSTALLATIONS



GLOWSTICK™

1.5" DIAMETER X 12" TALL EXTRUDED AND MACHINED ALUMINUM BODY / DIFFUSER LENGTH FROM 2" TO 24" / EXTRUDED AND MACHINED END-LIT ACRYLIC ROD / AVAILABLE AS A SCOFFCE, PENDANT OR CUSTOM CLUSTER CONFIGURATIONS / LED EFFICACY UP TO 68 LUMENS PER WATT DELIVERED

